



# Marine engine programme

**MAN Energy Solutions**

2019



All data provided in this document is non-binding. This data serves informational purposes only and is especially not guaranteed in any way.

Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

If this document is delivered in another language than English and doubts arise concerning the translation, the English text shall prevail.

# Contents


MAN B&W two-stroke propulsion engines	<b>6</b>
MAN B&W two-stroke propulsion systems	<b>108</b>
MAN four-stroke propulsion engines	<b>118</b>
MAN four-stroke marine GenSets	<b>154</b>
S.E.M.T. Pielstick four-stroke propulsion engines	<b>186</b>
MAN four-stroke propulsion systems	<b>192</b>
MAN turbochargers and exhaust gas systems	<b>208</b>
MAN PrimeServ	<b>222</b>
Contacts	<b>228</b>

# MAN ECO CONTROL

Rely on our solutions  
to optimize  
your performance



We offer a range of technologies and services designed to enhance the sustainability of your ships. Our portfolio of especially developed solutions helps you lower emissions, increase efficiency and make operation more flexible and reliable.

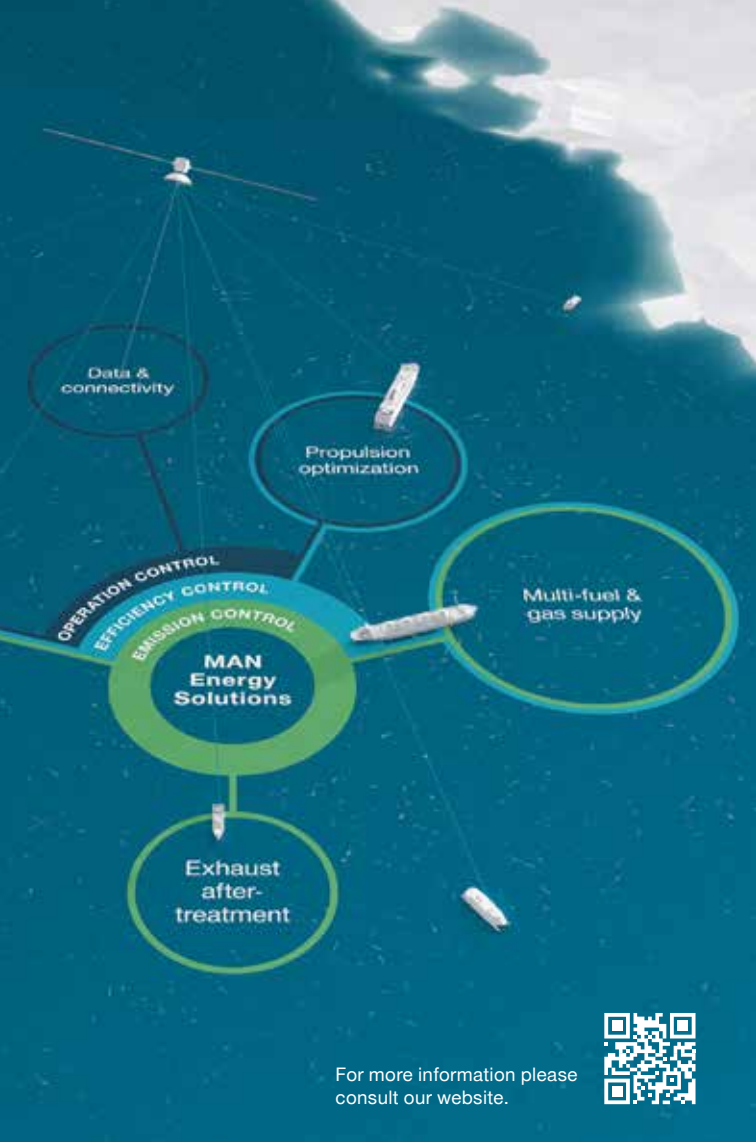

Data &  
connectivity

Propulsion  
optimization


Multi-fuel &  
gas supply

**MAN  
Energy  
Solutions**

Exhaust  
after-  
treatment



For more information please  
consult our website.

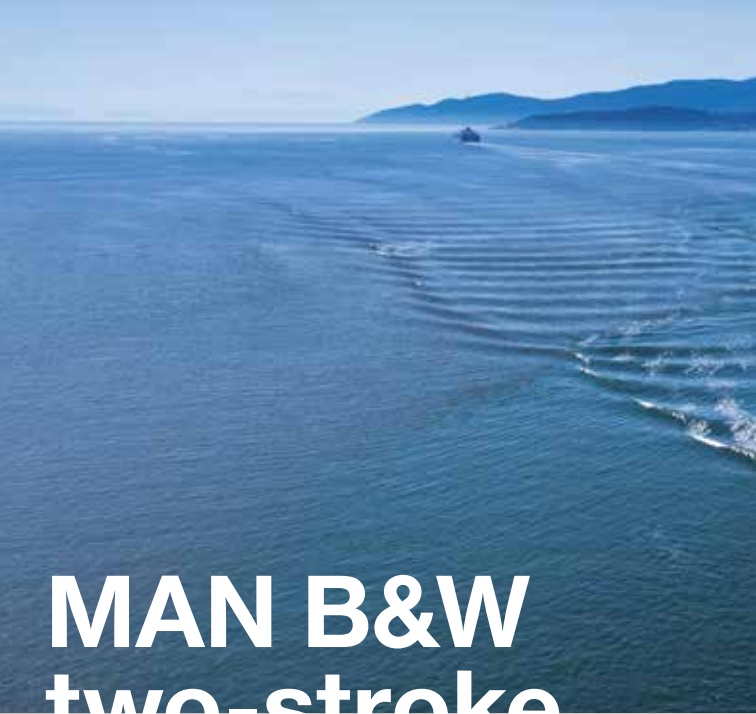

# **MAN B&W two-stroke propulsion engines**



## MAN Energy Solutions Tier II and Tier III engine programme

The two-stroke engines in this programme are either:

- Tier II engines complying with IMO Tier II
- Tier III engines complying with Tier II when operated in Tier II mode and with Tier III when operated in Tier III mode

Latest updates on engine development and options are available at: [www.marine.man-es.com](http://www.marine.man-es.com) → Two-Stroke → Market Update Notes (MUN)

### Engine type designation

To ensure that the engine designation describes the engine with regard to the fuel injection concept and applied Tier III technologies, the engine type designation also includes these concepts as described below (full designation, see page 18):

8S70ME-C10.5-GI-EcoEGR

- Tier III technology (EcoEGR, EGRBP, EGRTC, HPSCR, LPSCR)  
No designation = Tier II
- Fuel injection concept (GI, GIE, LGIM, LGIP)  
No designation = MDO/HFO

Tier III technologies and fuel injection concepts are explained in detail on page 12 (GI and LGI Dual Fuel Engines) and page 13 (Tier III Technologies).

### ME-C and ME-CR engines

The electronic control of the ME-C and ME-CR engines includes flexible control of the cylinder process, i.e. fuel injection timing and actuation of exhaust valves, starting valves and cylinder lubrication. The ME-C fuel injection concept is based on pressure boosting at the individual cylinders whereas the ME-CR engine is using a common rail fuel injection system.

### ME-B engines

ME-B engines use electronically controlled pressure boosters for the fuel injection whereas actuation of the exhaust valves is camshaft operated, but with electronically controlled variable closing timing.

## **CEAS and turbocharger selection**

CEAS and TCS applications include all available Tier II, Tier III technologies and dual fuel options. These applications include all available engines and variants, and specifications can be further investigated with respect to basic data essential for the design and dimensioning of a ship's engine room (CEAS) and applicable turbochargers (TCS).

CEAS and TCS are available at: [www.marine.man-es.com](http://www.marine.man-es.com) → Two-Stroke under CEAS Engine Calculations and Turbocharger Selection.

In CEAS and TCS, all engines in this programme can be selected from the category 'Official Catalogue'.

Earlier versions of this engine programme mention additional engine types. Some of these are still available in CEAS and TCS under the category 'Replaced Catalogue'. New development will only be implemented in these designs to the extent considered necessary based on service experience. New efficiency enhancing features will not be available on older engine types.

### **Engine power**

The engine brake power is stated in kW. The power values stated in the tables are available up to tropical conditions at sea level, i.e.:

- turbocharger inlet air temperature 45°C
- turbocharger inlet air pressure 1,000 mbar
- cooling water (sea/fresh) temperature 32/36°C

### **Specific fuel oil consumption (SFOC)**

The figures in the two-stroke chapter represent the values obtained when the engine and turbocharger are matched to the lowest possible SFOC values while fulfilling the IMO NO<sub>x</sub> Tier II or Tier III emission limits.

The SFOC figures are given in g/kWh and are based on the use of a fuel oil with a lower calorific value (LCV) equal to 42,700 kJ/kg at ISO conditions:

- turbocharger inlet air temperature 25°C
- turbocharger inlet air pressure 1,000 mbar
- cooling water temperature 25°C

Most commercially available HFOs with a viscosity below 700 cSt at 50°C can be used.

### **Tolerances**

The energy efficiency design index (EEDI) has increased focus on part-load SFOC. Therefore, we offer the option of selecting the SFOC guarantee at a load point in the range from 50% to 100%. It is recommended that the SFOC guarantee point should be limited to the range 50% to 85% for part-load or low-load tuning methods.

When choosing an SFOC guarantee at or below 100%, the tolerances, adjustment and calibration at 100% will affect an engine running at the lower SFOC guarantee load point. This includes tolerances on measurement equipment, engine process control and turbocharger performance.

Consequently, SFOC guarantee tolerances are as follows:

- 5% tolerance for 100-85% engine load
- 6% tolerance for <85-65% engine load
- 7% tolerance for <65-50% engine load

Please note that the SFOC guarantee can only be given in one load point for Tier II engines. For Tier III engines see page 13.

### **Turbocharging system**

Two-stroke engines can be delivered with MAN, ABB or MHI turbochargers as standard.

The SFOC figures given in the two-stroke chapter are based on turbocharging with the best possible turbocharging efficiency generally available, which means 67% for all engines with 45-cm bore and larger, and 64% for engine bores smaller than 45 cm. Both efficiency figures refer to 100% SMCR.

There are exceptions to this rule. Both S40ME-C9.5 and S35ME-CR9.7-GI are now standard high-efficiency applications offering all Tier II standard tunings and all Tier III options requiring a high-efficiency turbocharger.

The S35ME-B9.7 is also available as high-efficiency applications offered

with high-load tuning and Tier III options with conventional-efficiency turbocharging.

Only engine specifications for which an applicable high-efficiency turbocharger is available are subject to firm order.

All Tier II engines with high-efficiency (67%) turbochargers can be ordered with lower (conventional) turbocharging efficiency. Utilising this possibility will result in higher exhaust gas temperatures, lower exhaust gas amounts, and a slight change in SFOC. It is not possible to apply tuning methods (part- or low-load) when making such a conversion.

### **Fuel consumption and optimisation possibilities for Tier II engines**

Various optimisation possibilities for improved part-load and low-load SFOC are available for the MAN B&W type engines. High-load optimisation is for best possible SFOC at 100% engine load.

Optimisation of SFOC in the part-load range (50-85%) or low-load range (25-70%) requires selection of the EGB (exhaust gas bypass) tuning method.

Also high-pressure tuning (HPT) is available on request for ME-C engines.

Engine Process Tuning (EPT) tuning is available for G95ME-C10.5, G80ME-C10.5 and G60ME-C10.5. EPT uses engine control process parameters to improve part/low load SFOC.

The tuning methods mentioned are available for all SMCR points, but cannot be combined. The SFOC reduction potential of each tuning method at L<sub>1</sub> rating can be seen on each individual engine page.

In cases where part-load or low-load EGB tuning is applied, and a higher exhaust gas temperature is needed, a solution exists for additional automatic control of the EGB, the so-called economiser energy control (EEC).

Forcing an open EGB at loads where the EGB is normally closed results in a higher exhaust gas temperature, but with an SFOC penalty. Calculations with this feature are made on request.

## GI and LGI dual fuel engines

This engine programme includes a number of engines designed for gas fuel (GI engines) and liquid gas fuel (LGI engines) operation.

Fuel	Fuel designation	LCV [kJ/kg]
<b>Methane</b>	GI	50,000
<b>Ethane</b>	GIE	47,500
<b>Methanol</b>	LGIM	19,900
<b>LPG*</b>	LGIP	46,000

\*LPG is a mixture of liquid propane and butane.

In this engine programme, GI figures are included for engines where GI is applicable. As examples, figures for GIE and LGIP are included for S60ME-C10.5 and G60ME-C10.5 engines, and figures for GIE and LGIM are included for the G50ME-C9.6 engine (see pages 94-107).

In dual fuel mode, the pilot oil energy fraction [%] amounts to 1.5% for GI and GIE, 3% for LGIP and 5% for LGIM of  $L_1$  rating

GI and GIE engines are also available in fuel oil mode optimised versions where the pilot oil energy fraction amounts to 3.0% of  $L_1$  rating.

The following fuel consumption figures are shown in the tables for dual fuel engines:

- dual fuel mode with distribution of specific gas consumption (SGC) and specific pilot oil consumption (SPOC)
- fuel oil mode

All types of GI engines can operate with fuel sharing, also referred to as specified dual fuel (SDF) operation, where the ratio between pilot fuel oil and gas fuel can be selected according to preset values.

Guarantee figures for dual fuel engines are given for heat rate, which has the same tolerances as SFOC guarantees, i.e. see page 10.

Heat rate is defined as follows (example for methane as dual fuel):

$$\text{Heat rate (kJ/kWh)} = \text{SGC (g/kWh)} \times 50 \text{ kJ/g} + \text{SPOC (g/kWh)} \times 42.7 \text{ kJ/g}$$

Distribution between SGC and SPOC as well as the heat rate over the load range are available in the CEAS report.

Please note that dual fuel engines must have cylinder lubrication systems capable of supplying both low-BN lubricating oils and high-BN lubricating oils.

### **Greenhouse gas emissions**

IMO has developed the EEDI (energy efficiency design index) with CO<sub>2</sub> as the only greenhouse gas (GHG) emission accounted for. However, IMO is evaluating the possibilities for developing legislation on other GHGs than CO<sub>2</sub>. Especially methane is in focus, as it is a very strong GHG and, accordingly, IMO is evaluating the possibilities for introducing legislation on methane slip with short notice as a first measure. In order to be prepared for possible legislation on methane emissions, especially from GI engines, MAN Energy Solutions will, for the complete two-stroke engine programme, be prepared to guarantee a maximum methane slip of 0.35 g/kWh.

### **Tier III technologies**

To ensure compliance with IMO Tier III regulations, EGR or SCR NO<sub>x</sub> reduction technology must be selected. The preferred technology depends on market demands, engine size, other requirements and operational pattern.

See our Emission Project Guide for more detailed descriptions of these technologies at [www.marine.man-es.com](http://www.marine.man-es.com) → Two-Stroke → Project Guides → Other Guides → Emission Project Guide

All Tier III engines have at least two operating modes:

- Tier III mode fulfilling the IMO Tier III regulations
- Tier II mode fulfilling the IMO Tier II regulations

Tier III technologies are designed for either low-sulphur fuels (<0.1%) or high-sulphur fuels (>0.5% and <3.5%) in Tier III operation. In Tier II operation, the engine is in all cases capable of using fuels with a high sulphur content. The fuel sulphur content must be selected at engine order as it impacts the engine design.

Fuel consumption guarantees can be given for engines for both Tier II and Tier III mode.

## EGR

Two EGR-matching concepts are available depending on engine bore:

- **EGRTC:** T/C cut-out matching for ME-C engines with bores  $\geq 80$  cm and more than one turbocharger applied
- **EGRBP:** Bypass matching for ME-C engines with bores  $\leq 70$  cm and one high efficiency turbocharger applied.

EGR operation is also possible for dual fuel engines, except GIE.

SCR is recommended for the small bore ME-B engines. However, if EGR is the preferred Tier III technology for an ME-B engine, please contact MAN Energy Solutions.

## EcoEGR

EcoEGR is an SFOC optimised version of the EGRBP system available on all ME-C engines with high-efficiency turbochargers. Compared to the standard EGRBP system the EcoEGR engines operate with 10–15% recirculation in Tier II mode and with slightly increased recirculation in Tier III mode. For EcoEGR engines running on low-sulphur fuels ( $<0.5$  %S), considerable overall savings are obtained. For high-sulphur fuels the overall benefits must be calculated on a case-to-case basis.

EcoEGR operation is also possible for dual fuel engines, except GIE.

If EcoEGR is the preferred Tier III technology on ME-B engines, please contact MAN Energy Solutions.

## SCR

Two SCR concepts are available:

- **HPSCR:** High-pressure SCR with reactor installed upstream the turbocharger(s)
- **LPSCR:** Low-pressure SCR with reactor installed downstream the turbocharger(s)

SCR operation applies to ME-C and ME-B engines, including engine types with dual fuel. For some large-bore engines (bore  $\geq 90$  cm) with a high cylinder number, HPSCR is only available on special request.

The SCR system must be supplied by an approved supplier.

### **Application of high-sulphur fuels and SO<sub>x</sub> scrubbers**

All two-stroke engines in the MAN Energy Solutions marine engine programme are compatible with SO<sub>x</sub> scrubbers.

A SO<sub>x</sub> scrubber installation will increase the back pressure, thereby affecting engine performance. Accordingly, we require that a SO<sub>x</sub> scrubber installation does not increase the back pressure by more than 30 mbar at SMCR.

CEAS is updated with the SO<sub>x</sub> scrubber options available.

### **Fuels after 2020**

From 1 January 2020, the global sulphur content for marine fuels must not exceed 0.5%. To ensure compliant operation, one of the following methods must be used:

- Use a compliant fuel:
- **Global:** max. 0.5% Sulphur
- **ECA:** max. 0.1% sulphur
- Use methane, ethane, methanol or LPG together with compliant pilot fuel.
- Use a high-sulphur fuel in combination with a SO<sub>x</sub> scrubber to obtain an exhaust gas SO<sub>x</sub> level equivalent to operation on a compliant fuel.

The fuel specification must be selected at engine order as it impacts the engine design.

### **Waste heat recovery systems**

Waste heat recovery systems (WHRS) are available on request for both Tier II and Tier III engines with high-efficiency turbochargers. Contact MAN Energy Solutions for further information.

## Lubricating oil consumption

The system oil consumption varies according to engine sizes and, operational and maintenance patterns.

### Specific Cylinder Oil Consumption

Alpha ACC (Adaptive Cylinder-oil Control) is the lubricating mode for MAN B&W two-stroke engines that involves lube dosing proportional to the engine load and to the sulphur content in the fuel being burned.

Our general strategy is:

- Use low-BN oil for low-sulphur fuels
- Use high-BN oil for high-sulphur fuels

Dosage:

- Low-sulphur fuels: min. 0.6 g/kWh
- High-sulphur fuels: typically  $0.3 \text{ g/kWh} \times \%S$  for a 100 BN oil

Our Service Letters SL2014-587 and SL2014-593 offer further information:  
[www.marine.man-es.com](http://www.marine.man-es.com) → Two-Stroke → Service Letters → SL2014-587 and SL2014-593

### Extent of delivery


The final and binding extent of delivery of MAN B&W two-stroke engines is to be supplied by our licensee, the engine maker, who should be contacted in order to determine the execution for the actual project.

To facilitate negotiations between the yard, the engine maker and the customer, a set of guiding 'Extent of Delivery' (EoD) forms are available in which MAN Energy Solutions's recommended basic and optional executions are specified.

The licensees may select a different extent of delivery as their standard.

## Engine dimensions

The minimum length  $L_{\min}$  is stated from the aft end of the crankshaft to the fore end of the engine.

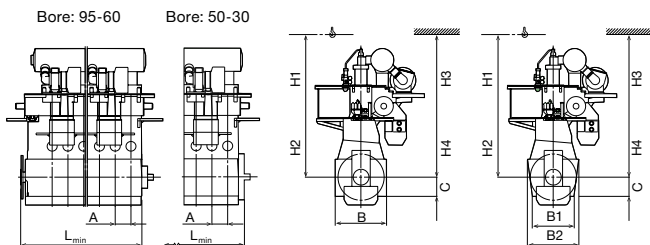

$L_{\min}$  Minimum length of engine

A Cylinder distance

B Bedplate width

B1 Bedplate width at foot flange

B2 Bedplate width at top flange

C Crankshaft to underside of foot flange

H1 Normal lifting procedure

H2 Reduced height lifting procedure

H3 Reduced height lifting procedure with MAN B&W double-jib crane

H4 Normal lifting procedure with MAN B&W double-jib crane

## Dry masses

Dry masses are stated in metric tonnes for engines with MAN turbocharger(s) and a standard turning wheel. Figures will vary depending on the design and options chosen, e.g. moment compensators, tuning wheel, etc.

Dry masses for Tier III engines cover components directly integrated on the engine.

Indicated values are for guidance only and are not binding.

## Engine type designation

8S70ME-C10.5-GI-EcoEGR

- Tier III technology  
(blank) Tier II only  
EcoEGR EGR in Tier II and Tier III mode  
EGRBP EGR with bypass matching  
EGRTC EGR with TC cut-out matching  
HPSCR High-pressure SCR  
LPSCR Low-pressure SCR
- Fuel injection concept  
(blank) Fuel oil only  
GI Gas injection methane  
GIE Gas injection ethane  
LGIM Liquid gas injection methanol  
LGIP Liquid gas injection LPG
- Dot (.) number
- Mark number
- Engine concept  
ME-C Electronically controlled  
ME-B Exhaust valve controlled by camshaft  
ME-CR Electronically controlled with common rail
- Diameter of cylinder bore in cm
- Stroke/bore ratio  
G 'Green' ultra long stroke  
S Super long stroke
- Number of cylinders

For further useful information scan the QR codes:



Two-stroke  
project guides



CEAS Engine  
Calculations



Turbocharger  
Selection



# Future-proof your investments

**MAN Energy Solutions**  
Future in the making

## MAN B&W ME-LGIP engine

---

The 2020 SO<sub>x</sub> regulations throw the world of ocean transport into uncertainty. Our innovative dual-fuel LPG engine lets you de-risk shipbuilding investments and take back control.

By switching to LPG, you stay compliant while retaining the flexibility to take advantage of optimal fuel prices in the future. LPG also offers lower total cost of ownership, giving you a valuable edge in a competitive market.


Power into the future with confidence.

[www.man-es.com](http://www.man-es.com)



Cyl.	L <sub>1</sub> kW
5	34,350
6	41,220
7	48,090
8	54,960
9	61,830
10	68,700
11	75,570
12	82,440

Stroke: 3,460 mm/L<sub>1</sub> MEP: 21.0 bar

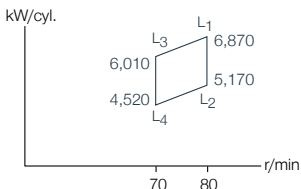

## Fuel oil

### MAN B&W G95ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	159.5	158.5	163.0
Part-load EPT	157.5	157.0	165.5
Low-load EPT	155.5	158.0	165.5

## GI (Methane)


### MAN B&W G95ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	129.5+3.9/159.5	129.5+2.9/161.0	136.3+2.4/168.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	34,350
6	41,220
7	48,090
8	54,960
9	61,830
10	68,700
11	75,570
12	82,440

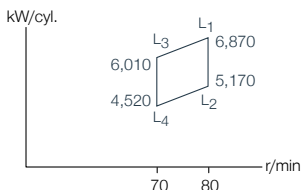**Stroke: 3,460 mm/L<sub>1</sub> MEP: 21.0 bar**


## Fuel oil

### MAN B&W G95ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	152.5	153.5	161.0
Tier III mode	161.5	160.5	165.0

### MAN B&W G95ME-C10.5-EGRTC

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	155.5	158.0	165.0
Tier III mode	161.5	161.5	167.0

### MAN B&W G95ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	155.5	158.0	165.5
Tier III mode	157.0	159.0	166.0

### MAN B&W G95ME-C10.5-LPSCR


#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	155.5	158.0	165.5
Tier III mode	156.5	159.0	166.5

\* Available on request for HPSCR.

Cyl.	L <sub>1</sub> kW
5	34,350
6	41,220
7	48,090
8	54,960
9	61,830
10	68,700
11	75,570
12	82,440

Stroke: 3,460 mm/L<sub>1</sub> MEP: 21.0 bar

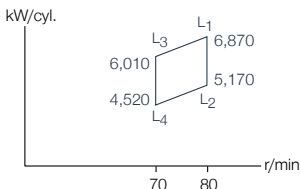

## GI (Methane)

### MAN B&W G95ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	126.9+3.9/152.5	128.5+3.0/156.0	135.4+2.5/166.0
<b>Tier III mode</b>	134.6+3.9/161.5	134.5+3.0/163.0	138.8+2.5/170.0

### MAN B&W G95ME-C10.5-GI-EGRTC

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	129.4+4.0/155.5	132.4+3.0/160.5	138.8+2.5/170.0
<b>Tier III mode</b>	134.5+4.0/161.5	135.4+3.0/164.0	140.5+2.5/172.0

### MAN B&W G95ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	129.4+4.0/155.5	132.5+3.0/160.5	139.2+2.5/170.5
<b>Tier III mode</b>	130.7+4.0/157.0	133.3+3.0/161.5	139.6+2.5/171.0

### MAN B&W G95ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	129.4+4.0/155.5	132.5+3.0/160.5	139.2+2.5/170.5
<b>Tier III mode</b>	130.3+4.0/156.5	133.3+3.0/161.5	140.1+2.5/171.5

\* Available on request for HPSCR.

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B	C	H1	H4
mm	1,574	5,380	2,060	16,100	15,900

Cyl. distance	5-9 cyl.	10 cyl.	11 cyl.	12 cyl.
mm	1,574	1-6: 1,574	1-6: 1,574	1-6: 1,574
mm		7-10: 1,670	7-11: 1,670	7-12: 1,670

Cylinders:	5	6	7	8	9	10	11	12
L <sub>min</sub> mm	11,468	13,042	14,616	16,190	17,804	19,779	21,489	23,159

## Dry mass


Tier II	t	1,090	1,260	1,445	1,640	1,840	2,030	2,230	2,425
---------	---	-------	-------	-------	-------	-------	-------	-------	-------

## Tier III (added)

EcoEGR	t	11	13	14	15	29	29	31	33
EGR	t	11	13	14	15	29	29	31	33
HP SCR	t	10	15	15	15				
LP SCR	t	-	-	-	-	-	-	-	-


## Dual fuel (added)

GI	t	8	9	11	12	13	15	16	17
----	---	---	---	----	----	----	----	----	----

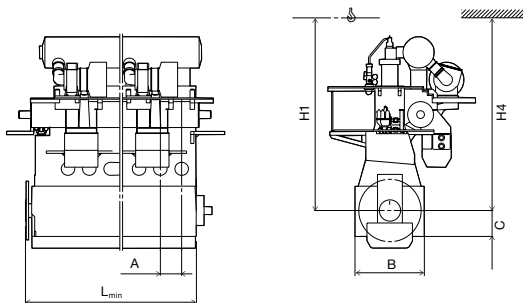

Cyl.	L <sub>1</sub> kW
5	31,200
6	37,440
7	43,680
8	49,920
9	56,160
10	62,400
11	68,640
12	74,880

Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.5 bar

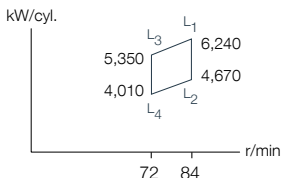

## Fuel oil

### MAN B&W G90ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	161.5	160.5	165.0
Part-load EGB	159.5	159.0	167.5
Low-load EGB	157.5	160.0	167.5

## GI (Methane)


### MAN B&W G90ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	131.2+3.9/161.5	131.2+3.0/163.0	138.0+2.5/170.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	31,200
6	37,440
7	43,680
8	49,920
9	56,160
10*	62,400
11*	68,640
12*	74,880

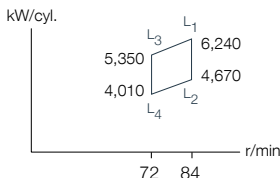Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.5 bar

## Fuel oil

## MAN B&amp;W G90ME-C10.5-EcoEGR

L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	154.5	155.5	163.0
Tier III mode	163.5	162.5	167.0

## MAN B&amp;W G90ME-C10.5-EGRTC

L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.0
Tier III mode	163.5	163.5	169.0

## MAN B&amp;W G90ME-C10.5-HPSCR

L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	159.0	161.0	168.0

## MAN B&amp;W G90ME-C10.5-LPSCR


L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	158.5	161.0	168.5

\* Available on request for HPSCR.

Cyl.	L <sub>1</sub> kW
5	31,200
6	37,440
7	43,680
8	49,920
9	56,160
10*	62,400
11*	68,640
12*	74,880

Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.5 bar

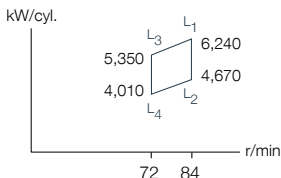

## GI (Methane)

### MAN B&W G90ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	128.5+4.0/154.5	130.2+3.0/158.0	137.1+2.5/168.0
<b>Tier III mode</b>	136.2+4.0/163.5	136.2+3.0/165.0	140.5+2.5/172.0

### MAN B&W G90ME-C10.5-GI-EGRTC

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.5+2.5/172.0
<b>Tier III mode</b>	136.2+4.0/163.5	137.1+3.1/166.0	142.2+2.5/174.0

### MAN B&W G90ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	132.3+4.0/159.0	135.0+3.1/163.5	141.3+2.5/173.0

### MAN B&W G95ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.7+2.5/173.5

\* Available on request for HPSCR.

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

## Specifications

Dimensions:	A	B1	B2	C	H1	H4
mm	1,490	5,110	5,034	1,885	14,425	13,975

Cylinders:	5	6	7	8	9	10	11	12
L <sub>min</sub> mm	10,740	12,040	12,855	14,345*	15,835*	18,040	19,530	21,020

## Dry mass

Tier II	t	892	1,034	1,162	1,316*	1,477*	1,619	1,786	1,915
---------	---	-----	-------	-------	--------	--------	-------	-------	-------


## Tier III (added)

EcoEGR	t	11	13	14	15	29	29	31	33
EGR	t	11	13	14	15	29	29	31	33
HPSCR	t	7	10	15	15	15			
LP SCR	t	-	-	-	-	-	-	-	-

## Dual fuel (added)


GI	t	7	8	9	10	12	13	14	15
----	---	---	---	---	----	----	----	----	----

\* 8-9-cylinder engines can be ordered with either divided or undivided crankshaft. Data is given for undivided crankshaft.

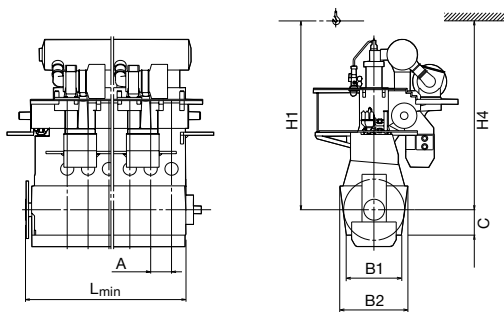

Cyl.	L <sub>1</sub> kW
5	30,500
6	36,600
7	42,700
8	48,800
9	54,900
10	61,000
11	67,100
12	73,200

Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S90ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	162.5	161.5	166.0
Part-load EGB	160.5	160.0	168.5
Low-load EGB	158.5	161.0	168.5

## GI (Methane)


### MAN B&W S90ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	132.0+3.9/162.5	132.0+3.0/164.0	138.8+2.5/171.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	30,500
6	36,600
7	42,700
8	48,800
9	54,900
10*	61,000
11*	67,100
12*	73,200

Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.0 bar

## Fuel oil

### MAN B&W S90ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	155.5	156.5	164.0
Tier III mode	164.5	163.5	168.0

### MAN B&W S90ME-C10.5-EGRTC

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	158.5	161.0	168.0
Tier III mode	164.5	164.5	170.0

### MAN B&W S90ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	158.5	161.0	168.5
Tier III mode	160.0	162.0	169.0

### MAN B&W S90ME-C10.5-LPSCR


#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	158.5	161.0	168.5
Tier III mode	159.5	162.0	169.5

\* Available on request for HPSCR.

Cyl.	L <sub>1</sub> kW
5	30,500
6	36,600
7	42,700
8	48,800
9	54,900
10*	61,000
11*	67,100
12*	73,200

Stroke: 3,260 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W S90ME-C10.5-GI-EcoEGR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	129.4+4.0/155.5	131.0+3.1/159.0	137.9+2.5/169.0
<b>Tier III mode</b>	137.1+4.0/164.5	137.0+3.1/166.0	141.3+2.5/173.0

### MAN B&W S90ME-C10.5-GI-EGRTC

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.3+2.6/173.0
<b>Tier III mode</b>	137.0+4.0/164.5	138.0+3.1/167.0	143.0+2.6/175.0

### MAN B&W S90ME-C10.5-GI-HPSCR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.7+2.5/173.5
<b>Tier III mode</b>	133.2+4.0/160.0	135.8+3.1/164.5	142.2+2.5/174.0

### MAN B&W S90ME-C10.5-GI-LPSCR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.7+2.5/173.5
<b>Tier III mode</b>	132.8+4.0/159.5	135.8+3.1/164.5	142.6+2.5/174.5

\* Available on request for HPSCR.

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:		A	B1	B2	C	H1	H4
mm		1,590	5,160	5,450	1,900	15,000	14,875

Cylinders:		5	6	7	8	9	10	11	12
L <sub>min</sub>	mm	10,312	11,902	13,492	16,135	17,725	19,315	20,905	22,495

# Dry mass



Tier II	t	953	1,104	1,255	1,446	1,626	1,771	1,942	2,088
---------	---	-----	-------	-------	-------	-------	-------	-------	-------

# Tier III (added)

EcoEGR	t	9	12	13	14	14	26	29	31
EGR	t	9	12	13	14	14	26	29	31
HPSCR	t	7	10	15	15	15			
LPSCR	t	-	-	-	-	-	-	-	-


# Dual fuel (added)

GI	t	7	9	10	11	12	13	15	16
----	---	---	---	----	----	----	----	----	----

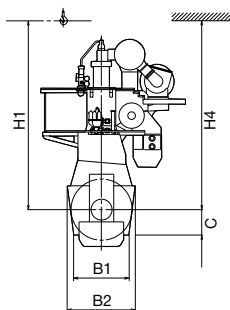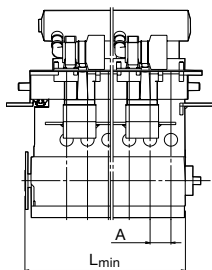

Cyl.	L <sub>1</sub> kW
6	28,260
7	32,970
8	37,680
9	42,390

Stroke: 3,720 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W G80ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	160.5	159.5	164.0
Part-load EPT	158.5	158.0	166.5
Low-load EPT	156.5	159.0	166.5

## GI (Methane)


### MAN B&W G80ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	130.3+3.9/160.5	130.4+3.0/162.0	137.1+2.4/169.0

Note: Also available for GIE and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
6	28,260
7	32,970
8	37,680
9	42,390

Stroke: 3,720 mm/L<sub>1</sub> MEP: 21.0 bar

## Fuel oil

### MAN B&W G80ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	153.5	154.5	162.0
Tier III mode	162.5	161.5	166.0

### MAN B&W G80ME-C10.5-EGRTC

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	159.0	166.0
Tier III mode	162.5	162.5	168.0

### MAN B&W G80ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	159.0	166.5
Tier III mode	158.0	160.0	167.0


### MAN B&W G80ME-C10.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	159.0	166.5
Tier III mode	157.5	160.0	167.5

Cyl.	L <sub>1</sub> kW
6	28,260
7	32,970
8	37,680
9	42,390

Stroke: 3,720 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W G80ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	127.7+4.0/153.5	129.5+3.0/157.0	136.2+2.5/167.0
<b>Tier III mode</b>	135.4+4.0/162.5	135.5+3.0/164.0	139.6+2.5/171.0

### MAN B&W G80ME-C10.5-GI-EGRTC

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	133.3+3.1/161.5	139.6+2.5/171.0
<b>Tier III mode</b>	135.4+4.0/162.5	136.3+3.1/165.0	141.3+2.5/173.0

### MAN B&W G80ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	133.3+3.0/161.5	140.1+2.5/171.5
<b>Tier III mode</b>	131.5+4.0/158.0	134.1+3.0/162.5	140.5+2.5/172.0

### MAN B&W G80ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	133.3+3.0/161.5	140.0+2.5/171.5
<b>Tier III mode</b>	131.1+4.0/157.5	134.1+3.0/162.5	140.9+2.5/172.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B1	B2	C	H1	H4
mm	-	-	-	-	-	-

Cylinders:	6	7	8	9
$L_{min}$ mm	-	-	-	-

# Dry mass

Tier II	t	898	1,002	1,115*	1,283
---------	---	-----	-------	--------	-------


# Tier III (added)

EcoEGR	t	11	12	13	14
EGR	t	11	12	13	14
HPSCR	t	6	10	10	15
LPSCR	t	-	-	-	-

# Dual fuel (added)


GI	t	7	8	9	9
----	---	---	---	---	---

\* Dry mass and cylinder  $L_{min}$  are with undivided crankshaft and chain in aft.

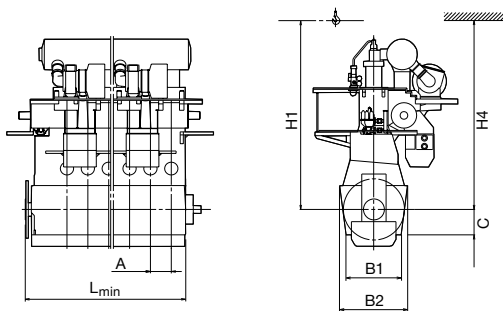

Cyl.	L <sub>1</sub> kW
6	27,060
7	31,570
8	36,080
9	40,590

Stroke: 3,450 mm/L<sub>1</sub> MEP: 20.0 bar



## Fuel oil

### MAN B&W S80ME-C9.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	164.5	162.0	166.0
Part-load EGB	161.5	160.5	167.5
Low-load EGB	159.5	161.5	167.5

## GI (Methane)


### MAN B&W S80ME-C9.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	133.7+3.9/164.5	132.5+3.0/164.5	138.8+2.5/171.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
6	27,060
7	31,570
8	36,080
9	40,590

Stroke: 3,450 mm/L<sub>1</sub> MEP: 20.0 bar

## Fuel oil

### MAN B&W S80ME-C9.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	157.0	164.0
Tier III mode	166.5	164.0	168.0

### MAN B&W S80ME-C9.5-EGRTC

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.0
Tier III mode	166.5	165.0	170.0

### MAN B&W S80ME-C9.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	161.0	162.5	168.0


### MAN B&W S80ME-C9.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	160.5	162.5	168.5

Cyl.	L <sub>1</sub> kW
6	27,060
7	31,570
8	36,080
9	40,590

Stroke: 3,450 mm/L<sub>1</sub> MEP: 20.0 bar



## GI (Methane)

### MAN B&W S80ME-C9.5-GI-EcoEGR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	131.5+3.1/159.5	137.9+2.5/169.0
<b>Tier III mode</b>	138.8+4.0/166.5	137.4+3.1/166.5	141.3+2.5/173.0

### MAN B&W S80ME-C9.5-GI-EGRTC

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.4+2.6/172.0
<b>Tier III mode</b>	138.7+4.0/166.5	138.4+3.1/167.5	143.0+2.6/175.0

### MAN B&W S80ME-C9.5-GI-HPSCR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	134.1+4.0/161.0	136.3+3.1/165.0	141.3+2.5/173.0

### MAN B&W S80ME-C9.5-GI-LPSCR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	133.6+4.0/160.5	136.3+3.1/165.0	141.7+2.5/173.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B<sub>1</sub></b>	<b>B<sub>2</sub></b>	<b>C</b>	<b>H1</b>	<b>H4</b>
<b>mm</b>	1,334	5,180	5,374	1,890	15,175	15,500

<b>Cylinders:</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L<sub>min</sub> mm</b>	10,100	11,434	12,768	14,102

**Dry mass**



<b>Tier II</b>	<b>t</b>	833	933	1,043	1,153
----------------	----------	-----	-----	-------	-------

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	11	12	13	14
<b>EGR</b>	<b>t</b>	11	12	13	14
<b>HPSCR</b>	<b>t</b>	6	10	10	15
<b>LPSCR</b>	<b>t</b>	-	-	-	-


**Dual fuel (added)**

<b>GI</b>	<b>t</b>	7	8	9	10
-----------	----------	---	---	---	----

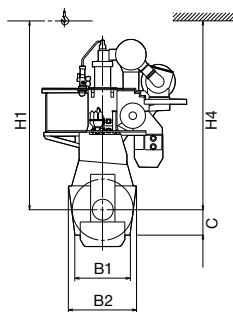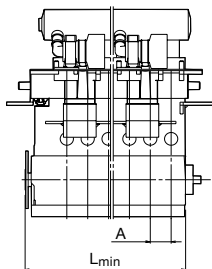

Cyl.	L <sub>1</sub> kW
5	15,500
6	18,600

Stroke: 3,256 mm/L<sub>1</sub> MEP: 19.0 bar



## Fuel oil

### MAN B&W G70ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	160.5	158.5	163.0
Part-load EGB	158.5	157.0	165.5
Low-load EGB	156.5	158.0	165.5

## GI (Methane)


### MAN B&W G70ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	130.4+3.9/160.5	129.8+2.9/161.0	136.3+2.4/168.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	15,500
6	18,600

Stroke: 3,256 mm/L<sub>1</sub> MEP: 19.0 bar

## Fuel oil

### MAN B&W G70ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	153.5	153.5	161.0
Tier III mode	162.5	160.5	165.0

### MAN B&W G70ME-C10.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	158.0	166.0
Tier III mode	163.5	162.5	168.0

### MAN B&W G70ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	158.0	165.5
Tier III mode	158.0	159.0	166.0


### MAN B&W G70ME-C10.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	158.0	165.5
Tier III mode	157.5	159.0	166.5

Cyl.	L <sub>1</sub> kW
5	15,500
6	18,600

Stroke: 3,256 mm/L<sub>1</sub> MEP: 19.0 bar



## GI (Methane)

### MAN B&W G70ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	127.7+3.9/153.5	128.6+3.0/156.0	135.4+2.5/166.0
<b>Tier III mode</b>	135.4+3.9/162.5	134.6+3.0/163.0	138.8+2.5/170.0

### MAN B&W G70ME-C10.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	132.4+3.1/160.5	139.6+2.5/171.0
<b>Tier III mode</b>	136.1+4.0/163.5	136.3+3.1/165.0	141.3+2.5/173.0

### MAN B&W G70ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	132.4+3.0/160.5	139.2+2.5/170.5
<b>Tier III mode</b>	131.5+4.0/158.0	133.3+3.0/161.5	139.6+2.5/171.0

### MAN B&W G70ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	132.4+3.0/160.5	139.2+2.5/170.5
<b>Tier III mode</b>	131.1+4.0/157.5	133.3+3.0/161.5	140.0+2.5/171.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

## Specifications

Dimensions:	A	B1	B2	C	H1
mm	1,044	4,470	4,628	1,750	14,000

<b>Cylinders:</b>		<b>5</b>		<b>6</b>
<b>L<sub>min</sub></b>	<b>mm</b>	7,452		8,496

## Dry mass


<b>Tier II</b>	<b>t</b>	521		586
----------------	----------	-----	--	-----

## Tier III (added)

<b>EcoEGR</b>	<b>t</b>	14		16
<b>EGR</b>	<b>t</b>	15		16
<b>HPSCR</b>	<b>t</b>	4		5
<b>LPSCR</b>	<b>t</b>	-		-


## Dual fuel (added)

<b>GI</b>	<b>t</b>	5		6
-----------	----------	---	--	---

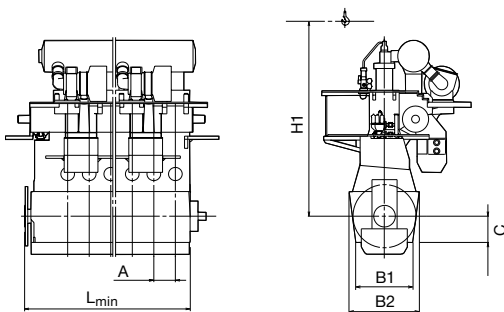

Cyl.	L <sub>1</sub> kW
5	18,200
6	21,840
7	25,480
8	29,120

Stroke: 3,256 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W G70ME-C9.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	165.5	163.0	167.0
Part-load EGB	162.5	161.5	168.5
Low-load EGB	160.5	162.5	168.5

## GI (Methane)


### MAN B&W G70ME-C9.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	134.5+4.0/165.5	133.3+3.0/165.5	139.6+2.5/172.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	18,200
6	21,840
7	25,480
8	29,120

**Stroke: 3,256 mm/L<sub>1</sub> MEP: 21.0 bar**


## Fuel oil

### MAN B&W G70ME-C9.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	158.5	158.0	165.0
Tier III mode	167.5	165.0	169.0

### MAN B&W G70ME-C9.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	160.5	162.5	169.0
Tier III mode	168.5	167.0	172.0

### MAN B&W G70ME-C9.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	160.5	162.5	168.5
Tier III mode	162.0	163.5	169.0


### MAN B&W G70ME-C9.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	160.5	162.5	168.5
Tier III mode	161.5	163.5	169.5

Cyl.	L <sub>1</sub> kW
5	18,200
6	21,840
7	25,480
8	29,120

Stroke: 3,256 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W G70ME-C9.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.9+4.0/158.5	132.3+3.1/160.5	138.7+2.5/170.0
<b>Tier III mode</b>	139.6+4.0/167.5	138.3+3.1/167.5	142.2+2.5/174.0

### MAN B&W G70ME-C9.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	133.6+4.1/160.5	136.2+3.1/165.0	142.1+2.6/174.0
<b>Tier III mode</b>	140.4+4.1/168.5	140.1+3.1/169.5	144.7+2.6/177.0

### MAN B&W G70ME-C9.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	133.6+4.0/160.5	136.2+3.1/165.0	141.7+2.5/173.5
<b>Tier III mode</b>	134.9+4.0/162.0	137.1+3.1/166.0	142.2+2.5/174.0

### MAN B&W G70ME-C9.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	133.6+4.0/160.5	136.2+3.1/165.0	141.7+2.5/173.5
<b>Tier III mode</b>	134.5+4.0/161.5	137.1+3.1/166.0	142.6+2.5/174.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

## Specifications

Dimensions:		A	B1	B2	C	H1	H2	H3
Fuel oil	mm	1,044	4,470	4,628	1,750	14,225	13,250	12,800
GI	mm	1,044	4,470	4,628	1,750	14,225	13,250	13,175

Cylinders:		5	6	7	8
L <sub>min</sub>	mm	7,452	8,496	10,856	12,116

## Dry mass


Tier II	t	585	665	750	855
---------	---	-----	-----	-----	-----

## Tier III (added)

EcoEGR	t	15	16	17	18
EGR	t	14	16	17	18
HPSCR	t	4	5	6	7
LPSCR	t	-	-	-	-


## Dual fuel (added)

GI	t	5	6	7	8
----	---	---	---	---	---

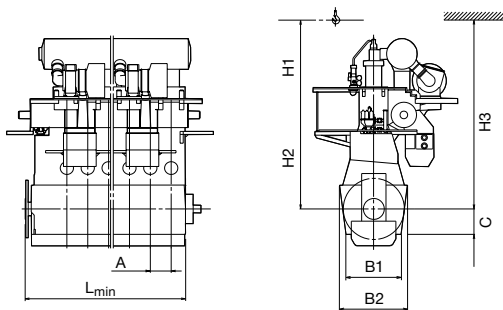

Cyl.	L <sub>1</sub> kW
5	17,150
6	20,580
7	24,010
8	27,440

Stroke: 2,800 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S70ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	164.5	162.0	166.0
Part-load EGB	161.5	160.5	167.5
Low-load EGB	159.5	161.5	167.5

## GI (Methane)


### MAN B&W S70ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	133.7+3.9/164.5	132.5+3.0/164.5	138.8+2.5/171.0

Note: Also available for GIE and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	17,150
6	20,580
7	24,010
8	27,440

**Stroke: 2,800 mm/L<sub>1</sub> MEP: 21.0 bar**


## Fuel oil

### MAN B&W S70ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	157.0	164.0
Tier III mode	166.5	164.0	168.0

### MAN B&W S70ME-C10.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	168.0
Tier III mode	167.5	166.0	171.0

### MAN B&W S70ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	161.0	162.5	168.0


### MAN B&W S70ME-C10.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	160.5	162.5	168.5

Cyl.	L <sub>1</sub> kW
5	17,150
6	20,580
7	24,010
8	27,440

Stroke: 2,800 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W S70ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	131.5+3.1/159.5	137.9+2.5/169.0
<b>Tier III mode</b>	138.8+4.0/166.5	137.4+3.1/166.5	141.3+2.5/173.0

### MAN B&W S70ME-C10.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	135.4+3.1/164.0	141.3+2.6/173.0
<b>Tier III mode</b>	139.6+4.1/167.5	139.2+3.1/168.5	143.8+2.6/176.0

### MAN B&W S70ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	134.1+4.0/161.0	136.3+3.1/165.0	141.3+2.5/173.0

### MAN B&W S70ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	133.6+4.0/160.5	136.3+3.1/165.0	141.7+2.5/173.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B1	B2	C	H1	H4
mm	1,098	4,012	4,140	1,520	12,500	11,825

Cylinders:	5	6	7	8
L <sub>min</sub> mm	7,446	8,544	9,642	10,740

# Dry mass


Tier II	t	424	502	563	634
---------	---	-----	-----	-----	-----

# Tier III (added)

EcoEGR	t	15	16	17	18
EGR	t	15	16	17	18
HPSCR	t	4	5	6	6
LPSCR	t	-	-	-	-


# Dual fuel (added)

GI	t	5	6	7	7
----	---	---	---	---	---

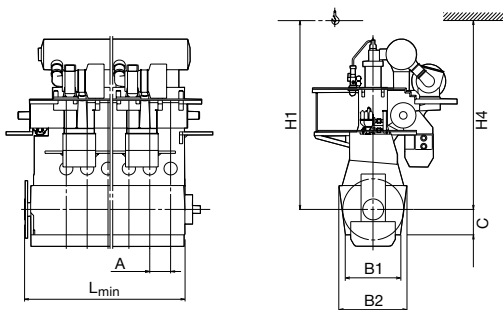

Cyl.	L <sub>1</sub> kW
5	13,650
6	16,380
7	19,110
8	21,840

Stroke: 2,730 mm/L<sub>1</sub> MEP: 19.0 bar



## Fuel oil

### MAN B&W S65ME-C8.6

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	164.5	161.5	165.5
Part-load EGB	161.5	160.0	167.0
Low-load EGB	159.5	161.0	167.0

## GI (Methane)


### MAN B&W S65ME-C8.6-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	133.7+3.9/164.5	132.0+3.0/164.0	138.3+2.5/170.5

Note: Also available for GIE and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	13,650
6	16,380
7	19,110
8	21,840

**Stroke: 2,730 mm/L<sub>1</sub> MEP: 19.0 bar**


## Fuel oil

### MAN B&W S65ME-C8.6-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	156.5	163.5
Tier III mode	166.5	163.5	167.5

### MAN B&W S65ME-C8.6-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.0	167.5
Tier III mode	167.5	165.5	170.5

### MAN B&W S65ME-C8.6-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.0	167.0
Tier III mode	161.0	162.0	167.5


### MAN B&W S65ME-C8.6-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.0	167.0
Tier III mode	160.5	162.0	168.0

Cyl.	L <sub>1</sub> kW
5	13,650
6	16,380
7	19,110
8	21,840

Stroke: 2,730 mm/L<sub>1</sub> MEP: 19.0 bar



## GI (Methane)

### MAN B&W S65ME-C8.6-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.0+4.0/157.5	131.1+3.0/159.0	137.4+2.5/168.5
<b>Tier III mode</b>	138.7+4.0/166.5	137.1+3.0/166.0	140.9+2.5/172.5

### MAN B&W S65ME-C8.6-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	134.9+3.1/163.5	140.8+2.6/172.5
<b>Tier III mode</b>	139.5+4.1/167.5	138.8+3.1/168.0	143.4+2.6/175.5

### MAN B&W S65ME-C8.6-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.0/159.5	135.0+3.1/163.5	140.4+2.5/172.0
<b>Tier III mode</b>	134.0+4.0/161.0	135.8+3.1/164.5	140.9+2.5/172.5

### MAN B&W S65ME-C8.6-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.0/159.5	135.0+3.1/163.5	140.4+2.5/172.0
<b>Tier III mode</b>	133.6+4.0/160.5	135.8+3.1/164.5	141.3+2.5/173.0

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	1,084	4,124	4,170	1,410	11,950	11,225	11,025

<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	7,148	8,232	9,316	10,400

**Dry mass**


<b>Tier II</b>	<b>t</b>	390	460	522	587
----------------	----------	-----	-----	-----	-----

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	14	15	16	17
<b>EGR</b>	<b>t</b>	14	15	16	17
<b>HPSCR</b>	<b>t</b>	4	5	6	6
<b>LPSCR</b>	<b>t</b>	-	-	-	-


**Dual fuel (added)**

<b>GI</b>	<b>t</b>	5	5	6	7
-----------	----------	---	---	---	---

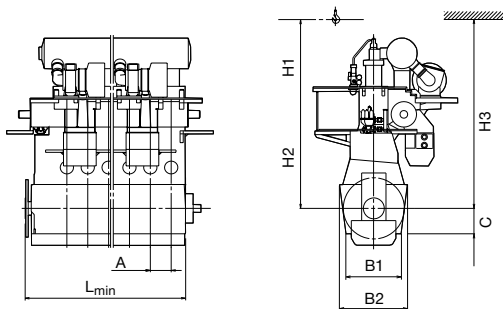

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W G60ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	161.5	160.5	165.0
Part-load EPT	159.5	159.0	167.5
Low-load EPT	157.5	160.0	167.5

## GI (Methane)


### MAN B&W G60ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	131.2+3.9/161.5	131.2+3.0/163.0	138.0+2.5/170.0

Note: Also available for GIE and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L<sub>1</sub> MEP: 21.0 bar

## Fuel oil

### MAN B&W G60ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	154.5	155.5	163.0
Tier III mode	163.5	162.5	167.0

### MAN B&W G60ME-C10.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	168.0
Tier III mode	164.5	164.5	170.0

### MAN B&W G60ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	159.0	161.0	168.0


### MAN B&W G60ME-C10.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	158.5	161.0	168.5

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W G60ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	128.5+4.0/154.5	130.3+3.0/158.0	137.1+2.5/168.0
<b>Tier III mode</b>	136.2+4.0/163.5	136.3+3.0/165.0	140.5+2.5/172.0

### MAN B&W G60ME-C10.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.0+4.1/157.5	134.1+3.1/162.5	141.3+2.6/173.0
<b>Tier III mode</b>	137.0+4.1/164.5	137.9+3.1/167.0	143.0+2.6/175.0

### MAN B&W G60ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	132.3+4.0/159.0	135.0+3.1/163.5	141.3+2.5/173.0

### MAN B&W G60ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.7+2.5/173.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	1,080	4,090	4,220	1,500	12,175	11,400	11,075

Cylinders:	5	6	7	8
L <sub>min</sub> mm	7,390	8,470	9,550	10,630

Dry mass


Tier II	t	395	439	491	543
---------	---	-----	-----	-----	-----

Tier III (added)

EcoEGR	t	14	14	15	16
EGR	t	14	14	15	16
HPSCR	t	3	4	5	5
LPSCR	t	-	-	-	-


Dual fuel (added)

GI	t	5	6	7	7
----	---	---	---	---	---

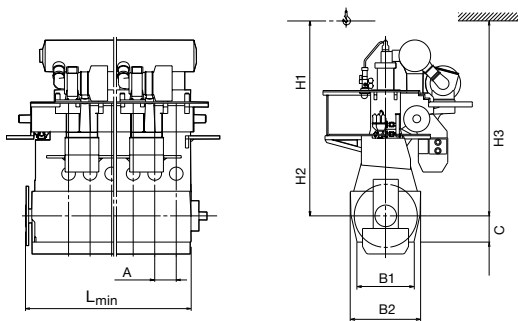

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

Stroke: 2,400 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S60ME-C10.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	164.5	162.0	166.0
Part-load EGB	161.5	160.5	167.5
Low-load EGB	159.5	161.5	167.5

## GI (Methane)


### MAN B&W S60ME-C10.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	133.7+3.9/164.5	132.5+3.0/164.5	138.8+2.5/171.0

Note: Also available for GIE and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

**Stroke: 2,400 mm/L<sub>1</sub> MEP: 21.0 bar**


## Fuel oil

### MAN B&W S60ME-C10.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	157.0	164.0
Tier III mode	166.5	164.0	168.0

### MAN B&W S60ME-C10.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	168.0
Tier III mode	167.5	166.0	171.0

### MAN B&W S60ME-C10.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	161.0	162.5	168.0


### MAN B&W S60ME-C10.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	161.5	167.5
Tier III mode	160.5	162.5	168.5

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

Stroke: 2,400 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W S60ME-C10.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	131.5+3.1/159.5	137.9+2.5/169.0
<b>Tier III mode</b>	138.8+4.0/166.5	137.4+3.1/166.5	141.3+2.5/173.0

### MAN B&W S60ME-C10.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	135.4+3.1/164.0	141.3+2.6/173.0
<b>Tier III mode</b>	139.6+4.1/167.5	139.2+3.1/168.5	143.8+2.6/176.0

### MAN B&W S60ME-C10.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	134.1+4.0/161.0	136.3+3.1/165.0	141.3+2.5/173.0

### MAN B&W S60ME-C10.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.8+4.0/159.5	135.4+3.1/164.0	140.9+2.5/172.5
<b>Tier III mode</b>	133.6+4.0/160.5	136.3+3.1/165.0	141.7+2.5/173.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	940	3,420	3,550	1,300	10,500	9,725	10,125

<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	6,502	7,442	8,382	9,322

**Dry mass**



<b>Tier II</b>	<b>t</b>	293	332	369	425
----------------	----------	-----	-----	-----	-----

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	14	14	15	16
<b>EGR</b>	<b>t</b>	14	14	15	16
<b>HPSCR</b>	<b>t</b>	3	4	5	5
<b>LPSCR</b>	<b>t</b>	-	-	-	-


**Dual fuel (added)**

<b>GI</b>	<b>t</b>	5	5	6	7
-----------	----------	---	---	---	---

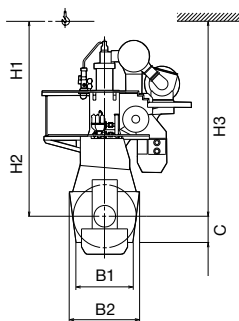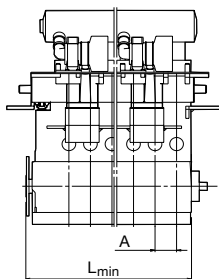

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W G50ME-C9.6

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	163.5	162.5	167.0
Part-load EGB	161.5	161.0	169.5
Low-load EGB	159.5	162.0	169.5

## GI (Methane)


### MAN B&W G50ME-C9.6-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	132.8+4.0/163.5	132.9+3.0/165.0	139.6+2.5/172.0

Note: Also available for GIE, LGIM and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L<sub>1</sub> MEP: 21.0 bar

## Fuel oil

### MAN B&W G50ME-C9.6-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	156.5	157.5	165.0
Tier III mode	165.5	164.5	169.0

### MAN B&W G50ME-C9.6-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	162.0	170.0
Tier III mode	166.5	166.5	172.0

### MAN B&W G50ME-C9.6-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	162.0	169.5
Tier III mode	161.0	163.0	170.0


### MAN B&W G50ME-C9.6-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	159.5	162.0	169.5
Tier III mode	160.5	163.0	170.5

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W G50ME-C9.6-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.2+4.0/156.5	131.9+3.1/160.0	138.7+2.5/170.0
<b>Tier III mode</b>	137.9+4.0/165.5	137.9+3.1/167.0	142.2+2.5/174.0

### MAN B&W G50ME-C9.6-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	135.8+3.1/164.5	143.0+2.6/175.0
<b>Tier III mode</b>	138.7+4.1/166.5	139.6+3.1/169.0	144.7+2.6/177.0

### MAN B&W G50ME-C9.6-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	135.8+3.1/164.5	142.6+2.6/174.5
<b>Tier III mode</b>	134.0+4.1/161.0	136.7+3.1/165.5	143.0+2.6/175.0

### MAN B&W G50ME-C9.6-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.7+4.1/159.5	135.8+3.1/164.5	142.6+2.6/174.5
<b>Tier III mode</b>	133.6+4.1/160.5	136.7+3.1/165.5	143.4+2.6/175.5

Note: Also available for GIE, LGIM and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	872	3,776	3,652	1,205	10,775	10,075	9,775

Cylinders:	5	6	7	8	9
L <sub>min</sub> mm	6,260	7,132	8,004	8,876	9,748

## Dry mass


Tier II	t	210	245	275	310	345
---------	---	-----	-----	-----	-----	-----

## Tier III (added)

EcoEGR	t	6	8	9	10	12
EGR	t	6	8	9	10	12
HPSCR	t	4	4	5	6	6
LPSCR	t	-	-	-	-	-


## Dual fuel (added)

GI	t	4	4	5	5	6
----	---	---	---	---	---	---

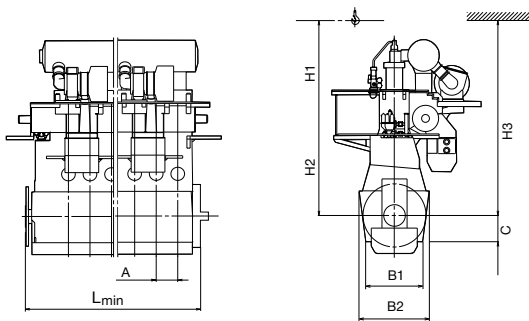

Cyl.	L <sub>1</sub> kW
5	8,900
6	10,680
7	12,460
8	14,240
9	16,020

Stroke: 2,214 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S50ME-C9.7

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	161.5	160.5	165.0
Part-load EGB	159.5	159.0	167.5
Low-load EGB	157.5	160.0	167.5

## GI (Methane)


### MAN B&W S50ME-C9.7-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	131.2+3.9/161.5	131.2+3.0/163.0	138.0+2.5/170.0

Note: Also available for GIE, LGIM and LGIP, see page 12

Cyl.	L <sub>1</sub> kW
5	8,900
6	10,680
7	12,460
8	14,240
9	16,020

**Stroke: 2,214 mm/L1 MEP: 21.0 bar**


## Fuel oil

### MAN B&W S50ME-C9.7-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	154.5	155.5	163.0
Tier III mode	163.5	162.5	167.0

### MAN B&W S50ME-C9.7-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	168.0
Tier III mode	164.5	164.5	170.0

### MAN B&W S50ME-C9.7-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	159.0	161.0	168.0


### MAN B&W S50ME-C9.7-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	157.5	160.0	167.5
Tier III mode	158.5	161.0	168.5

Cyl.	L <sub>1</sub> kW
5	8,900
6	10,680
7	12,460
8	14,240
9	16,020

Stroke: 2,214 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W S50ME-C9.7-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	128.5+4.0/154.5	130.2+3.0/158.0	137.1+2.5/168.0
<b>Tier III mode</b>	136.2+4.0/163.5	136.2+3.0/165.0	140.5+2.5/172.0

### MAN B&W S50ME-C9.7-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.0+4.0/157.5	134.1+3.1/162.5	141.3+2.6/173.0
<b>Tier III mode</b>	137.0+4.0/164.5	137.9+3.1/167.0	143.0+2.6/175.0

### MAN B&W S50ME-C9.7-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	132.3+4.0/159.0	135.0+3.1/163.5	141.3+2.5/173.0

### MAN B&W S50ME-C9.7-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.1+4.0/157.5	134.1+3.1/162.5	140.9+2.5/172.5
<b>Tier III mode</b>	131.9+4.0/158.5	135.0+3.1/163.5	141.7+2.5/173.5

Note: Also available for GIE, LGIM and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	875	3,350	3,290	1,190	9,875	9,125	8,850

Cylinders:	5	6	7	8	9
L <sub>min</sub> mm	6,073	6,948	7,823	8,698	9,573

# Dry mass


Tier II	t	193	223	259	289	320
---------	---	-----	-----	-----	-----	-----

# Tier III (added)

EcoEGR	t	7	8	9	11	12
EGR	t	7	8	9	11	12
HPSCR	t	4	4	5	6	7
LPSCR	t	-	-	-	-	-


# Dual fuel (added)

GI	t	4	4	5	5	6
----	---	---	---	---	---	---

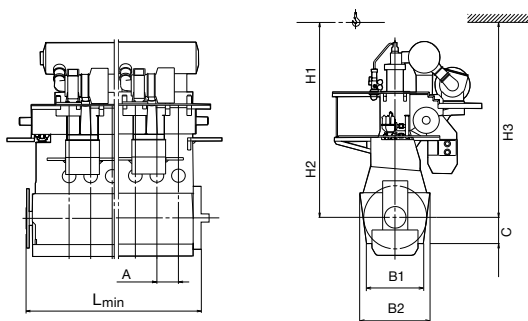

Cyl.	L <sub>1</sub> kW
5	8,300
6	9,960
7	11,620
8	13,280
9	14,940

Stroke: 2,000 mm/L<sub>1</sub> MEP: 20.0 bar



## Fuel oil

### MAN B&W S50ME-C8.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	168.5	166.0	170.0
Part-load EGB	165.5	164.5	171.5
Low-load EGB	163.5	165.5	171.5

## GI (Methane)


### MAN B&W S50ME-C8.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	137.0+4.0/168.5	135.8+3.1/168.5	142.2+2.5/175.0

Note: Also available for GIE and LGIP, see page 12.

Cyl.	L <sub>1</sub> kW
5	8,300
6	9,960
7	11,620
8	13,280
9	14,940

**Stroke: 2,000 mm/L1 MEP: 20.0 bar**


## Fuel oil

### MAN B&W S50ME-C8.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	161.5	161.0	168.0
Tier III mode	170.5	168.0	172.0

### MAN B&W S50ME-C8.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	172.0
Tier III mode	171.5	170.0	175.0

### MAN B&W S50ME-C8.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	171.5
Tier III mode	165.0	166.5	172.0


### MAN B&W S50ME-C8.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	171.5
Tier III mode	164.5	166.5	172.5

Cyl.	L <sub>1</sub> kW
5	8,300
6	9,960
7	11,620
8	13,280
9	14,940

Stroke: 2,000 mm/L<sub>1</sub> MEP: 20.0 bar



## GI (Methane)

### MAN B&W S50ME-C8.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	134.4+4.1/161.5	134.8+3.1/163.5	141.3+2.6/173.0
<b>Tier III mode</b>	142.1+4.1/170.5	140.8+3.1/170.5	144.7+2.6/177.0

### MAN B&W S50ME-C8.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.2/163.5	138.7+3.2/168.0	144.6+2.6/177.0
<b>Tier III mode</b>	142.9+4.2/171.5	142.6+3.2/172.5	147.2+2.6/180.0

### MAN B&W S50ME-C8.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.1/163.5	138.8+3.1/168.0	144.3+2.6/176.5
<b>Tier III mode</b>	137.4+4.1/165.0	139.6+3.1/169.0	144.7+2.6/177.0

### MAN B&W S50ME-C8.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.1/163.5	138.8+3.1/168.0	144.3+2.6/176.5
<b>Tier III mode</b>	137.0+4.1/164.5	139.6+3.1/169.0	145.1+2.6/177.5

Note: Also available for GIE and LGIP, except GIE and EGR, see pages 12-14.

# Specifications

Dimensions:	A	B	C	H1	H2	H3
mm	850	3,150	1,085	9,050	8,500	8,250

Cylinders:	5	6	7	8	9
L <sub>min</sub> mm	5,924	6,774	7,624	8,474	9,324

# Dry mass


Tier II	t	180	210	240	270	295
---------	---	-----	-----	-----	-----	-----

# Tier III (added)

EcoEGR	t	6	7	9	10	11
EGR	t	6	7	9	10	11
HPSCR	t	3	4	5	5	6
LPSCR	t	-	-	-	-	-


# Dual fuel (added)

GI	t	4	4	5	5	6
----	---	---	---	---	---	---

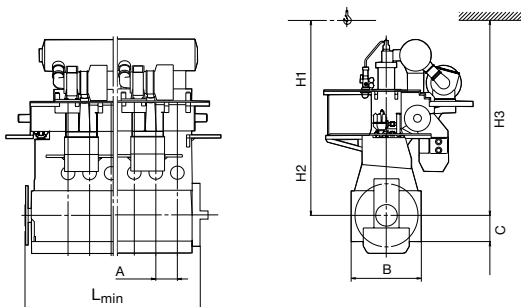

Cyl.	L <sub>1</sub> kW
5	6,900
6	8,280
7	9,660
8	11,040

Stroke: 1,932 mm/L<sub>1</sub> MEP: 20.0 bar



## Fuel oil

### MAN B&W S46ME-B8.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	169.5	167.0	170.0
Part-load EGB	166.5	165.5	171.5
Low-load EGB	164.5	166.5	171.5

### MAN B&W S46ME-B.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	164.5	166.5	171.5
Tier III mode	166.0	167.5	172.0

### MAN B&W S46ME-B.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	164.5	166.5	171.5
Tier III mode	167.5	167.5	172.5

Note: If EGR is the preferred Tier III technology, MAN Energy Solutions must be contacted.

# Specifications

Dimensions:	A	B	C	H1	H2	H3
mm	782	2,924	986	9,000	8,175	7,900


Cylinders:	5	6	7	8
L <sub>min</sub> mm	5,528	6,310	7,092	7,874

# Dry mass

Tier II	t	159	177	199	219
---------	---	-----	-----	-----	-----


# Tier III (added)

HPSCR	t	3	3	4	5
LPSCR	t	-	-	-	-

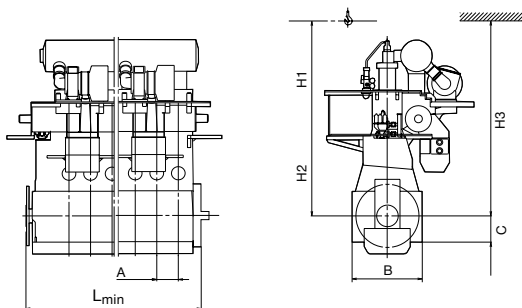

Cyl.	L <sub>1</sub> kW
5	6,950
6	8,340
7	9,730
8	11,120

Stroke: 2,250 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W G45ME-C9.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	168.5	166.0	170.0
Part-load EGB	165.5	164.5	171.5
Low-load EGB	163.5	165.5	171.5

## GI (Methane)


### MAN B&W G45ME-C9.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	137.0+4.0/168.5	135.8+3.1/168.5	142.2+2.5/175.0

Note: Also available for GIE.

Cyl.	L <sub>1</sub> kW
5	6,950
6	8,340
7	9,730
8	11,120

**Stroke: 2,250 mm/L1 MEP: 21.0 bar**


## Fuel oil

### MAN B&W G45ME-C9.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	161.5	161.0	168.0
Tier III mode	170.5	168.0	172.0

### MAN B&W G45ME-C9.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	172.0
Tier III mode	171.5	170.0	175.0

### MAN B&W G45ME-C9.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	171.5
Tier III mode	165.0	166.5	172.0


### MAN B&W G45ME-C9.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	165.5	171.5
Tier III mode	164.5	166.5	172.5

Cyl.	L <sub>1</sub> kW
5	6,950
6	8,340
7	9,730
8	11,120

Stroke: 2,250 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W G45ME-C9.5-GI-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	134.4+4.1/161.5	134.8+3.1/163.5	141.3+2.6/173.0
<b>Tier III mode</b>	142.1+4.1/170.5	140.8+3.1/170.5	144.7+2.6/177.0

### MAN B&W G45ME-C9.5-GI-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.2/163.5	138.7+3.2/168.0	144.6+2.6/177.0
<b>Tier III mode</b>	142.9+4.2/171.5	142.6+3.2/172.5	147.2+2.6/180.0

### MAN B&W G45ME-C9.5-GI-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.1/163.5	138.8+3.1/168.0	144.3+2.6/176.5
<b>Tier III mode</b>	137.4+4.1/165.0	139.6+3.1/169.0	144.7+2.6/177.0

### MAN B&W G45ME-C9.5-GI-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.1+4.1/163.5	138.8+3.1/168.0	144.3+2.6/176.5
<b>Tier III mode</b>	137.0+4.1/164.5	139.6+3.1/169.0	145.1+2.6/177.5

Note: Also available for GIE, except GIE and EGR, see pages 12-14.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	784	3,350	3,260	1,169	9,725	9,525	9,250

<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	5,638	6,464	7,290	8,116

**Dry mass**


<b>Tier II</b>	<b>t</b>	163	183	206	234
----------------	----------	-----	-----	-----	-----

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	5	6	7	8
<b>EGR</b>	<b>t</b>	5	6	7	8
<b>HPSCR</b>	<b>t</b>	3	3	4	5
<b>LPSCR</b>	<b>t</b>	-	-	-	-


**Dual fuel (added)**

<b>GI</b>	<b>t</b>	4	4	5	5
-----------	----------	---	---	---	---

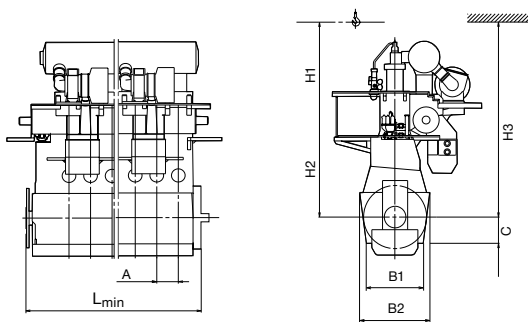

Cyl.	L <sub>1</sub> kW
5	5,675
6	6,810
7	7,945
8	9,080
9	10,215

Stroke: 1,770 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S40ME-C9.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	170.5	168.0	172.0
Part-load EGB	167.5	166.5	173.5
Low-load EGB	165.5	167.5	173.5

## GI (Methane)


### MAN B&W S40ME-C9.5-GI

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	138.7+4.1/170.5	137.5+3.1/170.5	143.8+2.6/177.0

Note: Also available for GIE.

Cyl.	L <sub>1</sub> kW
5	5,675
6	6,810
7	7,945
8	9,080
9	10,215

Stroke: 1,770 mm/L<sub>1</sub> MEP: 21.0 bar

## Fuel oil

### MAN B&W S40ME-C9.5-EcoEGR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	163.5	163.0	170.0
Tier III mode	172.5	170.0	174.0

### MAN B&W S40ME-C9.5-EGRBP

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	165.5	167.5	174.0
Tier III mode	173.5	172.0	177.0

### MAN B&W S40ME-C9.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	165.5	167.5	173.5
Tier III mode	167.0	168.5	174.0


### MAN B&W S40ME-C9.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	165.5	167.5	173.5
Tier III mode	166.5	168.5	174.5

Cyl.	L <sub>1</sub> kW
5	5,675
6	6,810
7	7,945
8	9,080
9	10,215

Stroke: 1,770 mm/L<sub>1</sub> MEP: 21.0 bar



## GI (Methane)

### MAN B&W S40ME-C9.5-GI-EcoEGR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	136.1+4.1/163.5	136.5+3.2/165.5	143.0+2.6/175.0
<b>Tier III mode</b>	143.8+4.1/172.5	142.5+3.2/172.5	146.4+2.6/179.0

### MAN B&W S40ME-C9.5-GI-EGRBP

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	137.7+4.2/165.5	140.4+3.2/170.0	146.3+2.7/179.0
<b>Tier III mode</b>	144.6+4.2/173.5	144.2+3.2/174.5	148.9+2.7/182.0

### MAN B&W S40ME-C9.5-GI-HPSCR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	137.8+4.2/165.5	140.4+3.2/170.0	145.9+2.6/178.5
<b>Tier III mode</b>	139.1+4.2/167.0	141.3+3.2/171.0	146.4+2.6/179.0

### MAN B&W S40ME-C9.5-GI-LPSCR

L <sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]			
	50%	75%	100%
<b>Tier II mode</b>	137.8+4.2/165.5	140.4+3.2/170.0	145.9+2.6/178.5
<b>Tier III mode</b>	138.6+4.2/166.5	141.3+3.2/171.0	146.8+2.6/179.5

Note: Also available for GIE, except GIE and EGR, see pages 12-14.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	700	2,650	2,610	950	7,800	7,475	7,200

<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L<sub>min</sub> mm</b>	5,000	5,700	6,400	7,100	7,800

**Dry mass**


<b>Tier II</b>	<b>t</b>	107	126	142	157	189
----------------	----------	-----	-----	-----	-----	-----

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	4	5	6	7	7
<b>EGR</b>	<b>t</b>	4	5	6	7	7
<b>HPSCR</b>	<b>t</b>	2	3	3	4	4
<b>LPSCR</b>	<b>t</b>	-	-	-	-	-


**Dual fuel (added)**

<b>GI</b>	<b>t</b>	3	3	4	4	5
-----------	----------	---	---	---	---	---

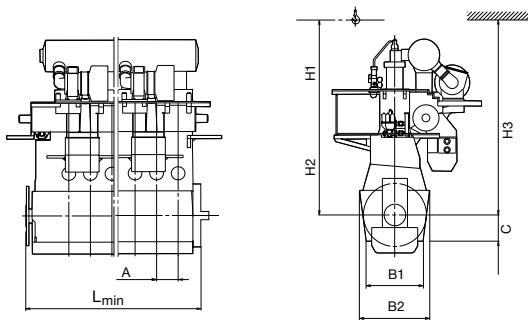

Cyl.	L <sub>1</sub> kW
5	4,350
6	5,220
7	6,090
8	6,960

Stroke: 1,550 mm/L<sub>1</sub> MEP: 21.0 bar



## Fuel oil

### MAN B&W S35ME-B9.7

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	169.5	167.0	170.0

### MAN B&W S35ME-B9.7-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	170.5	168.0	171.0
Tier III mode	172.0	169.0	171.5

### MAN B&W S35ME-B9.7-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	170.5	168.0	171.0
Tier III mode	171.0	168.5	171.5

Note: If EGR is the preferred Tier III technology, MAN Energy Solutions must be contacted.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	612	2,300	2,288	830	6,925	6,625	6,275



<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	4,430	4,990	5,602	6,214

**Dry mass**

<b>Tier II</b>	<b>t</b>	81	90	99	111
----------------	----------	----	----	----	-----


**Tier III (added)**

<b>HPSCR</b>	<b>t</b>	2	2	3	3
<b>LPSCR</b>	<b>t</b>	-	-	-	-

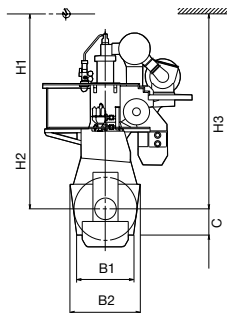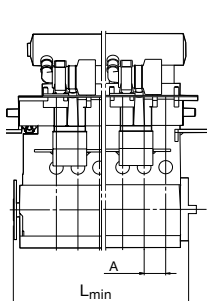

Cyl.	L <sub>1</sub> kW
5	4,350
6	5,220
7	6,090
8	6,960

Stroke: 1,550 mm/L<sub>1</sub> MEP: 21.0 bar




## GI (Methane)

### MAN B&W S35ME-CR9.7-GI

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	132.8+8.0/167.5	132.4+6.1/167.5	139.2+5.0/174.0

Cyl.	L <sub>1</sub> kW
5	4,350
6	5,220
7	6,090
8	6,960

**Stroke: 1,550 mm/L<sub>1</sub> MEP: 21.0 bar**


## GI (Methane)

### MAN B&W S35ME-CR9.7-GI-EcoEGR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	130.1+8.1/160.5	131.4+6.2/162.5	138.2+5.1/172.0
<b>Tier III mode</b>	137.8+8.1/169.5	137.4+6.2/169.5	141.7+5.1/176.0

### MAN B&W S35ME-CR9.7-GI-EGRBP

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.7+8.3/162.5	135.2+6.3/167.0	141.6+5.2/176.0
<b>Tier III mode</b>	138.5+8.3/170.5	139.0+6.3/171.5	144.1+5.2/179.0

### MAN B&W S35ME-CR9.7-GI-HPSCR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.8+8.2/162.5	135.3+6.2/167.0	141.2+5.1/175.5
<b>Tier III mode</b>	133.1+8.2/164.0	136.1+6.2/168.0	141.7+5.1/176.0

### MAN B&W S35ME-CR9.7-GI-LPSCR

#### L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	131.8+8.2/162.5	135.3+6.2/167.0	141.2+5.2/175.5
<b>Tier III mode</b>	132.7+8.2/163.5	136.1+6.2/168.0	142.1+5.2/176.5

Note: Also available for GIE, except GIE and EGR, see pages 12-14.

### Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	612	2,300	2,288	830	6,925	6,625	6,275



Cylinders:	5	6	7	8
L <sub>min</sub> mm	4,430	4,990	5,602	6,214

### Dry mass

Tier II	t	81	90	99	111
---------	---	----	----	----	-----

### Tier III (added)

HPSCR	t	2	2	3	3
LPSCR	t	-	-	-	-

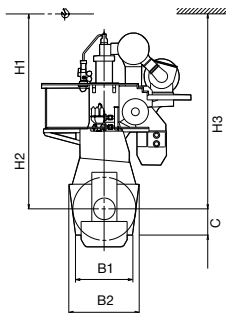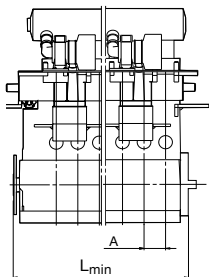



# Technical competence

**MAN PrimeServ**

## Service with passion

---

We at MAN PrimeServ understand that performance and reliability are paramount to your business. You need technical competence that drives your success. MAN PrimeServ's many decades of hands-on experience and its diverse portfolio provide this. With MAN PrimeServ as your partner you benefit from state-of-the-art technical and digital solutions that fit your individual situation. What's more, these benefits are brought directly to your business through a global network of local experts. Whatever the time and wherever you are in the world, you can count on MAN PrimeServ as a strong service solution provider for your needs.


To find out more about our technical competence, please visit:

[www.man-es.com](http://www.man-es.com)



Cyl.	L <sub>1</sub> kW
5	3,200
6	3,840
7	4,480
8	5,120

Stroke: 1,328 mm/L<sub>1</sub> MEP: 21.0 bar



## Tier II Fuel oil

### MAN B&W S30ME-B9.5

#### L<sub>1</sub> SFOC [g/kWh]

Opt. load range	50%	75%	100%
High-load	175.5	173.0	176.0

## Tier III fuel oil

### MAN B&W S30ME-B9.5-HPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	175.5	173.0	176.0
Tier III mode	177.0	174.0	176.5

### MAN B&W S30ME-B9.5-LPSCR

#### L<sub>1</sub> SFOC [g/kWh]

	50%	75%	100%
Tier II mode	175.5	173.0	176.0
Tier III mode	176.0	173.5	176.5

Note: If EGR is the preferred Tier III technology, MAN Energy Solutions must be contacted.

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	538	1,980	2,020	712	6,025	5,950	5,625


<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	4,087	4,625	5,163	5,701

**Dry mass**

<b>Tier II</b>	<b>t</b>	61	69	77	86
----------------	----------	----	----	----	----

**Tier III (added)**

<b>HPSCR</b>	<b>t</b>	1	2	2	2
<b>LPSCR</b>	<b>t</b>	-	-	-	-

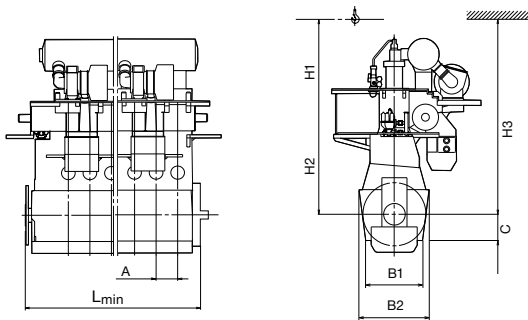




# MAN B&W two-stroke propulsion engines



Alternative fuels  
Tier II and Tier III

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L<sub>1</sub> MEP: 21.0 bar



## GIE (Ethane)

### MAN B&W G60ME-C10.5-GIE

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	144.2+4.1/161.5	146.1+3.1/163.0	150.5+2.6/170.0

## LGIP (LPG)


### MAN B&W G60ME-C10.5-LGIP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	142.6+7.9/161.5	143.5+6.0/160.5	148.6+5.0/165.0
Part-load EPT	140.6+8.0/159.5	142.1+6.1/159.0	150.8+5.0/167.5
Low-load EPT	138.8+8.0/157.5	143.0+6.1/160.0	150.8+5.0/167.5

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L1 MEP: 21.0 bar



## GIE (Ethane)

## MAN B&amp;W G60ME-C10.5-GIE-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
Tier II mode	140.6+4.1/157.5	145.6+3.2/162.5	152.7+2.6/172.5
Tier III mode	141.9+4.1/159.0	146.5+3.2/163.5	153.2+2.6/173.0


## MAN B&amp;W G60ME-C10.5-GIE-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
Tier II mode	140.6+4.1/157.5	145.6+3.2/162.5	152.7+2.6/172.5
Tier III mode	141.5+4.1/158.5	146.5+3.2/163.5	153.6+2.6/173.5

Cyl.	L <sub>1</sub> kW
5	14,200
6	17,040
7	19,880
8	22,720

Stroke: 2,790 mm/L<sub>1</sub> MEP: 21.0 bar



## LGIP (LPG)

### MAN B&W G60ME-C10.5-LGIP-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	136.0+8.0/154.5	138.8+6.1/155.5	146.7+5.0/163.0
<b>Tier III mode</b>	144.4+8.0/163.5	145.3+6.1/162.5	150.4+5.0/167.0

### MAN B&W G60ME-C10.5-LGIP-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	138.7+8.1/157.5	142.9+6.2/160.0	151.2+5.1/168.0
<b>Tier III mode</b>	145.2+8.1/164.5	147.1+6.2/164.5	153.1+5.1/170.0

### MAN B&W G60ME-C10.5-LGIP-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	138.7+8.1/157.5	143.0+6.1/160.0	150.8+5.0/167.5
<b>Tier III mode</b>	140.1+8.1/159.0	143.9+6.1/161.0	151.3+5.0/168.0

### MAN B&W G60ME-C10.5-LGIP-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	138.7+8.0/157.5	143.0+6.1/160.0	150.8+5.1/167.5
<b>Tier III mode</b>	139.7+8.0/158.5	143.9+6.1/161.0	151.7+5.1/168.5

**Specifications**

<b>Dimensions:</b>	<b>A</b>	<b>B1</b>	<b>B2</b>	<b>C</b>	<b>H1</b>	<b>H2</b>	<b>H3</b>
<b>mm</b>	1,080	4,090	4,220	1,500	12,175	11,400	11,075

<b>Cylinders:</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>L<sub>min</sub> mm</b>	7,390	8,470	9,550	10,630

**Dry mass**


<b>Tier II</b>	<b>t</b>	395	439	491	543
----------------	----------	-----	-----	-----	-----

**Tier III (added)**

<b>EcoEGR</b>	<b>t</b>	14	14	15	16
<b>EGR</b>	<b>t</b>	14	14	15	16
<b>HPSCR</b>	<b>t</b>	3	4	5	5
<b>LPSCR</b>	<b>t</b>	-	-	-	-


**Dual fuel (added)**

<b>GIE</b>	<b>t</b>	5	6	7	7
<b>LGIP</b>	<b>t</b>	5	6	7	7

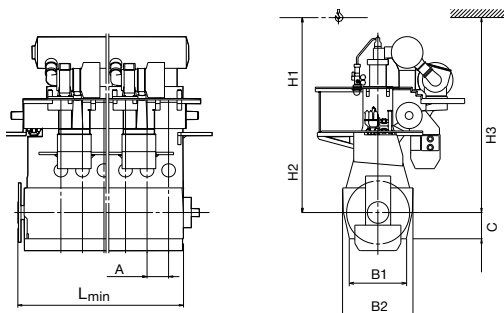

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

Stroke: 2,400 mm/L<sub>1</sub> MEP: 21.0 bar



## GIE (Ethane)

### MAN B&W S60ME-C10.5-GIE

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	146.9+4.1/167.5	147.4+3.1/169.5	151.4+2.6/176.0

## LGIP (LPG)


### MAN B&W S60ME-C10.5-LGIP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	145.4+7.9/164.5	144.9+6.0/162.0	149.5+5.0/166.0
Part-load EGB	142.5+8.0/161.5	143.4+6.1/160.5	150.8+5.0/167.5
Low-load EGB	140.7+8.0/159.5	144.4+6.1/161.5	150.8+5.0/167.5

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

Stroke: 2,400 mm/L1 MEP: 21.0 bar



## GIE (Ethane)

## MAN B&amp;W S60ME-C10.5-GIE-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	142.4+4.1/162.5	147.0+3.2/169.0	152.7+2.6/177.5
<b>Tier III mode</b>	143.7+4.1/164.0	147.8+3.2/170.0	153.2+2.6/178.0


## MAN B&amp;W S60ME-C10.5-GIE-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	142.4+4.1/162.5	147.0+3.2/169.0	152.7+2.6/177.5
<b>Tier III mode</b>	143.3+4.1/163.5	147.8+3.2/170.0	153.6+2.6/178.5

Cyl.	L <sub>1</sub> kW
5	12,450
6	14,940
7	17,430
8	19,920

Stroke: 2,400 mm/L<sub>1</sub> MEP: 21.0 bar



## LGIP (LPG)

### MAN B&W S60ME-C10.5-LGIP-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	138.8+8.0/157.5	140.1+6.1/157.0	147.6+5.0/164.0
<b>Tier III mode</b>	147.1+8.0/166.5	146.6+6.1/164.0	151.3+5.0/168.0

### MAN B&W S60ME-C10.5-LGIP-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	140.5+8.1/159.5	144.3+6.2/161.5	151.2+5.1/168.0
<b>Tier III mode</b>	147.9+8.1/167.5	148.4 (6.2)/166.0	154.0+5.1/171.0

### MAN B&W S60ME-C10.5-LGIP-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	140.6+8.0/159.5	144.3+6.1/161.5	150.8+5.0/167.5
<b>Tier III mode</b>	142.0+8.0/161.0	145.3+6.1/162.5	151.3+5.0/168.0

### MAN B&W S60ME-C9.10-LGIP-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	140.6+8.0/159.5	144.3+6.1/161.5	150.8+5.1/167.5
<b>Tier III mode</b>	141.5+8.0/160.5	145.3+6.1/162.5	151.7+5.1/168.5

## Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	940	3,440	3,520	1,300	10,500	9,725	10,125

Cylinders:	5	6	7	8
L <sub>min</sub> mm	6,440	7,380	8,320	9,260

## Dry mass


Tier II	t	293	332	369	425
---------	---	-----	-----	-----	-----

## Tier III (added)

EcoEGR	t	14	14	15	16
EGR	t	14	14	15	16
HPSCR	t	3	4	5	5
LPSCR	t	-	-	-	-


## Dual fuel (added)

GIE	t	5	5	6	7
LGIP	t	5	5	6	7

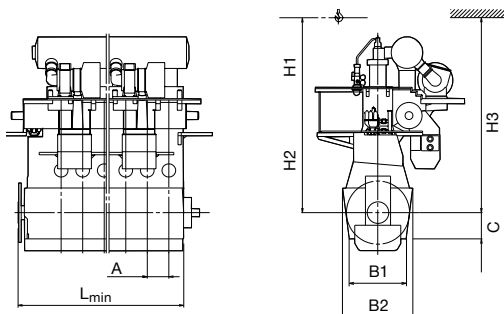

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L<sub>1</sub> MEP: 21.0 bar



## GIE (Ethane)

### MAN B&W G50ME-C9.6-GIE

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	146.0+4.1/166.5	147.9+3.1/170.0	152.3+2.6/177.0

## LGIM (Methanol)


### MAN B&W G50ME-C9.6-LGIM

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

Opt. load range	50%	75%	100%
High-load	322.4+13.3/163.5	327.2+10.1/162.5	340.4+8.4/167.0
Part-load EGB	317.7+13.5/161.5	323.7+10.3/161.0	345.5+8.5/169.5
Low-load EGB	313.4+13.5/159.5	325.8+10.3/162.0	345.5+8.5/169.5

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L1 MEP: 21.0 bar



## GIE (Ethane)

## MAN B&amp;W G50ME-C9.6-GIE-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
Tier II mode	142.3+4.2/162.5	147.4+3.2/169.5	154.5+2.6/179.5
Tier III mode	143.7+4.2/164.0	148.3+3.2/170.5	155.0+2.6/180.0


## MAN B&amp;W G50ME-C9.6-GIE-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
Tier II mode	142.3+4.2/162.5	147.4+3.2/169.5	154.5+2.6/179.5
Tier III mode	143.2+4.2/163.5	148.3+3.2/170.5	155.4+2.6/180.5

Cyl.	L <sub>1</sub> kW
5	8,600
6	10,320
7	12,040
8	13,760
9	15,480

Stroke: 2,500 mm/L<sub>1</sub> MEP: 21.0 bar



## LGIM (Methanol)

### MAN B&W G50ME-C9.6-LGIM-EcoEGR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	307.0+13.4/156.5	316.0+10.2/157.5	335.9+8.5/165.0
<b>Tier III mode</b>	326.3+13.4/165.5	331.0+10.2/164.5	344.5+8.5/169.0

### MAN B&W G50ME-C9.6-LGIM-EGRBP

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	312.9+13.7/159.5	325.5+10.4/162.0	346.3+8.6/170.0
<b>Tier III mode</b>	328.0+13.7/166.5	335.2+10.4/166.5	350.6+8.6/172.0

### MAN B&W G50ME-C9.6-LGIM-HPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	313.1+13.6/159.5	325.7+10.3/162.0	345.5+8.5/169.5
<b>Tier III mode</b>	316.3+13.6/161.0	327.8+10.3/163.0	346.5+8.5/170.0

### MAN B&W G50ME-C9.6-LGIM-LPSCR

L<sub>1</sub> dual fuel mode (SGC+SPOC)/fuel oil mode (SFOC) [g/kWh]

	50%	75%	100%
<b>Tier II mode</b>	313.2+13.5/159.5	325.7+10.3/162.0	345.4+8.5/169.5
<b>Tier III mode</b>	315.3+13.5/160.5	327.8+10.3/163.0	347.6+8.5/170.5

# Specifications

Dimensions:	A	B1	B2	C	H1	H2	H3
mm	872	3,776	3,652	1,205	10,775	10,075	9,775

Cylinders:	5	6	7	8	9
L <sub>min</sub> mm	6,260	7,132	8,004	8,876	9,748

# Dry mass



Tier II	t	210	245	275	310	345
---------	---	-----	-----	-----	-----	-----

# Tier III (added)

EcoEGR	t	6	8	9	10	12
EGR	t	6	8	9	10	12
HPSCR	t	4	4	5	6	6
LPSCR	t	-	-	-	-	-

# Dual fuel (added)

GIE	t	5	5	6	6	7
LGIM	t	7	7	8	9	10

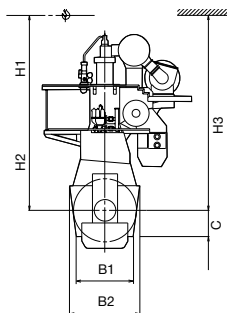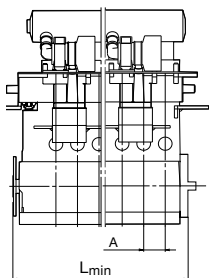



# MAN B&W two-stroke propulsion systems



## Propeller Programme – FPP and CPP

### The MAN Alpha FPP portfolio covers:

- power range of 4-40 MW per shaft
- blade configurations for 3, 4, 5 and 6-bladed propellers
- propellers with integrated shaft line and stern tube solutions
- wide range of stern tube lube and sealing systems
  - oil, water, biodegradable oils.



6.9-metre MAN Alpha Kappel propeller  
for a 105,000 dwt crude oil carrier ►

### The MAN Alpha FPPs are characterised by the following benefits:



- High-efficient, hydrodynamically optimised blade profiles
  - Kappel designs available
- High reliability: robust approach with ample mechanical design margins
- High-efficient aft-ship integration with rudder, rudder bulb, ducts, etc.
- Layouts for complete two-stroke propulsion systems, e.g. with PTO solutions
- Plant calculations with upfront consideration to torsional vibration calculation (TVC), alignment and control systems.

### MAN Alpha controllable pitch propeller

- Standard Mk 5 versions are 4-bladed – 3 and 5-bladed propellers are available upon request
- The figures stated after the VBS indicate the propeller hub diameter
- Standard blade/hub materials are Ni-Al-bronze; stainless steel is optional
- Propellers are available up to the highest ice classes; however the standard programme is based on 'no ice'.

# Standard programme

Propeller diameter (mm)

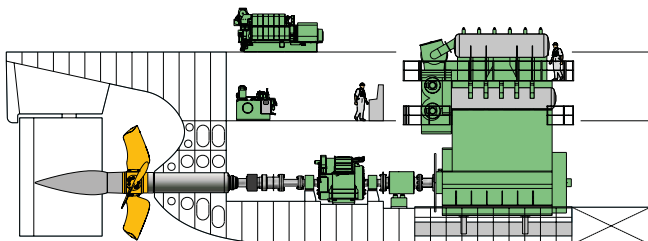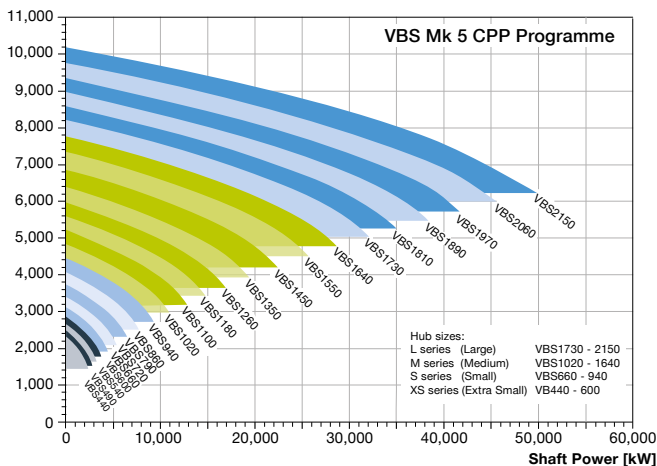

Two-stroke propulsion system installation – complete powertrain with propeller and aft ship equipment

# MAN B&W standard package examples


Cyl.	kW	Prop. speed r/min	D <sup>1)</sup> mm	Hub VBS mm	Q mm	R mm	Wmin mm	Prop. mass t <sup>2)</sup>
<b>G70ME-C9.5/-GI</b>								
<b>5</b>	18,200	83	8,100	1,890	1,436	1,496	3,700	90.0
<b>6</b>	21,840	83	8,450	2,060	1,565	1,593	3,700	93.5
<b>7</b>	25,480	83	8,750	2,150	1,634	1,645	3,700	102.0
<b>8</b>	29,120	83						<sup>3)</sup>

<b>S65ME-C8.5/-GI</b>								
<b>5</b>	14,350	95	7,150	1,730	1,315	1,339	3,400	66.1
<b>6</b>	17,220	95	7,450	1,810	1,375	1,385	3,400	73.0
<b>7</b>	20,090	95	7,700	1,890	1,436	1,466	3,400	81.2
<b>8</b>	22,960	95	7,900	1,970	1,497	1,512	3,400	89.3

<sup>1)</sup> For optimal Kappel blades, the propeller diameter is reduced by an average of 3-10% compared to the listed standard diameters

<sup>2)</sup> The masses are stated for 4,000 mm stern tube and 8,000 mm propeller shaft

<sup>3)</sup> Available on request

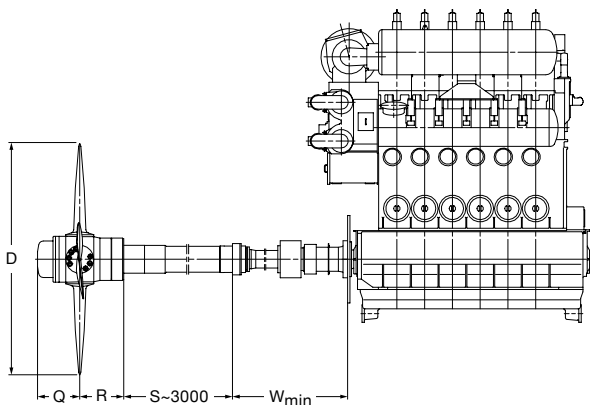

## MAN B&W standard package examples

Cyl.	kW	Prop. speed r/min	D <sup>1)</sup> mm	Hub VBS mm	Q mm	R mm	Wmin mm	Prop. mass t <sup>2)</sup>
<b>G60ME-C9.5/-GI</b>								
5	13,400	97	6,950	1,640	1,246	1,287	3,300	60.0
6	16,080	97	7,250	1,730	1,315	1,339	3,300	64.2
7	18,760	97	7,450	1,810	1,375	1,420	3,300	70.3
8	21,440	97	7,700	1,890	1,436	1,496	3,100	74.6

### G50ME-C9.6/-GI

5	8,600	100	6,150	1,450	1,102	1,174	3,100	42.7
6	10,320	100	6,450	1,550	1,178	1,231	3,100	45.1
7	12,040	100	6,650	1,550	1,178	1,231	3,100	48.1
8	13,760	100	6,850	1,640	1,246	1,287	2,900	50.9
9	15,480	100	7,050	1,730	1,315	1,339	3,100	58.1

### S50ME-C9.7/-GI

5	8,900	117	5,650	1,350	1,037	1,096		
6	10,680	117	5,850	1,450	1,114	1,148		
7	12,460	117	6,050	1,450	1,114	1,148		
8	14,240	117	6,200	1,550	1,175	1,256		
9	16,020	117	6,350	1,640	1,260	1,288		

### S50ME-C8.5/-GI <sup>3)</sup>

5	8,300	127	5,400	1,350	1,030	1,082	2,690	31.7
6	9,960	127	5,600	1,350	1,100	1,145	2,690	35.4
7	11,620	127	5,800	1,450	1,175	1,233	2,690	39.9
8	13,280	127	5,950	1,450	1,175	1,248	2,690	42.0

<sup>1)</sup> For optimal Kappel blades, the propeller diameter is reduced by an average of 3-10% compared to the listed standard diameters

<sup>2)</sup> The masses are stated for 4,000 mm stern tube and 8,000 mm propeller shaft

<sup>3)</sup> Data for 9 cylinder is available on request

# MAN B&W standard package examples

Cyl.	kW	Prop. speed r/min	D <sup>1)</sup> mm	Hub VBS mm	Q mm	R mm	Wmin mm	Prop. mass t <sup>2)</sup>
<b>S46ME-B8.5/-GI</b>								
5	6,900	129	5,200	1,260	975	1,035	2,650	27.4
6	8,280	129	5,400	1,350	1,030	1,082	2,650	29.9
7	9,660	129	5,550	1,350	1,100	1,145	2,650	34.0
8	11,040	129	5,700	1,450	1,175	1,233	2,650	38.9

<b>G45ME-C9.5/-GI</b>								
5	6,950	111	5,650	1,350	1,026	1,109	2,700	28.8
6	8,340	111	5,900	1,350	1,026	1,109	2,700	30.6
7	9,730	111	6,100	1,450	1,102	1,197	2,700	35.1
8	11,120	111	6,250	1,550	1,178	1,236	2,700	37.6

<b>G40ME-C9.5/-GI</b>								
5	5,500	125	5,000	1,180	897	1,054	2,520	24.1
6	6,600	125	5,250	1,260	975	1,070	2,600	28.0
7	7,700	125	5,400	1,260	975	1,170	2,520	29.7
8	8,800	125	5,550	1,350	1,026	1,138	2,520	32.9

<b>S40ME-C9.5/-GI</b>								
5	5,675	146	4,650	1,100	885	972	2,500	22.1
6	6,810	146	4,800	1,180	957	1,025	2,500	24.6
7	7,945	146	4,950	1,180	957	1,025	2,500	26.0
8	9,080	146	5,050	1,260	975	1,081	2,500	29.8
9	10,215	146	5,550	1,350	1,026	1,140	2,700	34.4

<b>S35ME-B9.7/-GI</b>								
5	4,350	167	4,050	940	821	920	2,500	16.3
6	5,220	167	4,200	1,020	821	920	2,500	16.9
7	6,090	167	4,350	1,100	885	946	2,500	19.4
8	6,960	167	4,450	1,100	885	946	2,500	20.4

## MAN B&W standard package examples


Cyl.	kW	Prop. speed r/min	D <sup>1)</sup> mm	Hub VBS mm	Q mm	R mm	Wmin mm	Prop. mass t <sup>2)</sup>
<b>S30ME-B9.5/-G1</b>								
<b>5</b>	3,200	195	3,500	860	653	750	2,350	10.5
<b>6</b>	3,840	195	3,600	860	653	750	2,350	11.0
<b>7</b>	4,480	195	3,700	940	714	886	2,350	12.3
<b>8</b>	5,120	195	3,800	940	714	886	2,350	13.0

<sup>1)</sup> For optimal Kappel blades, the propeller diameter is reduced by an average of 3-10% compared to the listed standard diameters

<sup>2)</sup> The masses are stated for 3,000 mm stern tube and 8,000 mm propeller shaft

# Alphatronic 3000 Propulsion control system

A high number of various FPP and CPP propulsion package applications are controlled by the Alphatronic 3000 system – customised for combinations of MAN low and medium speed engines in a wide range of diesel-mechanical, hybrid or diesel-electric propulsion setups.

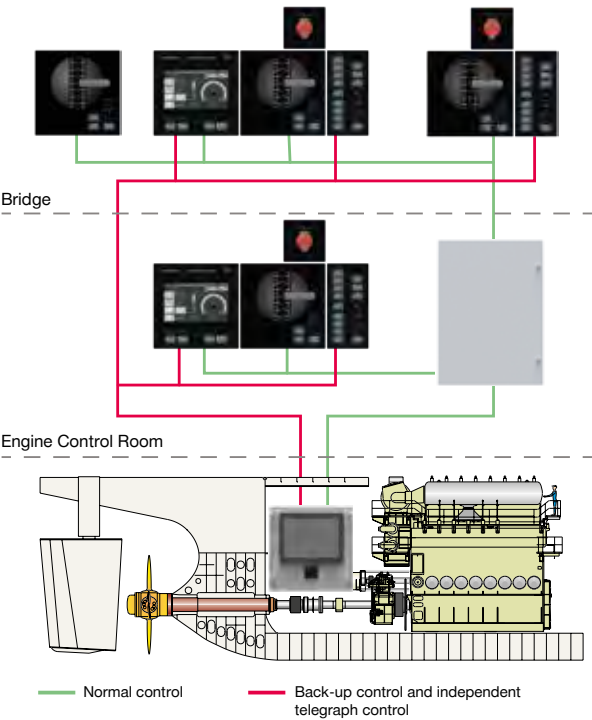

Simple system architecture for a straightforward two-stroke CPP propulsion plant





**MAN  
four-stroke  
propulsion  
engines**



## **MAN four-stroke propulsion engines – all emission requirements**

Besides focus on power density and fuel economy, MAN Energy Solutions is committed to a steady reduction of the environmental impact of our engines.

### **IMO Tier II**

Applying well-proven methods to achieve a cleaner and more efficient combustion process, MAN Energy Solutions has significantly decreased NO<sub>x</sub> emissions. Our four-stroke propulsion engines are IMO Tier II compliant with internal engine measures alone.


### **IMO Tier III**

For operation in emission control areas (ECA), MAN Energy Solutions has developed a comprehensive range of selective catalytic reduction (SCR) systems that tremendously reduce NO<sub>x</sub> levels surpassing IMO Tier III requirements.

MAN Energy Solutions is the first manufacturer to successfully produce and offer IMO Tier III compliant four-stroke marine engines based on a fully modular SCR kit covering our entire four-stroke engine portfolio. In 2014 MAN Energy Solutions was awarded the first IMO Tier III EIAPP certificate together with the classification society DNV-GL.

MAN Energy Solutions' standard SCR system is available in fourteen different sizes covering our entire portfolio of four-stroke engines. Customised SCR systems are offered on demand.

MAN has developed a complete range of SCR systems that work perfectly with our engines for maximum system efficiency. The intelligent exhaust gas temperature control allows significant savings in fuel consumptions as compared to third-party supplier systems. MAN SCR systems work with MGO, MDO and HFO with up to 3.5% sulphur.

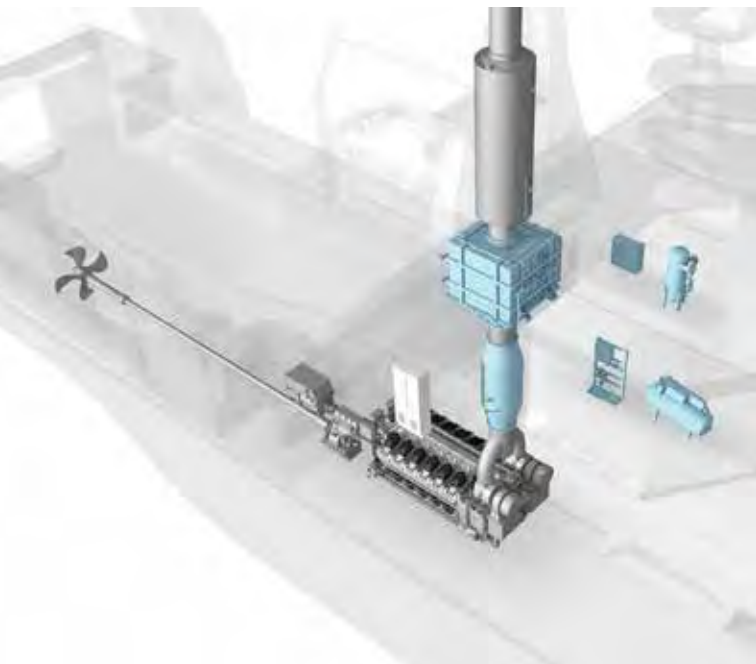

MAN SCR system

Our modular system comes in 14 different sizes to match all power demands. Some notable benefits of standardisation are significant cost reduction and simplification of installation.



The modular SCR component kit

## Urea consumption

The urea consumption depends on engine type, selected performance characteristics (engine map), in case of an engine with ECOMAP capability, operating profile, fuel type, ambient conditions, type of reduction agent, etc.

For more detailed information on the expected level of urea consumption, please contact MAN Energy Solutions with your project specific request.

## Conventional injection engines

Our well-established engine types are used in a vast array of applications all over the world. Based on long-term experience of historical proportions, our engines are in continuous development to increase power, reduce emissions, increase reliability, reduce fuel oil consumption, and increase longevity. Our engines are the prime movers of choice in the maritime sector.

## **Common rail (CR) engines**

The flexibility of our CR technology enables a substantial improvement of the combustion process that improves the fuel economy and reduces emission levels. It is particularly advantageous in the low-load and mid-load ranges where our unique ECOMAP system (optional) applies different engine maps to reduce fuel consumption while observing IMO emission limits. Another feature is our patented Boost Injection. Our engine control system senses a load increase at a very early stage and tremendously improves the load response with the activation of boost injection by the common rail control. In addition, exhaust gas opacity is markedly reduced, far below the visibility limit. Our CR engines run efficiently on liquid fuels complying with ISO 8217-2017 DMA, DMZ, and DMB, and on residual fuels (HFO) up to 700 cSt (in compliance with ISO-F-RMK 700).

## **Diesel oil (D) engines**

The V28/33D STC features very favourable ratios of power-to-weight and power-to-installation space. The combination of low fuel consumption, low emissions and reduced life cycle costs makes this engine the ideal solution for propulsion in high speed ferries, naval and offshore patrol vessels. The V28/33D STC engine operates on distillates according to ISO 8217 DMA or equivalent fuel types.

## **Sequential turbocharging (STC)**

The MAN Energy Solutions sequential turbocharging system operates with two high-efficiency turbochargers. Depending on the amount of charge air required, the second turbocharger is switched on or off. In this way, the engine is operated at its optimum operating point over the whole applicable load range.

The result is an extended operating envelope at low engine speeds, which gives a power reserve for ship acceleration, ship turning, sprints or towing. Furthermore, the STC system is characterised by a low thermal signature, decreased smoke emission, low vibrations and continuous low-load operation with reduced fuel consumption, which makes it the ideal solution for propulsion in naval applications and offshore patrol vessels.

## Dual fuel (DF) engines

Dual fuel engines from MAN Energy Solutions run efficiently on liquid fuels or natural gas with very low emissions that are compliant with IMO limits. On gaseous fuel, the engines comply with IMO Tier III without the need for additional exhaust gas aftertreatment, and on liquid fuel they either fulfill IMO Tier II, or IMO Tier III together with an SCR system. The possibility to switch over seamlessly from gas to HFO or diesel operation and vice versa provides full flexibility in multiple applications.


All dual fuel engines can run on natural gas with a methane number higher than 80 without adjustments. For lower methane numbers, MAN Energy Solutions can deliver well-adapted solutions. The optimised combustion chamber ensures very low fuel consumption in both operational modes.

## MAN Cryo fuel gas supply systems

MAN Cryo fuel gas systems are the world's leading solution for safely storing energy on board gas fuelled ships and reliably providing it to the engines.

After pioneering in the market for LNG-fuelled ships in 1999, MAN Cryo fuel gas systems have since then been installed on a major part of today's gas fuelled ship fleet, either standardised or tailor-made. The references range from passenger ferries to offshore platform supply vessels, tug boats, bunker barges and even ice breakers.

MAN Energy Solutions provides one-stop solutions with complete packages consisting of main engines, auxiliary gensets, propulsion train, LNG fuel tank, coldbox, control system and bunkering station.

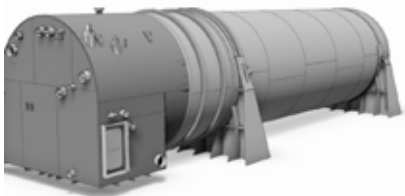

Vacuum-insulated type-C LNG tank including cold box



Dual fuel propulsion package including  
fuel gas storage and supply system

In order to deliver cost-optimised systems with shortest delivery times, MAN Energy Solutions offers a broad range of standard cryo packages in all required sizes. Beyond this standard scope and for larger tank sizes, customised solutions are engineered in the most efficient way in order to meet all our customers' demands.

### MAN Cryo LNG standard packages (example sizes)

Geometrical volume m <sup>3</sup>	Net filling volume (95%) m <sup>3</sup>	Outer diameter m	Tank length (without TCS)
76	73	3.6	10.9
100	95	3.6	13.9
124	118	3.6	16.9
142	135	4.2	14.0
175	167	4.2	17.0
209	199	4.2	20.0
249	237	5.3	16.4
300	285	5.3	19.4
352	335	5.3	22.4
385	366	6.0	19.8
450	428	6.0	22.5
516	491	6.0	25.8
600	570	6.9	23.2

## Engine power

Engine brake power is stated in kW.

Ratings are given according to ISO 3046-1:2002.


According to ISO 15550:2002, the power figures in the tables are valid within a range of  $\pm 3\%$  up to tropical conditions at sea level, i.e.:

- compressor inlet temperature 45 °C
- compressor inlet pressure 1,000 mbar
- sea water temperature 32 °C

Usually for four-stroke propulsion engines, the power is defined according to the ICN<sup>1</sup> (MCR) definition (ISO 3046-1:2002:ISO standard power).

For the load profile type Navy, of the engine types V28/33D STC, the rated power of the engine is stated according to the ICN<sup>1</sup> power definition (ISO 3046:2002:ISO standard fuel stop power).

### Load profile type: Navy (ICFN)

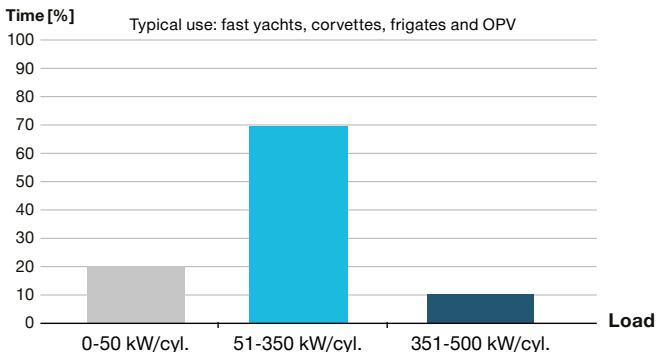

<sup>1</sup> I = ISO power

C = continuous power output

F = fuel stop power

N = net

## **Specific fuel oil consumption (SFOC) and heat rate**

The stated consumption figures refer to the following reference conditions according to ISO 3046-1:

- ambient air pressure: 1,000 mbar
- ambient air temperature: 25 °C (77 °F)
- charge air temperature: according to engine type, corresponding to 25 °C cooling water temperature before CAC

The figures are given with a tolerance of +5% and without engine driven pumps. Attached pumps and engines running in suction dredger operation will require additional fuel.

In accordance with the NO<sub>x</sub> Technical Code 2008 of the International Maritime Organization, DM-grade fuel oil is used as reference fuel oil for engine tests and, thus, also forms the basis for the SFOC figures stated for engines in liquid fuel operation.

Unless otherwise specifically stated, SFOC figures are based on a lower calorific value of the fuel oil of 42,700 kJ/kg and, in addition for engines with common rail injection (CR-engines), on DMA-grade fuel oil (ISO 8217-2017). For engines with conventional fuel injection, SFOC figures are based on DMB-grade fuel oil (ISO 8217-2017). For further details, please refer to our engine specific project guides available from MAN Energy Solutions.

## **Specific lube oil consumption (SLOC)**

The specific lube oil consumption is specified at MCR (maximum continuous rating) with a tolerance of 20%.

## **Blocking of output**

Blocking of output is made for engines driving a propeller at 100% of the rated output. For engines powering an alternator, blocking of output is made at 110%. However, operation above 100% load is only recommended for a short period of time for recovery and prevention of a frequency drop.

## Weights and dimensions

For marine main engines, the weights stated refer to engines without a flywheel.

All weights given are without lube oil and cooling water.


For auxiliary engines (GenSets), weights refer to the unit (including alternator). The weight of the GenSet may vary depending on the alternator make.

The length of the GenSet unit depends on the alternator make. For a twin engine installation, the centreline distance is stated for each engine type.


The centreline distance for twin engine installation is given as a minimum value. Specific requirements to the passageway (e.g. of classification societies or flag state authority), seating type or a gallery can lead to higher values.


## Engine type designation

12V28/33D STC

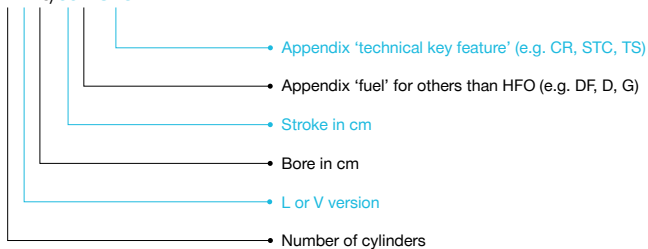

# MAN four-stroke propulsion engines programme

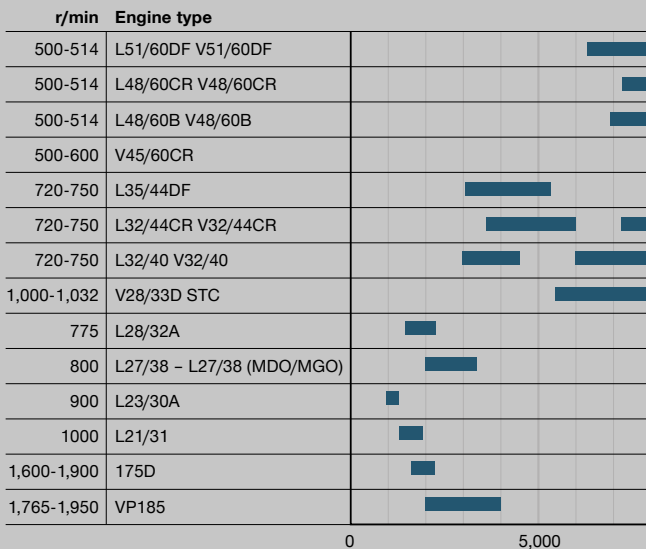

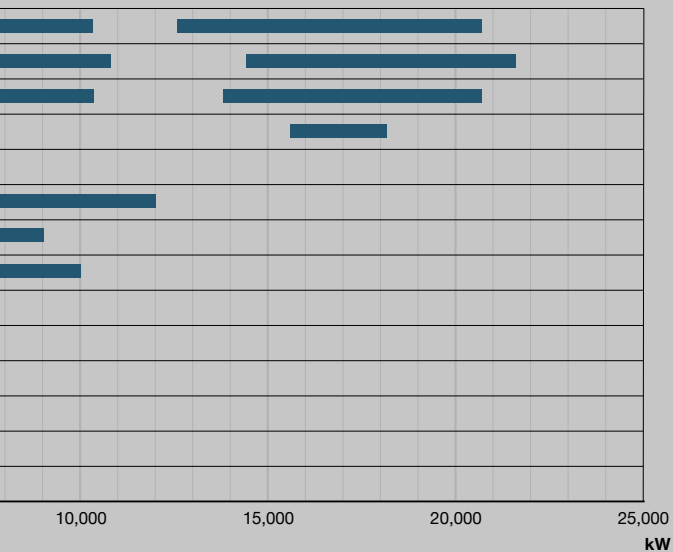

# MAN V51/60DF

High efficient variant

**Tier II** **Tier III**

Tier III in gas mode

**Bore:** 510 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	20.0	20.6
	<b>kW</b>		<b>kW</b>
<b>12V51/60DF</b>		12,600	12,600
<b>14V51/60DF</b>		14,700	14,700
<b>16V51/60DF</b>		16,800	16,800
<b>18V51/60DF</b>		18,900	18,900

LHV of fuel gas  $\geq 28,000$  kJ/Nm<sup>3</sup>

(Nm<sup>3</sup> corresponds to one cubic meter of gas at 0 °C and 1.013 bar)

## Specific fuel oil consumption (SFOC) and Heat rate to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>Specific fuel oil consumption<sup>1)</sup></b>	179.5 g/kWh	177.0 g/kWh
<b>Heat rate<sup>2)</sup></b>	7,190 kJ/kWh	7,200 kJ/kWh

Specific lube oil consumption<sup>3)</sup>: 0.38 g/kWh for nominal output 1,050 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C

<sup>1)</sup> Liquid fuel operation


<sup>2)</sup> Gas operation (including pilot fuel), gas fuel: methane no.  $\geq 80$

<sup>3)</sup> Related to 100% actual engine load

## Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>
<b>L</b>	<b>mm</b>	10,254	11,254	12,254	13,644
<b>L<sub>1</sub></b>	<b>mm</b>	9,088	10,088	11,088	12,088
<b>Dry mass</b>	<b>t</b>	187	213	240	265

Minimum centreline distance for twin engine installation: 4,800 mm

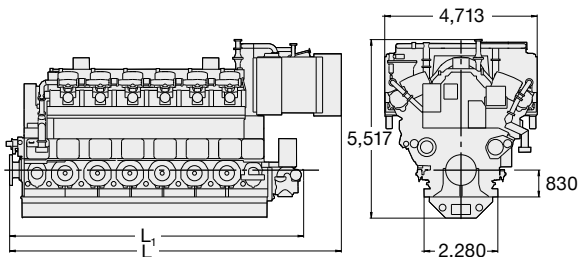

Tier III in gas mode

**Bore:** 510 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	20.0	20.6
		<b>kW</b>	<b>kW</b>
<b>6L51/60DF</b>		6,300	6,300
<b>7L51/60DF</b>		7,350	7,350
<b>8L51/60DF</b>		8,400	8,400
<b>9L51/60DF</b>		9,450	9,450

LHV of fuel gas  $\geq 28,000$  kJ/Nm<sup>3</sup>

(Nm<sup>3</sup> corresponds to one cubic meter of gas at 0 °C and 1.013 bar)

### Specific fuel oil consumption (SFOC) and Heat rate to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>Specific fuel oil consumption<sup>1)</sup></b>	179.5 g/kWh	177.0 g/kWh
<b>Heat rate<sup>2)</sup></b>	7,190 kJ/kWh	7,200 kJ/kWh

Specific lube oil consumption<sup>3)</sup>: 0.38 g/kWh for nominal output 1,050 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C

<sup>1)</sup> Liquid fuel operation


<sup>2)</sup> Gas operation (including pilot fuel), gas fuel: methane no.  $\geq 80$

<sup>3)</sup> Related to 100% actual engine load

### Dimensions

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L</b>	<b>mm</b>	8,494	9,314	10,134	11,160
<b>L<sub>1</sub></b>	<b>mm</b>	7,455	8,275	9,095	9,915
<b>W</b>	<b>mm</b>	3,165	3,165	3,165	3,283
<b>Dry mass</b>	<b>t</b>	106	119	135	148

Minimum centreline distance for twin engine installation: 3,200 mm

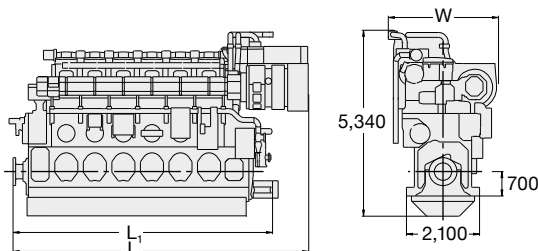

# MAN V51/60DF

High power variant

**Tier II** **Tier III**

Tier III in gas mode

**Bore:** 510 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	21.9	22.5
	<b>kW</b>		<b>kW</b>
<b>12V51/60DF</b>		13,800	13,800
<b>14V51/60DF</b>		16,100	16,100
<b>16V51/60DF</b>		18,400	18,400
<b>18V51/60DF</b>		20,700	20,700

LHV of fuel gas  $\geq 28,000$  kJ/Nm<sup>3</sup>

(Nm<sup>3</sup> corresponds to one cubic meter of gas at 0 °C and 1.013 bar)

## Specific fuel oil consumption (SFOC) and Heat rate to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>Specific fuel oil consumption<sup>1)</sup></b>	186.0 g/kWh	182.0 g/kWh
<b>Heat rate<sup>2)</sup></b>	7,400 kJ/kWh	7,400 kJ/kWh

Specific lube oil consumption<sup>3)</sup>: 0.35 g/kWh for nominal output 1,150 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C

<sup>1)</sup> Liquid fuel operation


<sup>2)</sup> Gas operation (including pilot fuel), gas fuel: methane no.  $\geq 80$

<sup>3)</sup> Related to 100% actual engine load

## Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>
<b>L</b>	<b>mm</b>	10,254	11,254	12,254	13,644
<b>L<sub>1</sub></b>	<b>mm</b>	9,088	10,088	11,088	12,088
<b>Dry mass</b>	<b>t</b>	187	213	240	265

Minimum centreline distance for twin engine installation: 4,800 mm

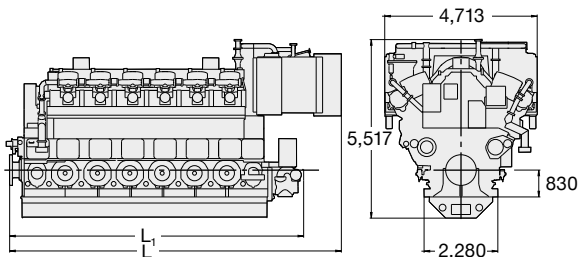

**Bore:** 510 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	21.9	22.5
	<b>kW</b>		<b>kW</b>
<b>6L51/60DF</b>		6,900	6,900
<b>7L51/60DF</b>		8,050	8,050
<b>8L51/60DF</b>		9,200	9,200
<b>9L51/60DF</b>		10,350	10,350

LHV of fuel gas  $\geq 28,000$  kJ/Nm<sup>3</sup>

(Nm<sup>3</sup> corresponds to one cubic meter of gas at 0 °C and 1.013 bar)

**Specific fuel oil consumption (SFOC) and Heat rate to ISO conditions**

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>Specific fuel oil consumption<sup>1)</sup></b>	186.0 g/kWh	182.0 g/kWh
<b>Heat rate<sup>2)</sup></b>	7,400 kJ/kWh	7,400 kJ/kWh

Specific lube oil consumption<sup>3)</sup>: 0.35 g/kWh for nominal output 1,150 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C


<sup>1)</sup> Liquid fuel operation

<sup>2)</sup> Gas operation (including pilot fuel), gas fuel: methane no.  $\geq 80$ 
<sup>3)</sup> Related to 100% actual engine load

**Dimensions**

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L</b>	<b>mm</b>	8,494	9,314	10,134	11,160
<b>L<sub>1</sub></b>	<b>mm</b>	7,455	8,275	9,095	9,915
<b>W</b>	<b>mm</b>	3,165	3,165	3,165	3,283
<b>Dry mass</b>	<b>t</b>	106	119	135	148

Minimum centreline distance for twin engine installation: 3,200 mm

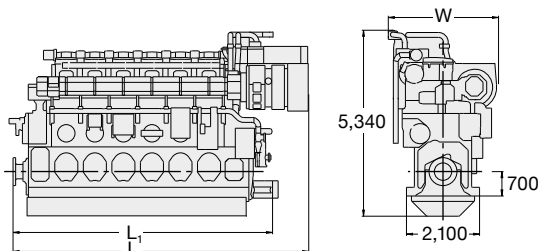

**Bore:** 480 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	25.8	26.5
	<b>kW</b>		<b>kW</b>
<b>12V48/60CR</b>		14,400	14,400
<b>14V48/60CR</b>		16,800	16,800
<b>16V48/60CR</b>		19,200	19,200
<b>18V48/60CR</b>		21,600	21,600

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>V48/60CR</b>	182 g/kWh	173.5 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.5 g/kWh for nominal output 1,200 kW/cyl.


Engine type specific reference charge air temperature before cylinder 37 °C

<sup>1)</sup> Related to 100% actual engine load

### Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>
<b>L</b>	<b>mm</b>	10,790	11,790	13,140	14,140
<b>L<sub>1</sub></b>	<b>mm</b>	9,088	10,088	11,088	12,088
<b>Dry mass</b>	<b>t</b>	189	213	240	265

Minimum centreline distance for twin engine installation: 4,800 mm

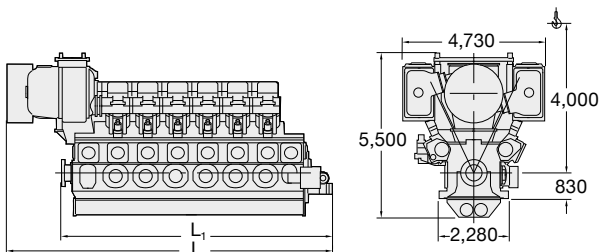

Tier III with SCR

**Bore:** 480 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	25.8	26.5
	<b>kW</b>		<b>kW</b>
<b>6L48/60CR</b>		7,200	7,200
<b>7L48/60CR</b>		8,400	8,400
<b>8L48/60CR</b>		9,600	9,600
<b>9L48/60CR</b>		10,800	10,800

**Specific fuel oil consumption (SFOC) to ISO conditions**

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>L48/60CR</b>	184.0 g/kWh	175.5 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.5 g/kWh for nominal output 1,200 kW/cyl.


Engine type specific reference charge air temperature before cylinder 37 °C

<sup>1)</sup> Related to 100% actual engine load

**Dimensions**

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L</b>	<b>mm</b>	8,760	9,580	10,540	11,360
<b>L<sub>1</sub></b>	<b>mm</b>	7,455	8,275	9,095	9,915
<b>W</b>	<b>mm</b>	3,165	3,165	3,280	3,280
<b>Dry mass</b>	<b>t</b>	106	119	135	148

Minimum centreline distance for twin engine installation: 3,200 mm

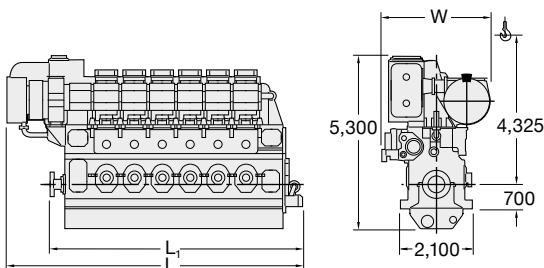

**Bore:** 480 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	514	500
<b>mep</b>	<b>bar</b>	24.7	25.4
	<b>kW</b>		<b>kW</b>
<b>12V48/60B</b>		13,800	13,800
<b>14V48/60B</b>		16,100	16,100
<b>16V48/60B</b>		18,400	18,400
<b>18V48/60B</b>		20,700	20,700

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>V48/60B</b>	184 g/kWh	180 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.46 g/kWh for nominal output 1,150 kW/cyl.


Engine type specific reference charge air temperature before cylinder 37 °C

<sup>1)</sup> Related to 100% actual engine load

### Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>
<b>L</b>	<b>mm</b>	10,790	11,790	13,140	14,140
<b>L<sub>1</sub></b>	<b>mm</b>	9,088	10,088	11,088	12,088
<b>Dry mass</b>	<b>t</b>	186	209	240	259

Minimum centreline distance for twin engine installation: 4,800 mm

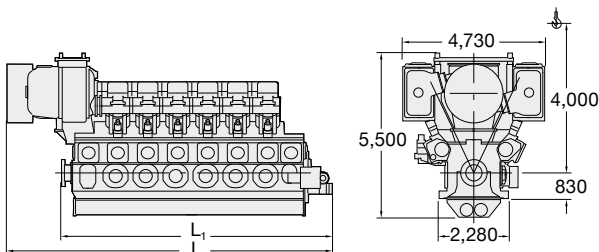

Tier III with SCR

**Bore:** 480 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>				
			514		500
<b>mep</b>	<b>bar</b>		24.7		25.4
			<b>kW</b>		<b>kW</b>
<b>6L48/60B</b>			6,900		6,900
<b>7L48/60B</b>			8,050		8,050
<b>8L48/60B</b>			9,200		9,200
<b>9L48/60B</b>			10,350		10,350

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>L48/60B</b>	186 g/kWh	182 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.46 g/kWh for nominal output 1,150 kW/cyl.


Engine type specific reference charge air temperature before cylinder 37 °C

<sup>1)</sup> Related to 100% actual engine load

### Dimensions

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L</b>	<b>mm</b>	8,760	9,580	10,540	11,360
<b>L<sub>1</sub></b>	<b>mm</b>	7,455	8,275	9,095	9,915
<b>W</b>	<b>mm</b>	3,165	3,165	3,280	3,280
<b>Dry mass</b>	<b>t</b>	104	118	134	146

Minimum centreline distance for twin engine installation: 3,200 mm

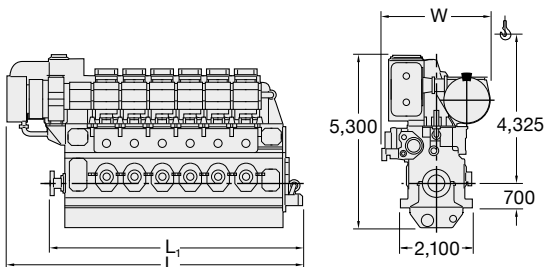

**Bore:** 450 mm, **Stroke:** 600 mm

<b>Speed</b>	<b>r/min</b>	600
<b>mep</b>	<b>bar</b>	27.3
		<b>kW</b>
<b>12V45/60CR</b>		15,600
<b>14V45/60CR</b>		18,200

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>V45/60CR</b>	170.0 g/kWh	166.0 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.5 g/kWh for nominal output 1,300 kW/cyl.



Engine type specific reference charge air temperature before HP TC 43 °C / before cylinder 37 °C

<sup>1)</sup> Related to 100% actual engine load

### Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>
<b>L</b>	<b>mm</b>	11,330	12,310
<b>L<sub>i</sub></b>	<b>mm</b>	10,590	11,570
<b>W</b>	<b>mm</b>	4,970	4,970
<b>H</b>	<b>mm</b>	5,240	5,240
<b>Dry mass</b>	<b>t</b>	204	230

Minimum centreline distance for twin engine installation: 5,050 mm

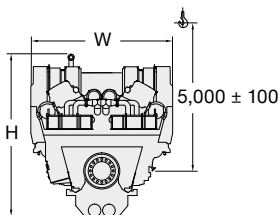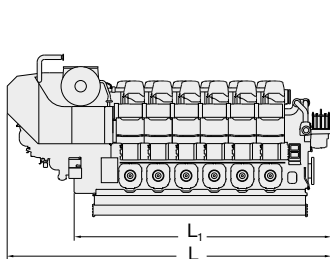

Tier III in gas mode

**Bore:** 350 mm, **Stroke:** 440 mm

<b>Speed</b>	<b>r/min</b>	750	720
<b>mep</b>	<b>bar</b>	20.0	20.1
	<b>kW</b>		<b>kW</b>
<b>6L35/44DF</b>		3,180	3,060
<b>7L35/44DF</b>		3,710	3,570
<b>8L35/44DF</b>		4,240	4,080
<b>9L35/44DF</b>		4,770	4,590
<b>10L35/44DF</b>		5,300	5,100

LHV of fuel gas  $\geq 28,000$  kJ/Nm<sup>3</sup>

(Nm<sup>3</sup> corresponds to one cubic meter of gas at 0 °C and 1.013 bar)

### Specific fuel oil consumption (SFOC) and Heat rate to ISO conditions

<b>MCR</b>		<b>100%</b>	<b>85%</b>
<b>Specific fuel oil consumption<sup>1)</sup></b>	6L	179.5 g/kWh	175.5 g/kWh
	7L-10L	178.5 g/kWh	175.5 g/kWh
<b>Heat rate<sup>2)</sup></b>		7,410 kJ/kWh	7,440 kJ/kWh

Specific lube oil consumption<sup>3)</sup>: 0.5 g/kWh for nominal output 530 kW/cyl. or 0.52 g/kWh for nominal output 510 kW/cyl.

Engine type specific reference charge air temperature before cylinder 40 °C

<sup>1)</sup> Liquid fuel operation

<sup>2)</sup> Gas operation (including pilot fuel), gas fuel: methane no.  $\geq 80$

<sup>3)</sup> Related to 100% actual engine load


### Dimensions

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>L</b>	<b>mm</b>	6,485	7,015	7,545	8,075	8,605
<b>L<sub>1</sub></b>	<b>mm</b>	5,265	5,877	6,407	6,937	7,556
<b>W</b>	<b>mm</b>	2,539	2,678	2,678	2,678	2,678
<b>H</b>	<b>mm</b>	4,163	4,369	4,369	4,369	4,369
<b>Dry mass<sup>4)</sup></b>	<b>t</b>	43.1	48.2	53.3	57.6	62.3

Minimum centreline distance for twin engine installation: 2,500 mm

<sup>4)</sup> Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Speed 720 r/min for generator drive only

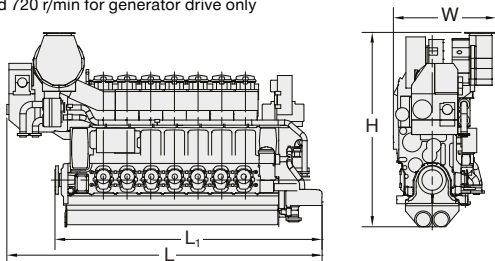

**Bore:** 320 mm, **Stroke:** 440 mm

<b>Speed</b>	<b>r/min</b>	750	720
<b>mep</b>	<b>bar</b>	27.1	28.3
	<b>kW</b>		<b>kW</b>
<b>12V32/44CR</b>		7,200	7,200
<b>14V32/44CR<sup>1)</sup></b>		8,120	8,120
<b>16V32/44CR</b>		9,600	9,600
<b>18V32/44CR<sup>2)</sup></b>		10,800	10,800
<b>20V32/44CR</b>		12,000	12,000

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>V32/44CR</b>	175.5 g/kWh	172.0 g/kWh
<b>14V32/44CR</b>	175.5 g/kWh	173.0 g/kWh
<b>V32/44CR FPP</b>	176.5 g/kWh	172.5 g/kWh
<b>14V32/44CR FPP</b>	177.5 g/kWh	174.0 g/kWh

Specific lube oil consumption<sup>3)</sup>: 0.5 g/kWh for nominal output 600 kW/cyl., 0.52 g/kWh for nominal output 580 kW/cyl., 0.55 g/kWh for nominal output 550 kW/cyl.

Engine type specific reference charge air temperature before cylinder 40 °C

### Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>	<b>20</b>
<b>L</b>	<b>mm</b>	7,195	7,970	8,600	9,230	9,860
<b>L<sub>1</sub></b>	<b>mm</b>	5,795	6,425	7,055	7,685	8,315
<b>W</b>	<b>mm</b>	3,100	3,100	3,100	3,100	3,100
<b>H</b>	<b>mm</b>	4,039	4,262	4,262	4,262	4,262
<b>Dry mass<sup>4)</sup></b>	<b>t</b>	70	79	87	96	104

Minimum centreline distance for twin engine installation: 4,000 mm

Speed 720 r/min for generator drive/constant speed operation only

<sup>1)</sup> 580 kW/cyl.


<sup>2)</sup> 18V32/44CR available rigidly mounted only

<sup>3)</sup> Related to 100% actual engine load

<sup>4)</sup> Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Fixed pitch propeller: 550 kW/cyl., 750 r/min

Wet oil sump available upon request

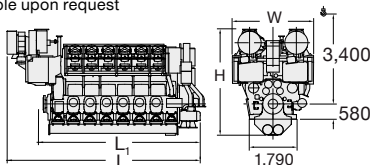

Tier III with SCR

Bore: 320 mm, Stroke: 440 mm

Speed	r/min	750	720
mep	bar	27.1	28.3
	kW		kW
6L32/44CR	3,600		3,600
7L32/44CR <sup>1)</sup>	4,060		4,060
8L32/44CR	4,800		4,800
9L32/44CR	5,400		5,400
10L32/44CR	6,000		6,000

### Specific fuel oil consumption (SFOC) to ISO conditions

MCR	100%	85%
L32/44CR	175.5 g/kWh	172.0 g/kWh
7L32/44CR	175.5 g/kWh	173.0 g/kWh
L32/44CR FPP	176.5 g/kWh	172.5 g/kWh
7L32/44CR FPP	177.5 g/kWh	174.0 g/kWh

Specific lube oil consumption<sup>2)</sup>: 0.5 g/kWh for nominal output 600 kW/cyl., 0.52 g/kWh for nominal output 580 kW/cyl., 0.55 g/kWh for nominal output 550 kW/cyl.

Engine type specific reference charge air temperature before cylinder 40 °C

### Dimensions

Cyl. No.		6	7	8	9	10
L	mm	6,312	6,924	7,454	7,984	8,603
L <sub>1</sub>	mm	5,265	5,877	6,407	6,937	7,556
W	mm	2,174	2,359	2,359	2,359	2,359
H	mm	4,163	4,369	4,369	4,369	4,369
Dry mass <sup>3)</sup>	t	39.5	44.5	49.5	53.5	58.0

Minimum centreline distance for twin engine installation: 2,500 mm

Speed 720 r/min for generator drive/constant speed operation only



<sup>1)</sup> 580 kW/cyl.

<sup>2)</sup> Related to 100% actual engine load

<sup>3)</sup> Including built-on lube oil automatic filter, fuel oil filter and electronic equipment

Fixed pitch propeller: 550 kW/cyl., 750 r/min

Wet oil sump available upon request

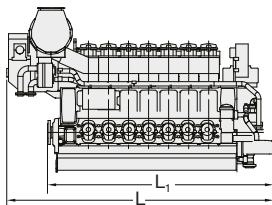

**Bore:** 320 mm, **Stroke:** 400 mm

<b>Speed</b>	<b>r/min</b>	750	720
<b>mep</b>	<b>bar</b>	24.9	25.9
	<b>kW</b>		<b>kW</b>
<b>12V32/40</b>		6,000	6,000
<b>14V32/40</b>		7,000	7,000
<b>16V32/40</b>		8,000	8,000
<b>18V32/40</b>		9,000	9,000

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	100%	85%
<b>V32/40</b>	184 g/kWh	182 g/kWh
<b>V32/40 FPP</b>	187 g/kWh	183 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C

### Dimensions

<b>Cyl. No.</b>		12	14	16	18
<b>L</b>	<b>mm</b>	6,915	7,545	8,365	8,995
<b>L<sub>1</sub></b>	<b>mm</b>	5,890	6,520	7,150	7,780
<b>W</b>	<b>mm</b>	3,140	3,140	3,730	3,730
<b>H</b>	<b>mm</b>	4,100	4,100	4,420	4,420
<b>Dry mass</b>	<b>t</b>	61	68	77	85


Minimum centreline distance for twin engine installation: 4,000 mm

Speed 720 r/min for generator drive/constant speed operation only

Fixed pitch propeller: 450 kW/cyl., 750 r/min

V32/40 as marine main engine to be applied for multi-engine plants only

<sup>1)</sup> Related to 100% actual engine load

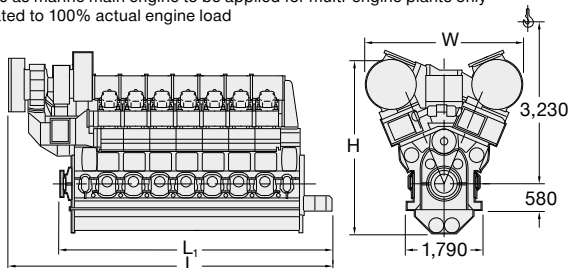

Tier III with SCR

**Bore:** 320 mm, **Stroke:** 400 mm

<b>Speed</b>	<b>r/min</b>	750	720
<b>mep</b>	<b>bar</b>	24.9	25.9
	<b>kW</b>		<b>kW</b>
<b>6L32/40</b>		3,000	3,000
<b>7L32/40</b>		3,500	3,500
<b>8L32/40</b>		4,000	4,000
<b>9L32/40</b>		4,500	4,500

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	100%	85%
<b>L32/40</b>	186 g/kWh	183 g/kWh
<b>L32/40 FPP</b>	189 g/kWh	184 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.5 g/kWh for nominal output 500 kW/cyl., 0.56 g/kWh for nominal output 450 kW/cyl.

Engine type specific reference charge air temperature before cylinder 43 °C

### Dimensions

<b>Cyl. No.</b>		6	7	8	9
<b>L</b>	<b>mm</b>	5,940	6,470	7,000	7,530
<b>L<sub>1</sub></b>	<b>mm</b>	5,140	5,670	6,195	6,725
<b>W</b>	<b>mm</b>	2,630	2,630	2,715	2,715
<b>H</b>	<b>mm</b>	4,010	4,010	4,490	4,490
<b>Dry mass</b>	<b>t</b>	38	42	47	51


Minimum centreline distance for twin engine installation: 2,500 mm<sup>2)</sup>

Speed 720 r/min for generator drive/constant speed operation only

Fixed pitch propeller: 450 kW/cyl., 750 r/min

<sup>1)</sup> Related to 100% actual engine load

<sup>2)</sup> Please contact MAN Energy Solutions for the precise information about the centreline distance for two engines with the same cylinder number standing near each other

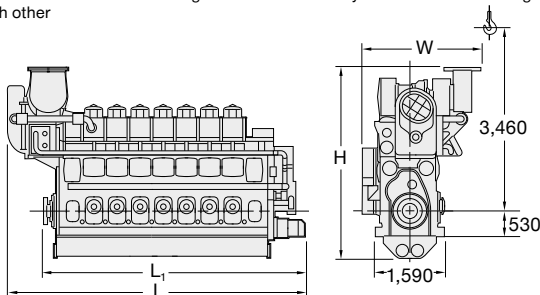

**Bore:** 280 mm, **Stroke:** 330 mm

				Load profile 'Navy'	
Speed	r/min	1,000			1,032
mep	bar	26.9			28.6
Rated power output		- ICN (MCR)	kW	- ICFN	kW
12V28/33D STC			5,460		6,000
16V28/33D STC			7,280		8,000
20V28/33D STC			9,100		10,000

### Specific fuel oil consumption (SFOC) to ISO conditions

ICFN fuel stop power	-	193.0 g/kWh
MCR 100%	189.0 g/kWh	189.0 g/kWh
MCR 85%	184.5 g/kWh	194.5 g/kWh

Specific lube oil consumption<sup>1)</sup>: 0.4 g/kWh for nominal output 455 kW/cyl.

Engine type specific reference charge air temperature before cylinder 40 °C

Figures on theoretical propeller curve for distillates according to ISO 8217 DMA, with all attached pumps

### Dimensions

Cyl. No.		12	16	20
L	mm	6,207	7,127	8,047
H <sup>2)</sup>	mm	3,417	3,417	3,417
H <sup>3)</sup>	mm	3,682	3,682	3,682
Dry mass <sup>4)</sup>	t	36.0	43.5	51.2

<sup>1)</sup> Related to 100% actual engine load


<sup>2)</sup> With low oilsump

<sup>3)</sup> With deep oilsump

Weight and performance parameters refer to engine with flywheel, TC silencer, attached pumps, oil filters and lube oil cooler

<sup>4)</sup> Tolerance: 5%

V28/33D STC as marine main engine to be applied for multi-engine plants only in class-approved vessels

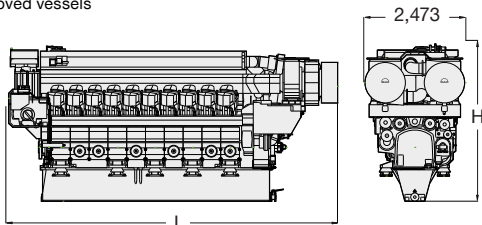

Tier III with SCR

**Bore:** 280 mm, **Stroke:** 320 mm

<b>Speed</b>	<b>r/min</b>	775
<b>mep</b>	<b>bar</b>	19.3
		kW
<b>6L28/32A</b>		1,470
<b>7L28/32A<sup>1)</sup></b>		1,715
<b>8L28/32A</b>		1,960
<b>9L28/32A</b>		2,205

**Specific fuel oil consumption (SFOC) to ISO conditions**

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>L28/32A</b>	194 g/kWh	192 g/kWh
<b>L28/32A FPP</b>	194 g/kWh	192 g/kWh

Specific lube oil consumption 1.0 g/kWh


Engine type specific reference charge air temperature before cylinder 40 °C

**Dimensions**

<b>Cyl. No.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>L</b>	<b>mm</b>	5,330	5,810	6,290	6,770
<b>L<sub>1</sub></b>	<b>mm</b>	4,340	4,750	5,230	5,780
<b>W</b>	<b>mm</b>	1,732	1,732	1,732	1,844
<b>H</b>	<b>mm</b>	3,186	3,186	3,186	3,242
<b>Dry mass</b>	<b>t</b>	18.0	20.5	23.0	25.5

Minimum centreline distance for twin-engine installation: 2,000 mm

<sup>1)</sup> Not available for fixed pitch propeller (FPP)

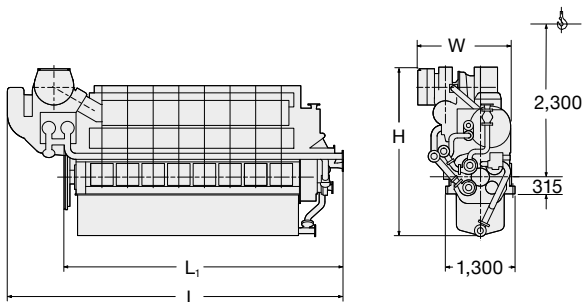

**Bore:** 270 mm, **Stroke:** 380 mm

Speed	r/min	800	800 (MDO <sup>1)</sup> /MGO)
mep	bar	23.5	25.2
		<b>kW</b>	<b>kW</b>
6L27/38		2,040	2,190
7L27/38		2,380	2,555
8L27/38		2,720	2,920
9L27/38		3,060	3,285

### Specific fuel oil consumption (SFOC) to ISO conditions

MCR	100%		85%	
	340 kW	365 kW	340 kW	365 kW
L27/38	188 g/kWh	191 g/kWh	185 g/kWh	186 g/kWh
L27/38 FPP	187 g/kWh	191 g/kWh	181 g/kWh	185 g/kWh

Specific lube oil consumption 0.8 g/kWh


Engine type specific reference charge air temperature before cylinder 40 °C

### Dimensions

Cyl. No.		6	7	8	9
L	mm	5,070	5,515	5,960	6,405
L <sub>1</sub>	mm	3,962	4,407	4,852	5,263
H	mm	3,555	3,687	3,687	3,687
Dry mass	t	29.0	32.5	36.0	39.5

Minimum centreline distance for twin engine installation: 2,500 mm

<sup>1)</sup> MDO viscosity must not exceed 6 mm<sup>2</sup>/s = cSt at 40 °C.

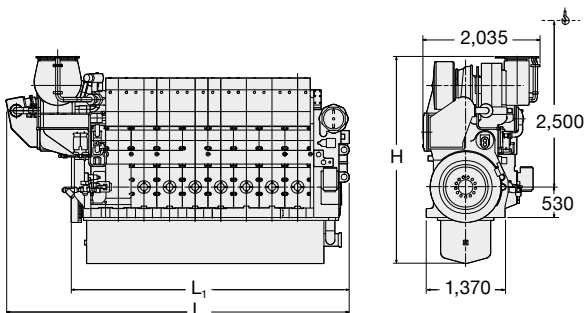

Tier III with SCR

**Bore:** 225 mm, **Stroke:** 300 mm

<b>Speed</b>	<b>r/min</b>	900
<b>mep</b>	<b>bar</b>	17.1
		<b>kW</b>
<b>6L23/30A</b>		960
<b>8L23/30A</b>		1,280

**Specific fuel oil consumption (SFOC) to ISO conditions**

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>L23/30A</b>	194 g/kWh	193 g/kWh
<b>L23/30A FPP</b>	194 g/kWh	193 g/kWh


Specific lube oil consumption 1.0 g/kWh

Engine type specific reference charge air temperature before cylinder 40 °C

**Dimensions**

<b>Cyl. No.</b>		<b>6</b>	<b>8</b>
<b>L</b>	<b>mm</b>	3,737	4,477
<b>L<sub>1</sub></b>	<b>mm</b>	3,062	3,802
<b>Dry mass</b>	<b>t</b>	11.0	13.5

Minimum centreline distance for twin engine installation: 1,900 mm

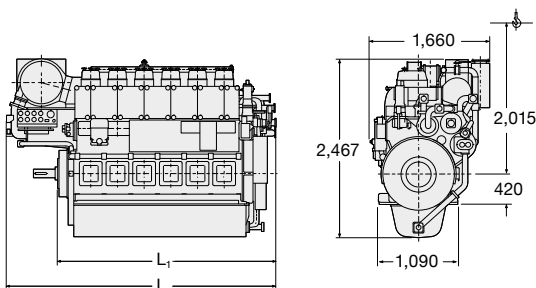

**Bore:** 210 mm, **Stroke:** 310 mm

<b>Speed</b>	<b>r/min</b>	1,000
<b>mep</b>	<b>bar</b>	24.0
	<b>kW</b>	
<b>6L21/31</b>		1,290
<b>7L21/31</b>		1,505
<b>8L21/31</b>		1,720
<b>9L21/31</b>		1,935

### Specific fuel oil consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>L21/31</b>	195 g/kWh	192 g/kWh


Specific lube oil consumption 0.8 g/kWh

Engine type specific reference charge air temperature before cylinder 40 °C

### Dimensions

Cyl. No.		6	7	8	9
<b>L</b>	<b>mm</b>	4,544	4,899	5,254	5,609
<b>L<sub>1</sub></b>	<b>mm</b>	3,424	3,779	4,134	4,489
<b>H</b>	<b>mm</b>	3,113	3,267	3,267	3,267
<b>W</b>	<b>mm</b>	1,695	1,695	1,820	1,820
<b>Dry mass</b>	<b>t</b>	16.0	17.5	19.0	20.5

Minimum centreline distance for twin engine installation: 2,400 mm

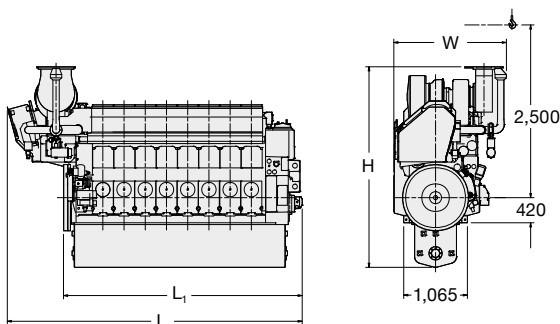



**MAN Energy Solutions**



Bore: 185 mm, Stroke: 196 mm

Engine model	Rating definition	kW	rpm	SFOC at 100% MCR	SFOC at 75% MCR
				g/kWh	g/kWh
<b>12VP185TM</b>	B: Unrestricted Marine	2,000	1,765	208	202
<b>12VP185TM</b>	A2: Unrestricted Marine	2,300	1,860	211	203
<b>12VP185TM</b>	A1: Limited Time	2,720	1,950	216	205
<b>18VP185TM</b>	B: Unrestricted Marine	3,000	1,765	208	202
<b>18VP185TM</b>	A2: Unrestricted Marine	3,500	1,860	211	203
<b>18VP185TM</b>	A1: Limited Time	4,000	1,950	216	205

Specific fuel oil consumption according to ISO 3046-1:2002 based on a lower calorific value of fuel of 42,700 kJ/kg with all driven lube oil, HT and LT water pumps attached, fulfilling IMO Tier II emissions limitations of +5% SFOC tolerance. 45°C ambient 32°C sea water.

### Rating definitions:

#### A1 rating

For fast patrol craft where the rated power is only required for approximately 15% of the operating profile.

#### A2 rating

For fast patrol or displacement craft where 90% to 100% of rated power is likely to be used for 70% of the operating profile.

#### B rating


Typically for longer range displacement vessels where 70% to 100% of the rated power is likely to be used for >70% of the operating profile.

### Dimensions

Cyl. No.		12	18
<b>L</b>	mm	3,200	4,039
<b>H</b>	mm	2,312	2,447
<b>W</b>	mm	1,692	1,692
<b>Dry mass<sup>1)</sup></b>	t	7.8	11.1

<sup>1)</sup> Approximately

Engine dry weight includes the engine mounted sea water heat exchanger and oil cooler. The dimensions given are for guidance only.

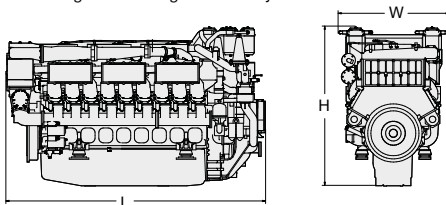

Tier III with SCR

**Bore:** 175 mm, **Stroke:** 215 mm

Engine model	Rating def.	kW	rpm	SFOC at 100% MCR Tier II/Tier III	SFOC at 75% MCR Tier II/Tier III	Avg. Load <sup>1)</sup>
				g/kWh	g/kWh	%
<b>12V175D-MH</b>	Heavy Duty	1,499	1,800	204.0/206.0	206.0/208.0	100
<b>12V175D-MH</b>	Heavy Duty	1,499	1,600	195.0/197.0	199.0/201.0	100
<b>12V175D-MH</b>	Heavy Duty	1,740	1,800	198.0/201.0	202.5/205.5	85
<b>12V175D-MM</b>	Medium Duty	1,860	1,800	199.5/201.5	198.0/200.0	80
<b>12V175D-MM</b>	Medium Duty	2,040	1,800	195.0/198.0	199.5/202.5	70
<b>12V175D-MM</b>	Medium Duty	2,220	1,800	195.5/198.5	196.9/199.0	40
<b>12V175D-MM</b>	Medium Duty	2,220	1,900	197.0/200.0	199.0/201.0	65

<sup>1)</sup> Average load up to.


For multi-engine arrangement only. SFOC figures for distillates according to ISO 8217 DMA, with attached lube oil, HT and LT-cooling water pumps.

### Dimensions

Cyl. No.			12
<b>L<sub>1</sub></b>	<b>mm</b>		2,747.5
<b>L<sub>2</sub></b>	<b>mm</b>		145.5
<b>L<sub>3</sub></b>	<b>mm</b>		2,893
<b>H</b>	<b>mm</b>		2,424
<b>W</b>	<b>mm</b>		1,721
<b>Dry weight<sup>2)</sup></b>	<b>t</b>		9.000

<sup>2)</sup> Approximately

Engine dry weight does not include optional sea water cooler and may vary due to various configurations. The dimensions given are for guidance only.

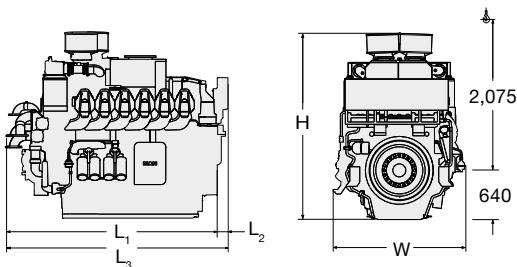



# **MAN** **four-stroke** **marine** **GenSets**



## **MAN four-stroke marine GenSets – all emission requirements**

Besides focus on power density and fuel economy, MAN Energy Solutions is committed to a steady reduction of the environmental impact of our engines.

### **IMO Tier II**

MAN Energy Solutions has decreased NO<sub>x</sub> emissions significantly by applying well-proven methods that ensure a cleaner and more efficient combustion process. Our four-stroke propulsion engines are IMO Tier II compliant by internal engine measures alone.

### **IMO Tier III**


For operation in emission control areas (ECA), MAN Energy Solutions has developed a comprehensive range of selective catalytic reduction (SCR) systems that provides a tremendous reduction in NO<sub>x</sub> levels surpassing IMO Tier III requirements.

MAN Energy Solutions is the first manufacturer to successfully produce and offer IMO Tier III compliant four-stroke marine engines based on a fully modular SCR kit covering our entire four-stroke engine portfolio.

In 2014 MAN Energy Solutions was awarded the first IMO Tier III EIAPP certificate together with the classification society DNV-GL.

MAN Energy Solutions' standard SCR system is available in fourteen different sizes covering our entire portfolio of four-stroke engines. Customised SCR systems are offered on demand.

MAN has developed a complete range of SCR systems that work perfectly with our engines for maximum system efficiency. The intelligent exhaust gas temperature control enables significant savings in fuel consumption as compared to third party supplier systems. MAN SCR systems work with MGO, MDO and HFO with up to 3.5% sulphur.

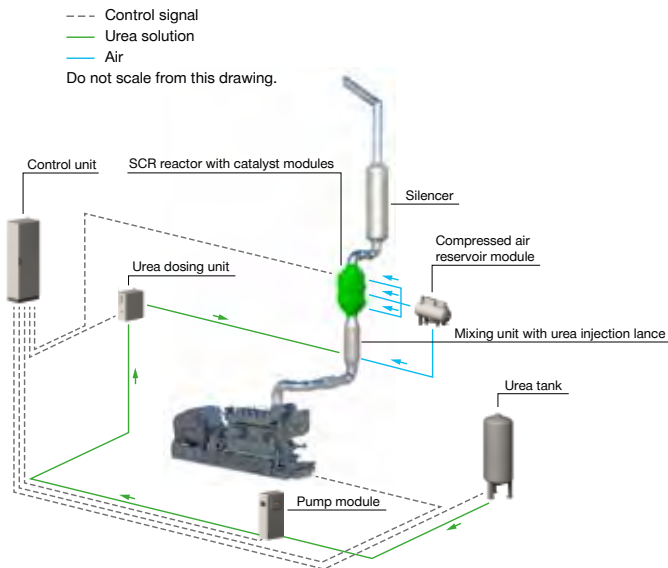

MAN GenSet plant with complete SCR system

## 100% MCR PTO-solutions for L21/31 and L27/38 GenSets

Optimised for both new and existing ship designs.



PTO on alternator – external pump



Pump on alternator – common base frame



PTO on front end – external pump (new feature)



Pump on front end – common base frame (new feature)

## Fuel oil saving for small bore GenSet (part load optimised)

GenSets can be delivered with improved fuel oil consumption at low load and part load. The penalty will be higher SFOC at high load. The part-load optimised engine complies with the IMO Tier II limit.


The new tuning method, referred to as part-load optimisation, optimises the engine performance at approx. 60-65% MCR, as this is often the load range in which the GenSet is operating, but it can also be customised to other specific operating conditions.

With part load optimisation, fuel oil savings of up to 12 g/kWh can be obtained, depending on the engine type/model and load point.

Traditionally, GenSets are optimised at 85% MCR, because the power management system will engage additional GenSets when more power is needed.

With part-load optimisation, there is a fuel oil penalty when the load exceeds approx. 80% MCR, but this has no practical consequence as the GenSet rarely exceeds 85% MCR.

This is illustrated in the figure below. For further information, please contact MAN Energy Solutions.

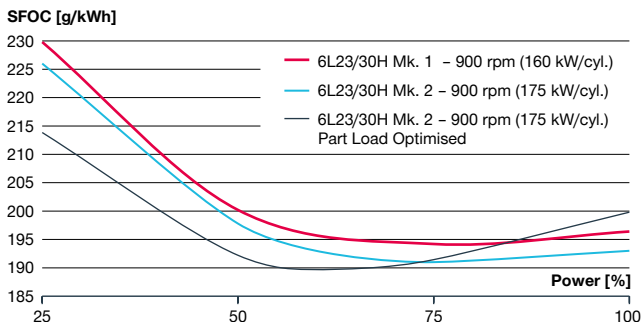

Based on Project Guide figures for IMO Tier II engines – 60Hz:

ISO reference condition, HFO/MDO, without pumps, tolerance +5% (not included)


## Electric and hybrid propulsion power trains (HyProp ECO)

MAN Energy Solutions offers a full range of electric and hybrid propulsion power trains. Our solutions are designed and optimised to meet the highest efficiencies of a complete propulsion plant system covering the complete operational profile of the vessel. Our propulsion systems provide a well-balanced and tailor-made solution with emphasis on increased fuel efficiency, flexibility and performance.

Our comprehensive propulsion packages include the complete array of required components from GenSets to propulsors, including switchboards, variable speed drives and propulsion motors. Full electric propulsion power trains as well as hybrid systems ensure the optimal technical and economical solution while maximising power demand flexibility.

With HyProp ECO a hybrid propulsion system was introduced to the market for controlling the power delivered by or to the shaft machine. It overcomes the constraint on constant speed propulsion machinery by utilising variable speed drives at the shaft generator/motor.


Our new developed HyProp battery system also integrates batteries which enable an optimised loading of our engines, and provide electrical spinning reserve, dynamic support of the propellers as well as peak shaving.

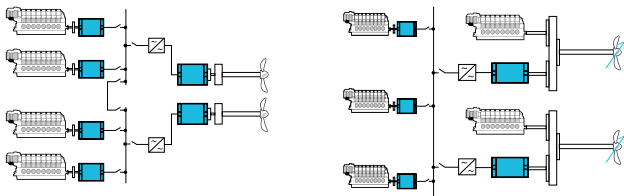

High-efficient and customised power trains for electric and hybrid propulsion applications

# HyProp ECO

## Hybrid propulsion system

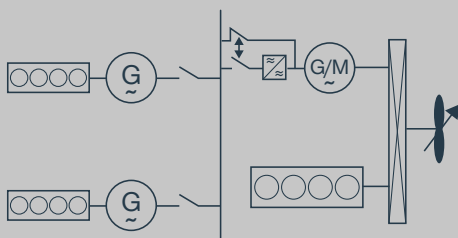


## Energy saving electric propulsion (EPROX-DC)

Recent developments in electric propulsion have resulted in electric systems where engines can operate at variable speed. The “classic” constant speed operation of GenSets is no longer a constraint. Utilising an enlarged engine operation map with a speed range of 60% to 100% paves the way to a high potential in fuel oil savings. Each speed set point of the engines can be adjusted independently in order to achieve a minimum fuel oil consumption according to the system load. The electric system using DC distribution enables a decoupled operation of the engines, propulsion drives, and other consumers of energy.

Another major advantage is the possible integration of energy storage sources, like batteries. They can reduce the transient loads on the engines and improve the dynamic response of the propulsion system. Fast load application is removed from the engines and load peaks are shaved. Also, emission free propulsion can be realized when running on the batteries. In addition, the energy storage sources will have a positive effect on engine maintenance.

MAN Energy Solutions offers this advanced package solution in close cooperation with our partner Aspin Kemp & Associates.

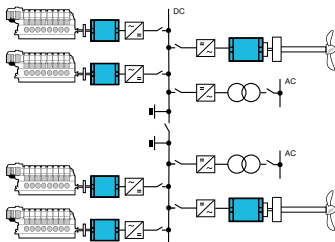

EPROX-DC energy-saving electric propulsion plant

# EPROX-DC

## propulsion solution

EPROX-DC propulsion solution on anchor handling tug supply vessel




## MAN L23/30H monocoque GenSet – continued development

The monocoque GenSet includes several updates of the tried and tested L23/30H engine, which are focused on weight reduction, vibration optimisation and simplified installation.

The most significant update is that the alternator is now a load-bearing component, with a 'top brace' connection to the engine. This enables up to 63% weight reduction of the base frame, which again results in weight reduction of up to 13% of the GenSet and a lower vibration level.

The three and four point 'deck-level' supports significantly simplify the GenSet installation process. This design is installed on a flat deck, which is a major reduction of the vessels foundation structure. Furthermore, applying only three conicals makes the GenSets self-leveling.

The monocoque GenSet application is available for all variants of the L23/30H engine.

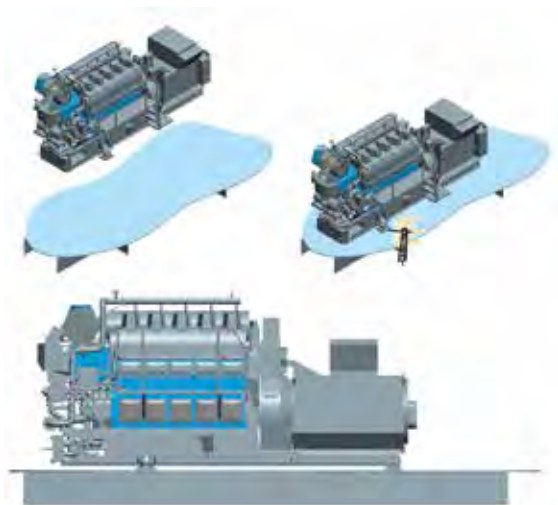

Monocoque GenSet


## Marine fuels after 2020 (in accordance with ISO 8217)

From 1 January 2020, the global 0.5% limit for sulphur content in marine fuels enters into force. To ensure compliant operation, one of following methods must be used:

- HFO GenSet running on a compliant low-sulphur fuel oil (LSFO) in accordance with ISO 8217.
- Global: max 0.5% sulphur (VLSFO).
- ECA: max 0.1% sulphur (ULSFO).
- HFO GenSet running on a high-sulphur fuel oil (HSFO) in accordance with ISO 8217 and with a SO<sub>x</sub> scrubber for exhaust gas cleaning.
- DF GenSet running on LNG with a compliant pilot distillate fuel.

MAN GenSets have for decades been running on low-sulphur and low-viscosity fuels on small power plants on Greenland. The many years of experience have been transferred to the standard marine GenSet. To be prepared for operation on compliant fuels after 2020, the HFO GenSets will be updated with optimised fuel pumps and inlet/exhaust valve materials for low-viscosity fuels.

It is important to note that paraffinic and aromatic fuels are incompatible and should not be mixed in the same fuel tank. Notice the issued Service Letters, PrimeServ Customer Information and follow MAN guidelines.

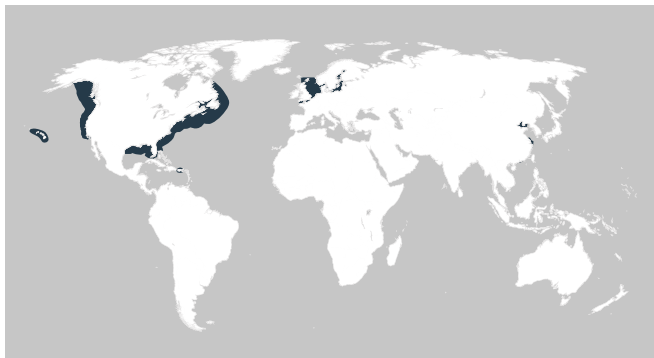

■ ECAs – 0.10% S (effective 2015)    ■ Global sulfur cap – 0.50% S (effective 2020)

# MAN four-stroke marine GenSets programme


r/min	Engine type			
720-750	L35/44DF			
720-750	V32/44CR			
720-750	L32/44CR			
720-750	L32/44			
720-750	V32/40			
720-750	L32/40			
900-1,000	PA6 B OG			
720-750	L28/32H			
720-750	L28/32DF			
720-750	L27/38 – L27/38 (MDO/MGO)			
720-900	L23/30DF			
720-900	L23/30H Mk 3			
720-900	L23/30H Mk 2			
900-1,000	L21/31			
1,500-1,800	175D			

0

## GenSets

GenSets can be applied as auxiliary GenSets, GenSets for electric propulsion or for offshore applications.

Project specific demands can be clarified at an early project stage.

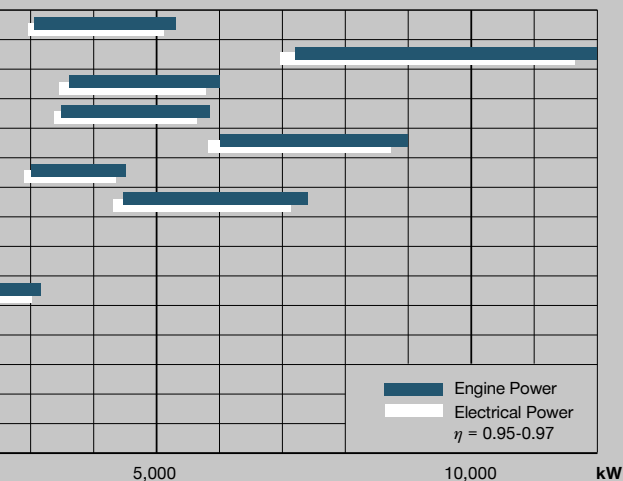

### Tier III GenSets

Four-stroke GenSets are Tier III compatible when a downstream SCR is added to clean the exhaust gas on a Tier II engine. The additional SCR will only have an impact on SFOC if the backpressure is increased.



Tier III in gas mode

**Bore:** 350 mm, **Stroke:** 440 mm

<b>Speed</b>	<b>r/min</b>	750		720	
<b>Frequency</b>	<b>Hz</b>	50		60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>6L35/44DF</b>		3,180	3,069	3,060	2,953
<b>7L35/44DF</b>		3,710	3,580	3,570	3,445
<b>8L35/44DF</b>		4,240	4,092	4,080	3,937
<b>9L35/44DF</b>		4,770	4,603	4,590	4,429
<b>10L35/44DF</b>		5,300	5,115	5,100	4,922


### Dimensions<sup>2)</sup>

<b>Cyl. no.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>A</b>	<b>mm</b>	6,270	6,900	7,480	8,110	8,690
<b>B<sup>3)</sup></b>	<b>mm</b>	3,900	4,100	4,400	4,600	4,800
<b>C<sup>3)</sup></b>	<b>mm</b>	10,170	11,000	11,880	12,710	13,490
<b>W</b>	<b>mm</b>	2,958	3,108	3,108	3,108	3,108
<b>H</b>	<b>mm</b>	4,631	4,867	4,867	4,867	4,867
<b>Dry mass<sup>3)</sup></b>	<b>t</b>	85	94	103	110	118

<sup>1)</sup> Based on nominal generator efficiencies of 96.5%

<sup>2)</sup> Dimensions are not finally fixed

<sup>3)</sup> Depending on alternator applied

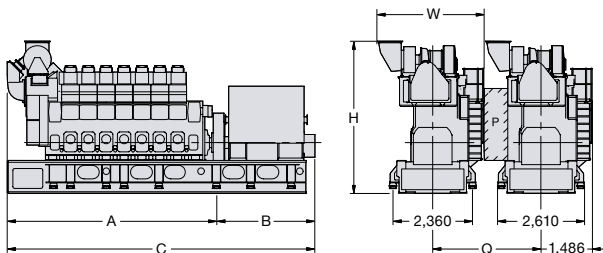

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~3,400 mm (with gallery)

**Bore:** 320 mm, **Stroke:** 440 mm

Speed	r/min	750	720	
Frequency	Hz	50	60	
	Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
12V32/44CR	7.200	6.984	7.200	6.984
14V32/44CR <sup>2)</sup>	8.120	7.876	8.120	7.876
16V32/44CR	9,600	9,312	9,600	9,312
18V32/44CR <sup>3)</sup>	10,800	10,476	10,800	10,476
20V32/44CR	12,000	11,640	12,000	11,640

### Dimensions


Cyl. no.		12	14	16	18	20
A	mm	5,382	6,012	6,642	7,272	7,902
B	mm	4,201	4,201	4,201	4,201	4,201
C	mm	11,338	11,968	12,598	13,228	13,858
H	mm	5,014	5,014	5,014	5,014	5,014
Dry mass	t	117	131	144	159	172

<sup>1)</sup> Based on nominal generator efficiencies of 97%

<sup>2)</sup> 580 kW/cyl.

<sup>3)</sup> 18V32/44CR available rigidly mounted only

Frame Auxiliary Box (FAB) available upon request

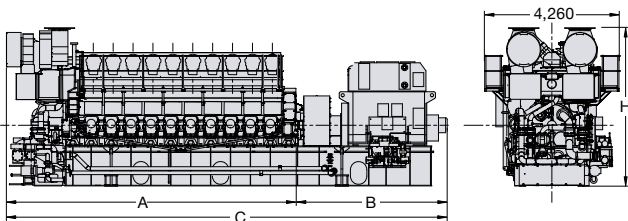

Tier III with SCR

Bore: 320 mm, Stroke: 440 mm

Speed r/min	750		720	
Frequency Hz	50		60	
	Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
6L32/44CR	3,600	3,474	3,600	3,474
7L32/44CR <sup>2)</sup>	4,060	3,918	4,060	3,918
8L32/44CR	4,800	4,632	4,800	4,632
9L32/44CR	5,400	5,211	5,400	5,211
10L32/44CR	6,000	5,790	6,000	5,790


### Dimensions

Cyl. no.		6	7	8	9	10
L	mm	10,738	11,268	11,798	12,328	12,858
L <sub>1</sub>	mm	10,150	10,693	11,236	11,779	12,309
W	mm	2,490	2,490	2,573	2,573	2,573
H	mm	4,768	4,768	4,955	4,955	4,955
Dry mass	t	71	78	84	91	97

<sup>1)</sup> Based on nominal generator efficiencies of 96.5%

<sup>2)</sup> 580 kW/cyl.

Frame Auxiliary Box (FAB) available upon request

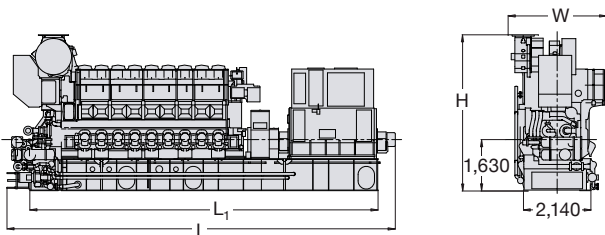

Free passage between the engines, width 600 mm and height 2,000 mm

Minimum distance between centre of engines: ~2,835 mm (without gallery) ~3,220 mm (with gallery)



Tier III with SCR

Exclusively for auxiliary GenSet operation. High power density and space saving GenSet with conventional injection and optimised SFOC for part-load operation.


**Bore: 320 mm, Stroke: 440 mm**

Speed	r/min	750		720	
Frequency	Hz	50		60	
		Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
<b>6L32/44</b>		3,498	3,375	3,498	3,375
<b>8L32/44</b>		4,664	4,500	4,664	4,500
<b>9L32/44</b>		5,247	5,063	5,247	5,063
<b>10L32/44</b>		5,830	5,625	5,830	5,625

### Dimensions

Cyl. no.		6	8	9	10
<b>A</b>	mm	6,470	7,531	8,061	8,590
<b>B</b>	mm	3,990	4,229	4,529	4,530
<b>C</b>	mm	10,460	11,760	12,590	13,120
<b>W</b>	mm	2,845	3,054	3,105	3,105
<b>H</b>	mm	4,701	4,887	4,887	4,887
<b>Dry mass</b>	t	82	98	107	113

<sup>1)</sup> Based on nominal generator efficiencies of 96.5%

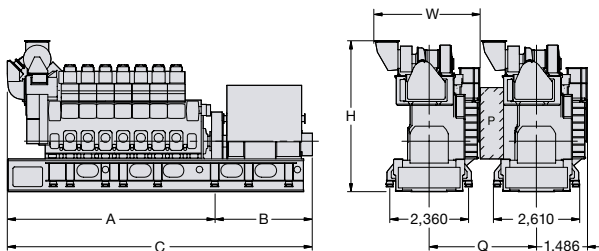

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,835 mm (with gallery)



**Bore:** 320 mm, **Stroke:** 400 mm

Speed	r/min	750	720	
Frequency	Hz	50	60	
	Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
12V32/40	6,000	5,820	6,000	5,820
14V32/40	7,000	6,790	7,000	6,790
16V32/40	8,000	7,760	8,000	7,760
18V32/40	9,000	8,730	9,000	8,730

### Dimensions

Cyl. no.		12	14	16	18
L	mm	11,045	11,710	12,555	13,185
L <sub>1</sub>	mm	10,450	11,115	11,950	12,580
W	mm	3,365	3,365	3,730	3,730
H	mm	4,850	4,850	5,245	5,245
Dry mass	t	101	113	126	138

<sup>1)</sup> Based on nominal generator efficiencies of 97%

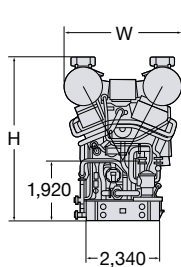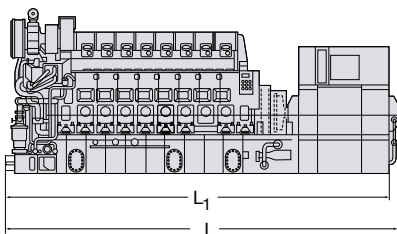



Tier III with SCR

**Bore:** 320 mm, **Stroke:** 400 mm

Speed	r/min	750	720		
Frequency	Hz	50	60		
		Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
6L32/40		3,000	2,895	3,000	2,895
7L32/40		3,500	3,378	3,500	3,378
8L32/40		4,000	3,860	4,000	3,860
9L32/40		4,500	4,343	4,500	4,343

### Dimensions

<b>Cyl. no.</b>		<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>A</b>	<b>mm</b>	6,340	6,870	7,400	7,930
<b>B</b>	<b>mm</b>	3,415	3,415	3,635	3,635
<b>C</b>	<b>mm</b>	9,755	10,285	11,035	11,565
<b>H</b>	<b>mm</b>	4,622	4,622	4,840	4,840
<b>Dry mass</b>	<b>t</b>	75.0	79.0	87.0	91.0
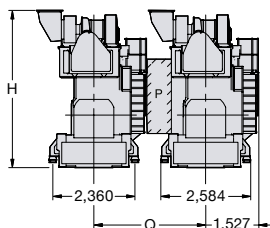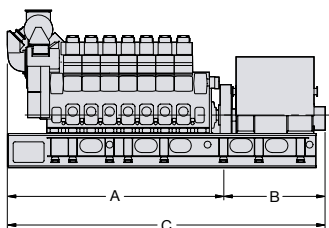
<sup>1)</sup> Based on nominal generator efficiencies of 96.5%


P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,835 mm (without gallery) ~3,220 mm (with gallery)

Bore 280 mm, Stroke 330 mm

Speed	r/min	1,000		900	
Frequency	Hz	50		60	
		Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
12PA6 B		4,440	4,307	4,200	4,074
16PA6 B		5,920	5,742	5,600	5,432
18PA6 B		6,660	6,460	6,300	6,111
20PA6 B		7,400	7,178	7,000	6,790

### Dimensions<sup>2)</sup>

Cyl. no.		12	16	18	20
A	mm	4,370	4,727	4,732	4,770
B	mm	4,600	5,637	6,097	6,557
C	mm	9,287	10,583	11,048	11,547
H	mm	3,695	3,695	3,695	3,695
E	mm	2,670	2,670	2,670	2,670
Dry mass <sup>3)</sup>	t	60	72	80	85


<sup>1)</sup> Nominal generator efficiencies: 97%

<sup>2)</sup> Dimensions are based on operation under inclination up to 25 degrees in any direction

<sup>3)</sup> Incl. 5% tolerance, weight may vary due to different configurations

Engine fuel: distillate according to ISO 8217 DMA and DMZ

Permissible overload of 10% for 1 hour every other 12 hours of operation

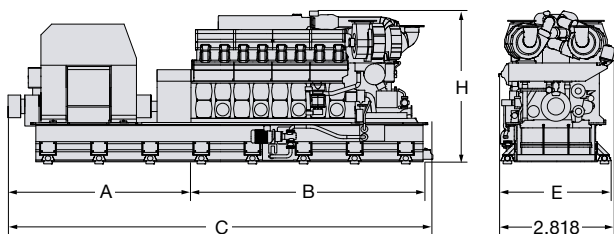

Tier III with SCR


**Bore:** 280 mm, **Stroke:** 320 mm

<b>Speed</b>	<b>r/min</b>	750	720
<b>Frequency</b>	<b>Hz</b>	50	60
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>5L28/32H</b>		1,100	1,045
<b>6L28/32H</b>		1,320	1,255
<b>7L28/32H</b>		1,540	1,465
<b>8L28/32H</b>		1,760	1,670
<b>9L28/32H</b>		1,980	1,880

### Dimensions

<b>Cyl. no.</b>		<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>A</b>	<b>mm</b>	4,279	4,759	5,499	5,979	6,199
<b>B</b>	<b>mm</b>	2,400	2,510	2,680	2,770	2,690
<b>C</b>	<b>mm</b>	6,679	7,269	8,179	8,749	8,889
<b>H</b>	<b>mm</b>	3,184	3,184	3,374	3,374	3,534
<b>Dry mass</b>	<b>t</b>	32.6	36.3	39.4	40.7	47.1

<sup>1)</sup> Based on nominal generator efficiencies of 95%

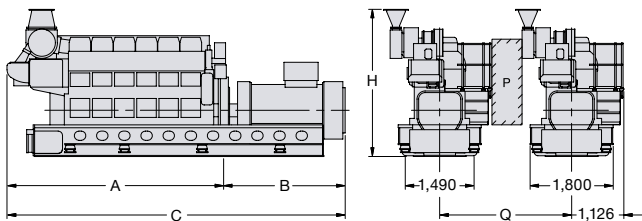

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,655 mm (without gallery) ~2,850 mm (with gallery)


**Bore:** 280 mm, **Stroke:** 320 mm

<b>Speed</b>	<b>r/min</b>	750		720	
<b>Frequency</b>	<b>Hz</b>	50		60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>5L28/32DF</b>		1,000	950	1,000	950
<b>6L28/32DF</b>		1,200	1,140	1,200	1,140
<b>7L28/32DF</b>		1,400	1,330	1,400	1,330
<b>8L28/32DF</b>		1,600	1,520	1,600	1,520
<b>9L28/32DF</b>		1,800	1,710	1,800	1,710

### Dimensions

<b>Cyl. no.</b>		<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>A</b>	<b>mm</b>	4,321	4,801	5,281	5,761	6,241
<b>B</b>	<b>mm</b>	2,400	2,510	2,680	2,770	2,690
<b>C</b>	<b>mm</b>	6,721	7,311	7,961	8,531	8,931
<b>H</b>	<b>mm</b>	2,835	3,009	3,009	3,009	3,009
<b>Dry mass</b>	<b>t</b>	32.6	36.3	39.4	40.7	47.1

<sup>1)</sup> Based on nominal generator efficiencies of 95%  
Gas methane number  $\geq 80$

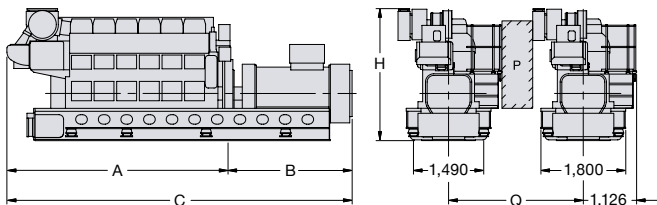

- P Free passage between the engines, width 600 mm and height 2,000 mm  
Q Minimum distance between centre of engines: ~2,655 mm (without gallery)  
~2,850 mm (with gallery)

Tier III with SCR



**Bore:** 270 mm, **Stroke:** 380 mm

<b>Speed</b>	<b>r/min</b>	750/720		750/720 (MDO <sup>1)</sup> /MGO)	
<b>Frequency</b>	<b>Hz</b>	50/60		50/60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>2)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>2)</sup></b>
<b>5L27/38</b>		1,600/1,500	1,535/ 1,440	-	-
<b>6L27/38</b>		1,980	1,900	2,100	2,015
<b>7L27/38</b>		2,310	2,220	2,450	2,355
<b>8L27/38</b>		2,640	2,535	2,800	2,690
<b>9L27/38</b>		2,970	2,850	3,150	3,025

### Dimensions

<b>Cyl. no.</b>		<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>A</b>	<b>mm</b>	4,346	4,791	5,236	5,681	6,126
<b>B</b>	<b>mm</b>	2,486	2,766	2,766	2,986	2,986
<b>C</b>	<b>mm</b>	6,832	7,557	8,002	8,667	9,112
<b>H</b>	<b>mm</b>	3,712	3,712	3,899	3,899	3,899
<b>Dry mass</b>	<b>t</b>	40.0	44.5	50.4	58.2	64.7

<sup>1)</sup> MDO viscosity must not exceed 6 mm<sup>2</sup>/s = cSt @ 40 °C
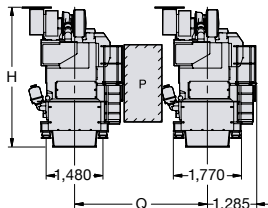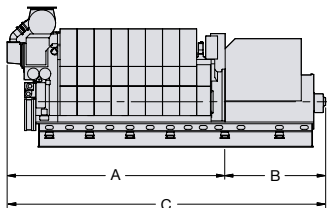
<sup>2)</sup> Based on nominal generator efficiencies of 96%


P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,900 mm (without gallery)  
~3,100 mm (with gallery).

**Bore:** 225 mm, **Stroke:** 300 mm

Speed	r/min	750		720		900	
Frequency	Hz	50		60		60	
		Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
5L23/30H Mk 3 ECR		-	-	500	475	-	-
5L23/30H Mk 3		885	840	850	810	-	-
6L23/30H Mk 3		1,062	1,010	1,020	970	1,200	1,140
7L23/30H Mk 3		1,239	1,180	1,190	1,130	1,400	1,330
8L23/30H Mk 3		1,416	1,345	1,360	1,290	1,600	1,520
9L23/30H Mk 3		1,593	1,515	1,530	1,455	1,800	1,710


### Dimensions (5-7 cylinder)

Cyl. no.		5	5	6	6	7	7
	r/min	720 ECR	720/750	720/750	900	720/750	900
A	mm	3,379	3,379	3,749	3,749	4,119	4,276
B	mm	2,202	2,202	2,252	2,252	2,302	2,302
C	mm	5,581	5,581	6,001	6,001	6,421	6,578
H	mm	2,621	2,621	2,621	2,621	2,621	2,621
Dry mass	t	16.8	16.8	18.4	18.6	20.7	20.7

### Dimensions (8-9 cylinder)

Cyl. no.		8	8	9	9
	r/min	720/750	900	720/750	900
A	mm	4,489	4,896	4,859	5,266
B	mm	2,352	2,352	2,402	2,402
C	mm	6,841	7,248	7,261	7,668
H	mm	2,621	2,621	2,621	2,621
Dry mass	t	22.5	22.6	24.5	24.5

<sup>1)</sup> Based on nominal generator efficiencies of 95%

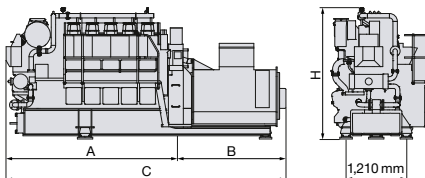

Free passage between the engines, width 600 mm and height 2,000 mm

Minimum distance between centre of engines: ~2,250 mm (without gallery) ~2,600 mm (with gallery)

Tier III with SCR

**Bore:** 225 mm, **Stroke:** 300 mm


<b>Speed</b>	<b>r/min</b>	750		720		900	
<b>Frequency</b>	<b>Hz</b>	50		60		60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>5L23/30H Mk 2 ECR</b>		525	500	525	500	-	-
<b>5L23/30H Mk 2</b>		675/740	640/705	650/710	620/675	-	-
<b>6L23/30H Mk 2</b>		888	845	852	810	1,050	1,000
<b>7L23/30H Mk 2</b>		1,036	985	994	945	1,225	1,165
<b>8L23/30H Mk 2</b>		1,184	1,125	1,136	1,080	1,400	1,330

### Dimensions

<b>Cyl. no.</b>		5	6	6	7	7	8	8
	<b>r/min</b>	720/750	720/750	900	720/750	900	720/750	900
<b>A</b>	<b>mm</b>	3,379	3,749	3,749	4,119	4,276	4,489	4,896
<b>B</b>	<b>mm</b>	2,202	2,252	2,252	2,302	2,302	2,352	2,352
<b>C</b>	<b>mm</b>	5,581	6,001	6,001	6,421	6,578	6,841	7,248
<b>H</b>	<b>mm</b>	2,621	2,621	2,621	2,621	2,621	2,621	2,621
<b>Dry mass</b>	<b>t</b>	16.8	18.4	18.6	20.7	20.7	22.5	22.6

<sup>1)</sup> Based on nominal generator efficiencies of 95%

Note: Part load optimised – approved and available

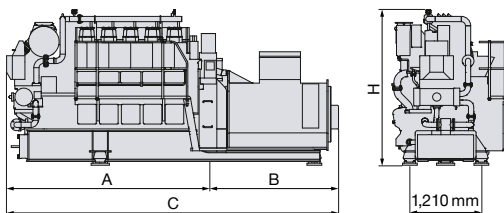

Free passage between the engines, width 600 mm and height 2,000 mm  
 Minimum distance between centre of engines: ~2,250 mm (without gallery) ~2,600 mm (with gallery)

**Bore:** 225 mm, **Stroke:** 300 mm

Speed	r/min	750		720		900	
	Hz	50		60		60	
		Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>	Eng. kW	Gen. kW <sup>1)</sup>
5L23/30DF		625	590	625	590	-	-
6L23/30DF		750	710	750	710	900	855
7L23/30DF		875	830	875	830	1,050	995
8L23/30DF		1,000	950	1,000	950	1,200	1,140

### Dimensions


Cyl. no.		5	6	6	7	7	8	8
	r/min	720/750	720/750	900	720/750	900	720/750	900
A	mm	3,469	3,839	3,839	4,209	4,276	4,579	4,896
B	mm	2,202	2,252	2,252	2,302	2,302	2,352	2,352
C	mm	5,671	6,091	6,091	6,511	6,578	6,931	7,241
H	mm	2,749	2,749	2,749	2,749	2,749	2,749	2,749
Dry mass	t	17.3	19.0	19.2	21.4	21.4	23.3	23.4

<sup>1)</sup> Based on nominal generator efficiencies of 95%.

Engine variants with 750 and 720 r/min are certified for compliance with IMO Tier III in the load range 20-100%.

Engine variants with 900 r/min have not been tested, and an SCR catalyst may be required to achieve compliance with IMO Tier III.

Gas methane number  $\geq 80$ .

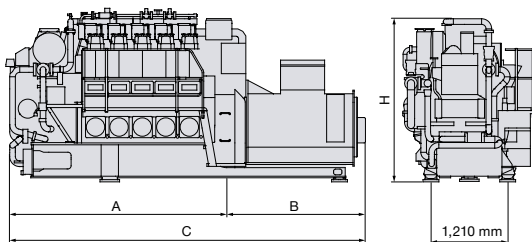

Free passage between the engines, width 600 mm and height 2,000 mm

Minimum distance between centre of engines: ~2,250 mm (without gallery) ~2,600 mm (with gallery)



**Bore:** 210 mm, **Stroke:** 310 mm



<b>Speed</b>	<b>r/min</b>	1,000		900	
<b>Frequency</b>	<b>Hz</b>	50		60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>5L21/31</b>		1,000	950	1,000	950
<b>6L21/31</b>		1,320	1,255	1,320	1,255
<b>7L21/31</b>		1,540	1,465	1,540	1,465
<b>8L21/31</b>		1,760	1,675	1,760	1,675
<b>9L21/31</b>		1,980	1,880	1,980	1,880

### Dimensions

<b>Cyl. no.</b>		<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>A</b>	<b>mm</b>	3,959	4,314	4,669	5,572	5,927
<b>B</b>	<b>mm</b>	1,870	2,000	1,970	2,110	2,135
<b>C</b>	<b>mm</b>	5,829	6,314	6,639	7,682	8,062
<b>H</b>	<b>mm</b>	3,183	3,183	3,289	3,289	3,289
<b>Dry mass</b>	<b>t</b>	22.5	26.0	29.5	33.0	36.5

<sup>1)</sup> Based on nominal generator efficiencies of 95%

Note: Part load optimised – approved and available

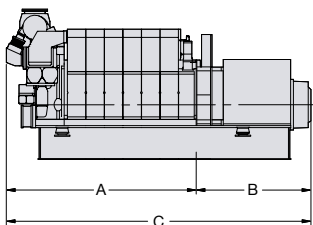

P Free passage between the engines, width 600 mm and height 2,000 mm

Q Minimum distance between centre of engines: ~2,400 mm (without gallery) ~2,600 mm (with gallery).

Tier III with SCR

**Bore:** 175 mm, **Stroke:** 215 mm

Engine model	Rating def.	kWm	kWe <sup>1)</sup>	rpm (freq.)	SFOC at 100% MCR Tier II/Tier III	SFOC at 75% MCR Tier II/Tier III
					g/kWh	g/kWh
<b>12V175D-MEM</b>	Diesel-electric	1,440	1,382	1,500 (50 Hz)	188/191	194/197
	medium duty	1,800	1,728	1,800 (60 Hz)	195/198	203/206
<b>12V175D-MEL</b>	Diesel-electric	1,620	1,555	1,500 (50 Hz)	188/191	193/196
	light duty	1,920	1,843	1,800 (60 Hz)	195/198	201/205
<b>12V175D-MA</b>	Auxiliary duty	1,620	1,555	1,500 (50 Hz)	188/191	193/196
		1,920	1,843	1,800 (60 Hz)	195/198	201/205

<sup>1)</sup> 3-phase, 0.8 p.f., assumes alternator efficiency of 96.0%.

SFOC figures related to mechanical output and for distillates according to ISO 8217 DMA, with attached lube oil, HT and LT-cooling water pumps.


### Rating definitions:

<b>Marine electric propulsion medium duty</b>	Average load: up to 75%
<b>Marine electric propulsion light duty</b>	Average load: up to 50%
<b>Marine auxiliary</b>	Average load: up to 50%

### Dimensions

<b>H</b>	<b>mm</b>	2,670
<b>Dry weight</b>	<b>t</b>	15.8

GenSet dimensions and weight shown are for guidance only. Details may vary due to different configurations.

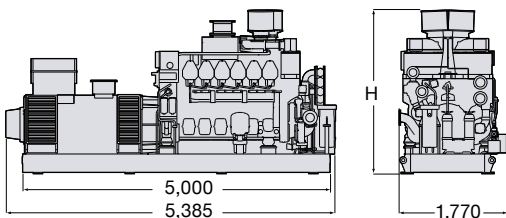

An aerial photograph of a ship's deck, showing a basketball court with yellow and red markings. The ship is moving through dark blue water, creating a white wake. The text is overlaid on the lower half of the image, which has a grey background.

# **S.E.M.T. Pielstick four-stroke propulsion engines**



**Bore:** 280 mm, **Stroke:** 330 mm

<b>Speed</b>	<b>r/min</b>	1,050
<b>mep</b>	<b>bar</b>	22.8
		<b>kW<sup>1)</sup></b>
<b>12PA6 B STC</b>		4,860
<b>16PA6 B STC</b>		6,480
<b>20PA6 B STC</b>		8,100

### Specific Fuel Oil Consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>PA6 B STC</b>	<b>2)</b>	<b>2)</b>

### Dimensions


<b>Cyl. No.</b>		<b>12</b>	<b>16</b>	<b>20</b>
<b>L</b>	<b>mm</b>	5,830	6,780	7,960
<b>W</b>	<b>mm</b>	2,340	2,340	2,640
<b>H</b>	<b>mm</b>	3,124	3,124	3,166
<b>Dry mass</b>	<b>t</b>	31	37	43

Engine fuel: distillate according to ISO 8217 DMA

Engine rating: engine rating according to ISO 3046 conditions

<sup>1)</sup> 110% load for one in six operating hours on navy vessels, with approval according to HSRV from DNV, available on special request

<sup>2)</sup> SFOC values are project specific. Please contact MAN Energy Solutions for further information.

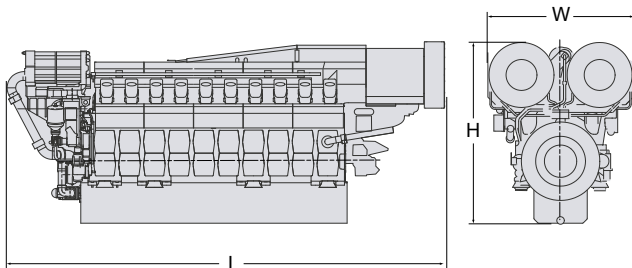

Tier III with SCR

GenSet for electric propulsion.

**Bore** 280 mm, **Stroke** 330 mm

<b>Speed</b>	<b>r/min</b>	<b>1,000</b>		<b>900</b>	
<b>Frequency</b>	<b>Hz</b>	50		60	
		<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>	<b>Eng. kW</b>	<b>Gen. kW<sup>1)</sup></b>
<b>12PA6 B</b>		4,440	4,307	4,200	4,074
<b>16PA6 B</b>		5,920	5,742	5,600	5,432
<b>18PA6 B</b>		6,660	6,460	6,300	6,111
<b>20PA6 B</b>		7,400	7,178	7,000	6,790

### Dimensions<sup>2)</sup>

<b>Cyl. No.</b>		<b>12</b>	<b>16</b>	<b>18</b>	<b>20</b>
<b>A</b>	<b>mm</b>	4,370	4,727	4,732	4,770
<b>B</b>	<b>mm</b>	4,600	5,637	6,097	6,557
<b>C</b>	<b>mm</b>	9,287	10,583	11,048	11,547
<b>H</b>	<b>mm</b>	3,695	3,695	3,695	3,695
<b>E</b>	<b>mm</b>	2,670	2,670	2,670	2,670
<b>Dry mass<sup>3)</sup></b>	<b>t</b>	60	72	80	85


<sup>1)</sup> Nominal generator efficiencies: 97%

<sup>2)</sup> Dimensions are based on operation under inclination up to 25 degrees in any direction

<sup>3)</sup> Incl. 5% tolerance, weight may vary due to different configurations

Engine fuel: distillate according to ISO 8217 DMA and DMZ

Permissible overload of 10% for 1 hour every other 12 hours of operation

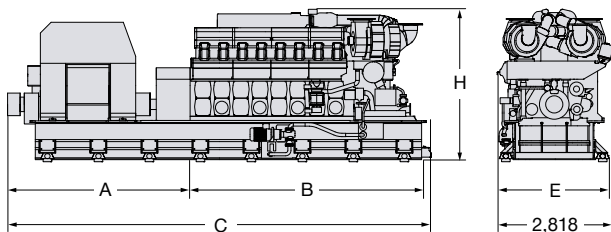

**Bore:** 400 mm, **Stroke:** 500 mm

<b>Speed</b>	<b>r/min</b>		600
<b>mep</b>	<b>bar</b>		23.9
			<b>kW</b>
<b>12PC2.6 B</b>			9,000
<b>14PC2.6 B</b>			10,500
<b>16PC2.6 B</b>			12,000


### Specific Fuel Oil Consumption (SFOC) to ISO conditions

<b>MCR</b>	<b>100%</b>	<b>85%</b>
<b>PC2.6 B</b>	<sub>- 1)</sub>	<sub>- 1)</sub>

### Dimensions

<b>Cyl. No.</b>		<b>12</b>	<b>14</b>	<b>16</b>
<b>L</b>	<b>mm</b>	9,100	9,840	10,580
<b>L<sub>1</sub></b>	<b>mm</b>	5,960	6,700	7,440
<b>W</b>	<b>mm</b>	3,780	3,780	3,780
<b>H</b>	<b>mm</b>	4,800	4,800	4,800
<b>Dry mass</b>	<b>t</b>	94	104	114

<sup>1)</sup> SFOC values are project specific. Please contact MAN Energy Solutions for further information.

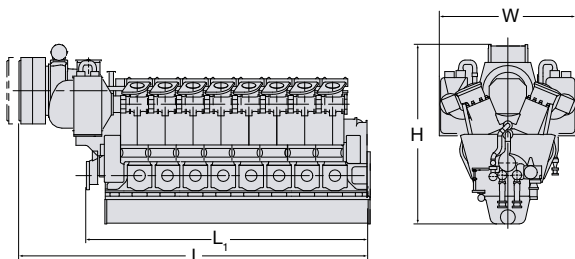





# **Four-stroke propulsion systems**



## Propeller programme – FPP and CPP

### The MAN Alpha FPP portfolio covers:

- power range of 4-40 MW per shaft
- blade configurations for 3, 4, 5 and 6-bladed propellers
- propellers with integrated shaft line and stern tube solutions
- a wide range of stern tube lube and sealing systems
  - oil, water, biodegradable oils

### The MAN Alpha FPPs are characterised by the following benefits:



- High-efficient hydrodynamically optimised blade profiles
  - Kappel designs available
- High reliability: robust approach with ample mechanical design margins
- High-efficient aft ship integration with rudder, rudder bulb, ducts, etc.
- Layouts for complete propulsion systems
- Plant calculations with upfront consideration to torsional vibration calculation (TVC), alignment and control systems

### MAN Alpha controllable pitch propeller

- As standard Mk 5 versions are 4-bladed – optionally 3- and 5-bladed propellers are available on request
- The figures stated after VBS indicate the propeller hub diameter
- Standard blade/hub materials are Ni-Al-bronze, stainless steel is optional
- The propellers are available up to the highest ice classes. However the standard programme, is based on ‘no ice’

# Standard programme

Propeller diameter (mm)

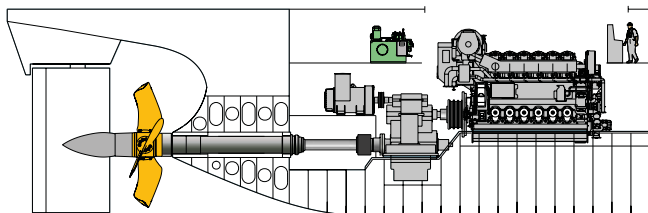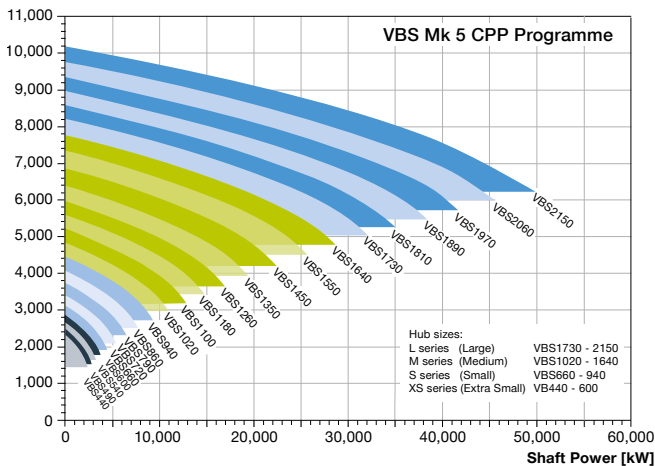

Four-stroke propulsion system installation – complete powertrain with propeller and aft ship equipment MAN Alpha Kappel propeller – four-bladed CP with fairing cone for rudder bulb

# MAN standard package examples


Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>L51/60DF</b>										
6	6,900	162	4,400	1,100	851	920				
6	6,900	133	5,000	1,180	914	989				
6	6,900	103	5,850	1,350	1,037	1,096				
7	8,050	160	4,550	1,180	914	989				
7	8,050	133	5,150	1,260	975	1,036				
7	8,050	104	6,000	1,450	1,114	1,148				
8	9,200	157	4,700	1,180	914	989				
8	9,200	132	5,300	1,350	1,037	1,096				
8	9,200	103	6,200	1,450	1,114	1,148				
9	10,350	155	4,850	1,260	975	1,036				
9	10,350	131	5,450	1,350	1,037	1,096				
9	10,350	102	6,400	1,550	1,175	1,213				
<b>V48/60CR</b>										
12	14,400	160	4,950	1,350	1,037	1,096	1,800	2,620		26.7
12	14,400	130	5,600	1,450	1,114	1,163	1,850	2,770		33.2
12	14,400	100	6,600	1,640	1,260	1,256	1,900	3,140		42.2
14	16,800	160	5,100	1,450	1,114	1,163	1,850	2,775		31.7
14	16,800	130	5,850	1,550	1,187	1,208	1,900	2,905		38.1
14	16,800	100	6,850	1,730	1,330	1,307	1,950	3,355		48.5
16	19,200	160	5,260	1,450	1,114	1,163	1,850	2,805		32.9
16	19,200	130	6,050	1,640	1,260	1,256	1,950	3,155		43.9
16	19,200	100	7,100	1,730	1,330	1,367	2,000	3,455		56.3
18	21,600	160	5,400	1,550	1,187	1,213	1,900	2,905		37.3
18	21,600	130	6,200	1,640	1,260	1,266	1,950	3,155		45.5
18	21,600	100	7,300	1,810	1,390	1,420	2,000	3,655		61.4

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>L48/60CR</b>										
6	7,200	172	4,250	1,100	851	970	1,700			19.1
6	7,200	143	4,800	1,180	914	989	1,700			23.0
6	7,200	112	5,600	1,350	1,037	1,096	1,700			29.9
7	8,400	169	4,400	1,100	851	995	1,700			21.4
7	8,400	141	5,000	1,260	975	1,036	1,700			26.4
7	8,400	110	5,850	1,350	1,037	1,096	1,750			32.3
8	9,600	166	4,550	1,180	914	989	1,700			24.2
8	9,600	139	5,150	1,260	975	1,036	1,700			28.2
8	9,600	110	6,000	1,450	1,114	1,148	1,800			37.9
9	10,800	163	4,700	1,260	975	1,036	1,700			27.2
9	10,800	137	5,300	1,350	1,037	1,096	1,800			33.2
9	10,800	108	6,200	1,450	1,114	1,163	1,800			40.2

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

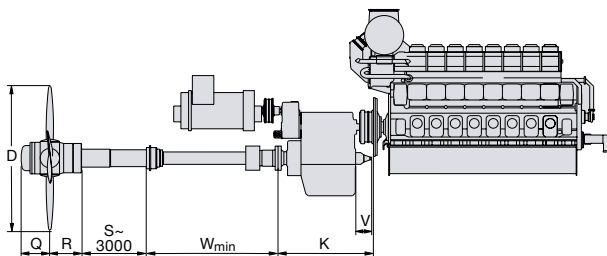

# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>V48/60B</b>										
12	13,800	162	4,950	1,350	1,027	1,100	1,800		876	31.5
12	13,800	135	5,600	1,450	1,122	1,197	1,900		876	39.0
12	13,800	106	6,600	1,640	1,260	1,256	1,900		876	51.2
14	16,100	163	5,100	1,450	1,122	1,197	1,800		876	36.6
14	16,100	131	5,850	1,550	1,175	1,225	1,900		876	45.4
14	16,100	99	6,850	1,730	1,330	1,339	1,950		TBS	55.8
16	18,400	162	5,250	1,450	1,122	1,197	1,900		876	39.2
16	18,400	129	6,050	1,550	1,175	1,225	1,950		876	50.0
16	18,400	97	7,100	1,810	1,390	1,300	2,000		TBS	61.0
18	20,700	161	5,400	1,550	1,175	1,225	1,900		876	44.7
18	20,700	128	6,200	1,640	1,260	1,256	1,950		876	54.7
18	20,700	96	7,300	1,890	1,450	1,370	2,000		TBS	63.3

<b>L48/60B</b>										
6	6,900	170	4,250	1,100	851	920	1,700		739	18.5
6	6,900	142	4,800	1,180	914	1,004	1,700		739	22.5
6	6,900	111	5,600	1,350	1,027	1,096	1,700		876	28.9
7	8,050	167	4,400	1,100	851	945	1,700		739	20.7
7	8,050	139	5,000	1,260	972	1,036	1,700		739	25.7
7	8,050	109	5,850	1,350	1,027	1,035	1,750		876	31.6
8	9,200	165	4,550	1,180	914	1,004	1,700		739	23.2
8	9,200	138	5,150	1,260	972	1,036	1,700		739	27.2
8	9,200	109	6,000	1,450	1,122	1,197	1,800		876	36.6
9	10,350	162	4,700	1,260	972	1,036	1,700		739	25.9
9	10,350	136	5,300	1,350	1,027	1,096	1,750		876	31.0
9	10,350	107	6,200	1,450	1,122	1,163	1,800		876	39.1

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube


# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>V45/60CR</b>										
12	15,600	161	5,100	1,450	1,122	1,197	1,800			
12	15,600	133	5,750	1,550	1,175	1,236	1,900			
12	15,600	106	6,750	1,640	1,260	1,288	1,950			
14	18,200	164	5,200	1,450	1,122	1,227	1,800			
14	18,200	131	5,950	1,550	1,175	1,256	1,900			
14	18,200	104	7,000	1,730	1,330	1,339	3,000			

## L35/44DF

6	3,180	208	3,300	790	600	692	1,400			6.4
6	3,180	167	3,800	940	714	886	1,530			8.7
6	3,180	130	4,400	1,020	775	896	1,530			10.9
7	3,710	198	3,500	860	653	750	1,530			7.9
7	3,710	161	4,000	940	714	886	1,530			9.5
7	3,710	128	4,600	1,100	836	1,001	1,560			12.7
8	4,240	197	3,600	860	653	750	1,530			8.4
8	4,240	165	4,050	940	714	886	1,530			10.0
8	4,240	127	4,750	1,100	836	1,001	1,560			13.6
9	4,770	202	3,600	940	714	886	1,530			9.3
9	4,770	167	4,100	1,020	775	896	1,560			11.9
9	4,770	130	4,800	1,100	836	1,001	1,630			14.7
10	5,300	199	3,700	940	714	886	1,560			10.2
10	5,300	166	4,200	1,020	775	896	1,560			12.5
10	5,300	126	5,000	1,180	897	1,004	1,630			16.8

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

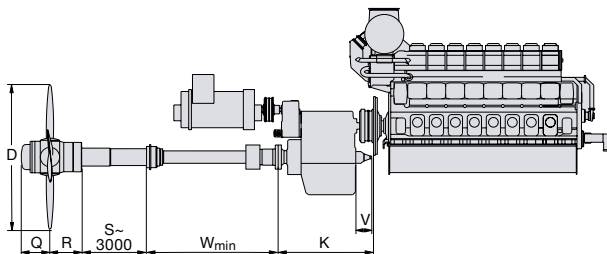

# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>V32/44CR</b>										
12	7,200	207	3,800	1,020	795	879	1,650			14.4
12	7,200	167	4,400	1,100	851	920	1,700			17.4
12	7,200	128	5,250	1,260	975	1,036	1,700			22.9
14	8,120	202	3,950	1,020	795	879	1,650			15.2
14	8,120	164	4,550	1,180	914	989	1,700			19.7
14	8,120	127	5,400	1,260	975	1,036	1,700			24.4
16	9,600	205	4,050	1,100	851	945	1,700			18.1
16	9,600	165	4,650	1,180	914	989	1,700			21.8
16	9,600	127	5,550	1,350	1,037	1,096	1,750			28.2
18	10,800	205	4,150	1,180	914	989	1,700			20.2
18	10,800	164	4,750	1,260	975	1,036	1,700			24.2
18	10,800	126	5,700	1,450	1,114	1,148	1,800			32.7
20	12,000	204	4,250	1,180	914	989	1,700			21.2
20	12,000	163	4,850	1,260	975	1,036	1,750			25.8
20	12,000	124	5,850	1,450	1,114	1,163	1,800			34.7

## L32/44CR

6	3,600	206	3,350	860	653	750	1,400			8.9
6	3,600	170	3,800	940	714	886	1,520			10.4
6	3,600	130	4,450	1,020	775	896	1,520			12.4
7	4,060	202	3,500	860	653	750	1,520			9.7
7	4,060	168	3,950	940	714	886	1,520			11.2
7	4,060	131	4,600	1,100	836	1,001	1,550			14.3
8	4,800	199	3,600	940	714	886	1,520			10.9
8	4,800	167	4,050	1,020	775	896	1,520			12.5
8	4,800	129	4,750	1,100	836	1,001	1,630			16.2
9	5,400	200	3,650	940	714	886	1,520			11.3
9	5,400	166	4,150	1,020	775	896	1,550			13.6
9	5,400	128	4,900	1,180	897	1,004	1,630			17.9
10	6,000	201	3,700	940	714	886	1,550			12.3
10	6,000	164	4,250	1,020	775	896	1,630			15.1
10	6,000	128	5,000	1,180	897	1,004	1,650			18.9

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube


# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>V32/40</b>										
12	6,000	187	3,950	1,020	775	896	1,560			15.2
12	6,000	159	4,400	1,100	836	970	1,630			18.3
12	6,000	128	5,050	1,180	914	989	1,700			22.6
14	7,000	183	4,100	1,020	775	901	1,630			17.1
14	7,000	158	4,550	1,100	836	970	1,650			19.8
14	7,000	127	5,250	1,260	975	1,036	1,700			26.1
16	8,000	183	4,200	1,100	836	970	1,650			19.3
16	8,000	155	4,700	1,180	914	989	1,700			23.6
16	8,000	126	5,400	1,260	975	1,036	1,700			27.8
18	9,000	181	4,300	1,100	836	995	1,700			21.0
18	9,000	153	4,850	1,260	975	1,036	1,700			26.2
18	9,000	123	5,600	1,350	1,037	1,096	1,740			31.6

## L32/40

6	3,000	205	3,300	790	639	692	1,400			8.8
6	3,000	171	3,700	860	653	745	1,400			9.9
6	3,000	137	4,200	940	714	886	1,520			12.0
7	3,500	199	3,450	860	653	745	1,400			9.8
7	3,500	168	3,850	940	714	886	1,520			11.8
7	3,500	134	4,400	1,020	775	896	1,520			13.9
8	4,000	198	3,550	860	653	745	1,400			10.3
8	4,000	165	4,000	940	714	906	1,520			12.5
8	4,000	133	4,550	1,100	836	1,001	1,560			16.3
9	4,500	195	3,650	940	714	906	1,520			12.2
9	4,500	164	4,100	1,020	775	896	1,520			14.1
9	4,500	134	4,650	1,100	836	1,006	1,560			17.1

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube

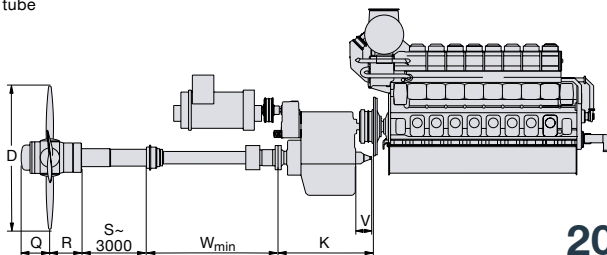

# MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>V28/33D STC</b>										
12	6,000	187	3,700	940	735	828	1,600			10.9
12	6,000	155	4,000	1,020	795	879	1,650			13.1
12	6,000	140	4,300	1,100	851	920	1,650			14.5
16	8,000	211	3,700	1,020	795	879	1,650			13.1
16	8,000	184	4,000	1,100	851	920	1,650			14.7
16	8,000	159	4,300	1,100	851	945	1,700			16.2
20	10,000	228	3,700	1,100	851	920	1,650			14.6
20	10,000	199	4,000	1,100	851	945	1,700			16.3
20	10,000	176	4,300	1,180	914	989	1,700			18.3

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 6,000 mm propeller shaft and 3,000 mm stern tube


<b>L27/38</b>										
6	2,040	258	2,650	660	501	631	1,320			4.9
6	2,040	218	2,950	720	547	650	1,350			5.7
6	2,040	191	3,200	790	639	692	1,350			6.6
6	2,040	163	3,500	790	639	692	1,350			7.0
6	2,040	152	3,650	860	653	745	1,350			7.8
7	2,380	247	2,800	720	547	513	1,350			5.7
7	2,380	211	3,100	720	547	513	1,350			6.1
7	2,380	186	3,350	790	639	692	1,350			7.0
7	2,380	161	3,650	860	653	745	1,400			8.1
7	2,380	150	3,800	860	653	745	1,400			8.4
8	2,720	242	2,900	720	547	513	1,350			6.1
8	2,720	209	3,200	790	639	692	1,350			6.9
8	2,720	186	3,450	790	639	692	1,400			7.5
8	2,720	173	3,600	860	653	745	1,400			8.3
8	2,720	147	3,950	940	714	886	1,400			9.7
9	3,060	243	2,950	720	547	513	1,350			6.3
9	3,060	206	3,300	790	639	692	1,400			7.5
9	3,060	184	3,550	860	653	745	1,400			8.5
9	3,060	172	3,700	860	653	745	1,400			8.7
9	3,060	147	4,050	940	714	886	1,530			10.5

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 4,000 mm propeller shaft and 2,000 mm stern tube for 21/31, 27/38 and 6,000 mm propeller shaft and 3,000 mm stem tube for the other types

## MAN standard package examples

Cyl.	kW	Prop. speed r/min	D mm	Hub VBS mm	Q mm	R mm	Wmin mm	K mm	V mm	Prop. mass t <sup>1)</sup>
<b>L21/31</b>										
6	1,290	274	2,350	600	456	566	1,320			3.8
6	1,290	232	2,600	600	456	566	1,320			4.1
6	1,290	205	2,800	660	501	631	1,320			4.4
6	1,290	181	3,000	660	501	631	1,320			4.7
7	1,505	260	2,500	600	456	566	1,320			4.1
7	1,505	223	2,750	660	501	631	1,320			4.6
7	1,505	198	2,950	660	501	631	1,320			4.8
7	1,505	176	3,150	720	547	650	1,320			5.4
8	1,720	261	2,550	600	456	581	1,320			4.4
8	1,720	219	2,850	660	501	631	1,320			4.8
8	1,720	196	3,050	720	547	650	1,320			5.1
8	1,720	176	3,250	720	547	650	1,350			5.6
9	1,935	262	2,600	660	501	631	1,320			4.7
9	1,935	221	2,900	720	547	650	1,320			5.4
9	1,935	199	3,100	720	547	650	1,350			5.9
9	1,935	188	3,200	720	547	650	1,350			6.0

<sup>1)</sup> S<sub>min</sub> and propeller mass are based on 4,000 mm propeller shaft and 2,000 mm stern tube for 21/31, 27/38 and 6,000 mm propeller shaft and 3,000 mm stem tube for the other types

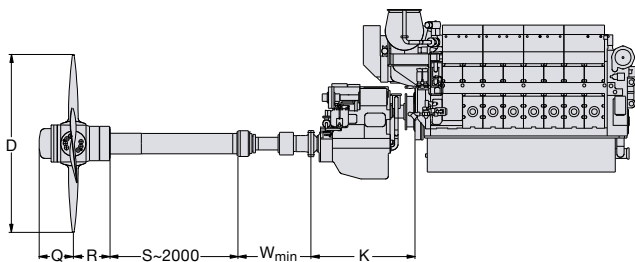


# MAN Alpha FPP solutions for MAN 175D

Engine rating <sup>1)</sup>	Engine power	Engine speed	Propeller speed	Propeller diameter	Propeller 4-bladed	Shaft diameter	Design speed
12V175D	kW	r/min	r/min	mm	type	mm	knots
MH	1,740	1,800	884	1,300	FPP	175	25
MH	1,740	1,800	702	1,400	FPP	175	25
MH	1,740	1,800	620	1,450	FPP	175	25
MH	1,740	1,800	523	1,600	FPP	175	25
MH	1,740	1,800	450	1,750	FPP	175	20
MH	1,740	1,800	400	1,850	FPP	205	20
MH	1,740	1,800	360	2,000	FPP	205	20
MH	1,740	1,800	331	2,100	FPP	205	20
MH	1,740	1,800	302	2,250	FPP	205	15
MH	1,740	1,800	288	2,300	FPP	205	15
MH	1,740	1,800	261	2,450	FPP	225	15
MH	1,740	1,800	247	2,500	FPP	225	15
MM	2,220	1,900	741	1,300	FPP	175	25
MM	2,220	1,900	654	1,450	FPP	175	25
MM	2,220	1,900	552	1,550	FPP	205	25
MM	2,220	1,900	475	1,750	FPP	205	20
MM	2,220	1,900	422	1,850	FPP	205	20
MM	2,220	1,900	380	2,000	FPP	205	20
MM	2,220	1,900	350	2,100	FPP	205	20
MM	2,220	1,900	319	2,200	FPP	225	15
MM	2,220	1,900	304	2,250	FPP	225	15
MM	2,220	1,900	275	2,500	FPP	225	15

<sup>1)</sup> Engine rating designations: MH = Marine 'Heavy Duty' and MM = Marine 'Medium Duty'

Propellers for the MAN 12V175D engines are optimized for a diesel-mechanical twin screw vessel operating at 85% engine rating. The standard propeller programme is dimensioned according to Lloyd's Register No Ice.

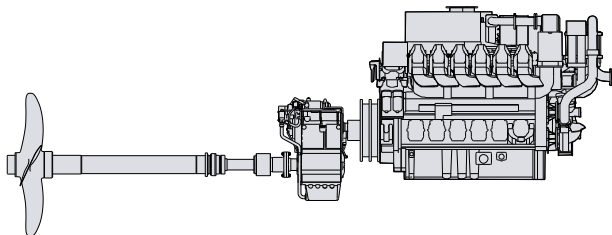


## MAN Alpha CPP solutions for MAN 175D

Engine rating <sup>1)</sup>	Engine power	Engine speed	Propeller speed	Propeller diameter	Propeller hub diam.	Shaft diameter	Design speed
12V175D	kW	r/min	r/min	mm	mm	mm	knots
MH	1,740	1,800	884	1,250	440	175	25
MH	1,740	1,800	702	1,350	440	175	25
MH	1,740	1,800	620	1,450	440	175	25
MH	1,740	1,800	523	1,600	490	175	25
MH	1,740	1,800	450	1,750	490	175	20
MH	1,740	1,800	400	1,850	490	205	20
MH	1,740	1,800	360	2,000	540	205	20
MH	1,740	1,800	331	2,100	540	205	20
MH	1,740	1,800	302	2,200	540	205	15
MH	1,740	1,800	288	2,300	600	205	15
MH	1,740	1,800	261	2,450	600	225	15
MH	1,740	1,800	247	2,500	600	225	15
MM	2,220	1,900	741	1,350	440	175	25
MM	2,220	1,900	654	1,450	440	175	25
MM	2,220	1,900	552	1,550	490	205	25
MM	2,220	1,900	475	1,750	490	205	20
MM	2,220	1,900	422	1,850	540	205	20
MM	2,220	1,900	380	2,000	540	205	20
MM	2,220	1,900	350	2,100	600	205	20
MM	2,220	1,900	319	2,250	600	225	15
MM	2,220	1,900	304	2,300	600	225	15
MM	2,220	1,900	275	2,500	660	225	15


<sup>1)</sup> Engine rating designations: MH = Marine 'Heavy Duty' and MM = Marine 'Medium Duty'

Propellers for the MAN 12V175D engines are optimized for a diesel-mechanical twin screw vessel operating at 85% engine rating. The standard propeller programme is dimensioned according to Lloyd's Register No Ice.

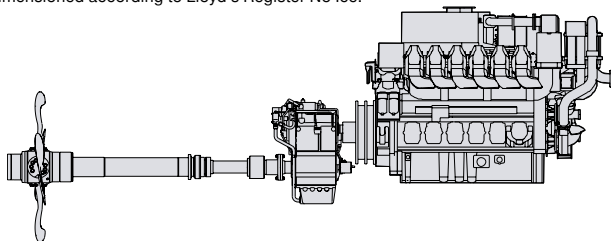

# Alphatronic 3000 propulsion control system

A high number of various FPP and CPP propulsion package applications are controlled by the Alphatronic 3000 system – customised for combinations of MAN medium and high speed engines in a wide range of diesel-mechanical, hybrid or electric propulsion setups.

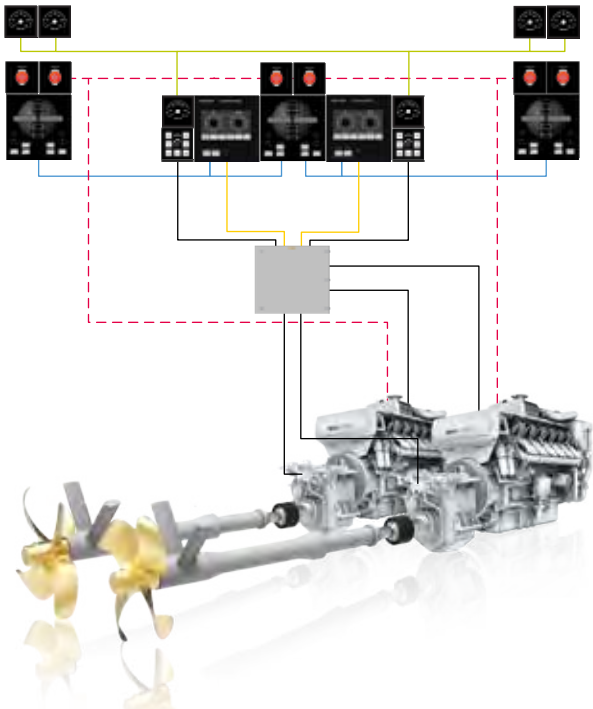

Simple system architecture for a straightforward twin MAN 175D FPP plant

Alphatronic 3000 at your finger tips: Safe and accurate propulsion control all the way – from the navigator's finger tips to the propeller tips. Any manoeuvring order given is translated into electrical speed setting-, pitch- or clutch signals, governing the hydraulic servo circuits of the gearbox and propeller system. Swift and reliable vessel manoeuvres are ensured due to quick and stable system response.





# MAN turbochargers and exhaust gas systems



## **MAN turbochargers and exhaust gas systems**

MAN Energy Solutions has a long and successful track record in the development of exhaust gas turbochargers for low, medium and high-speed diesel and gas engines. Drawing on its unrivalled expertise in the design and manufacture of this crucial engine component, MAN Energy Solutions can offer you world-leading technology that helps you maximise the efficiency of your operations.

MAN turbochargers are designed to deliver peak performance throughout their working lives – in some of the harshest conditions encountered anywhere in the world. This is achieved by combining three elements: simplicity, flexibility and reliability. For example, we develop and build our turbochargers to make installation, operation, servicing and maintenance as easy and efficient as possible. This reduces your initial capital investment and results in lower lifecycle costs.

### **Applications**

- Marine propulsion
- Marine GenSets
- Power generation
- Construction
- Mining
- Off-road vehicles
- Locomotives
- Industrial
- Offshore
- Mechanical drives

## Technical data

<b>Turbine type</b>	Axial flow turbine
<b>Max. permissible temp.</b>	520 °C
<b>Pressure ratio</b>	up to 4.7
<b>Optimised for IMO Tier III</b>	

## Supercharged engine output

Type	kW	Mass kg
<b>TCT30</b>	7,500	1,820
<b>TCT40</b>	9,460	2,500
<b>TCT50</b>	12,000	3,455
<b>TCT60</b>	15,120	4,735
<b>TCT70</b>	19,040	6,480
<b>TCT80</b>	24,030	8,890

Specific air consumption (Ie) 7.5 kg/kWh



# MAN TCA Series

## Technical data

<b>Turbine type</b>	Axial flow turbine
<b>Max. permissible temp.</b>	500 °C two-stroke / 650 °C four-stroke
<b>Pressure ratio</b>	up to 5.5
<b>Suitable for HFO, MDO, gas</b>	

## Turbocharger programme

Type	Max. supercharged engine output kW		Max. permissible	Mass
	Two-stroke le* = 7.5 kg/kWh	Four-stroke le* = 6.5 kg/kWh	Speed rpm	
<b>TCA33</b>	-	5,400	27,800	1,370
<b>TCA44</b>	7,400	7,900	22,500	1,950
<b>TCA55</b>	10,200	10,400	20,000	3,200
<b>TCA66</b>	14,600	14,800	16,900	5,300
<b>TCA77</b>	20,700	21,000	14,200	8,330
<b>TCA88</b>	32,400	30,000	12,000	14,000

\* Specific air consumption



## Technical data

<b>Turbine type</b>	Radial flow turbine
<b>Max. permissible temp.</b>	650 °C
<b>Pressure ratio</b>	up to 5.4
<b>Suitable for HFO, MDO, gas</b>	

## Turbocharger programme

Type	Max. supercharged engine output kW		Max. permissible	Mass
	Two-stroke le* = 7.0 kg/kWh	Four-stroke le* = 6.5 kg/kWh	Speed rpm	
<b>TCR10</b>	-	600	85,000	50
<b>TCR12</b>	-	880	70,900	100
<b>TCR14</b>	-	1,300	58,700	110
<b>TCR16</b>	-	1,850	48,800	180
<b>TCR18</b>	2,700	2,750	40,300	300
<b>TCR20</b>	4,000	4,000	33,400	500
<b>TCR22</b>	7,000	6,850	25,600	1,050

\* Specific air consumption






## Technical data

<b>Turbine type</b>	Radial flow turbine
<b>Max. permissible temp.</b>	650 °C (opt. 720 °C)
<b>Pressure ratio</b>	up to 4.5
<b>Suitable for HFO, MDO, gas</b>	

## Turbocharger programme

	<b>Max. supercharged engine output</b>	<b>Max. permissible speed</b>	<b>Mass</b>
<b>Type</b>	<b>kW</b>	<b>rpm</b>	<b>kg</b>
<b>NR12/S</b>	670	75,000	155
<b>NR14/S</b>	950	64,000	190
<b>NR17/S</b>	1,350	52,600	260
<b>NR20/S</b>	1,870	44,700	350
<b>NR24/S</b>	2,690	37,300	505
<b>NR29/S</b>	3,820	31,300	780
<b>NR34/S</b>	5,400	26,300	1,450

Specific air consumption  $l_e = 7 \text{ kg/kWh}$

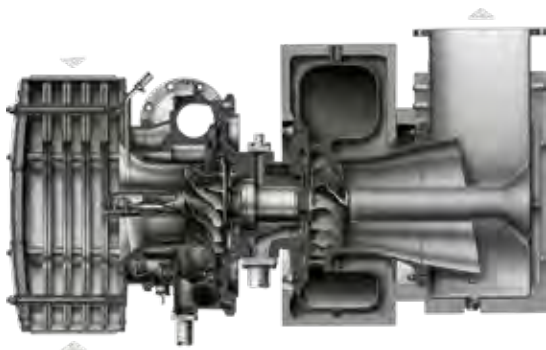

# MAN ECOCHARGE

## Market leader in two-stage turbocharging

MAN ECOCHARGE two-stage turbocharging is suitable for high and medium-speed engines of all fuel types and for application in all engine power ranges. Extremely high efficiencies and pressure ratios enable increased power density and improved key engine parameters. For example, it is possible to use a smaller engine for the same required power output or to achieve lower NO<sub>x</sub> emissions and lower specific fuel oil consumptions (SFOC).

As a compact two-stage unit, the MAN ECOCHARGE delivers outstanding turbocharging efficiency. A variety of product types and sizes are available, ensuring the perfect turbocharger-to-engine-fit. MAN ECOCHARGE always consists of a clever combination of high and low-pressure turbochargers. While MAN TCX has been specifically designed for high-pressure applications, MAN TCA and MAN TCR as well as our new MAN TCT generation series round up the package as low-pressure turbochargers.



## Technical data

<b>Turbine type</b>	Mixed flow turbine
<b>Max. permissible temp.</b>	650 °C
<b>Pressure ratio (two stages)</b>	up to 10.5
<b>Suitable for HFO, MDO, gas</b>	

## TCX turbocharger programme

<b>Type</b>	<b>Max. engine output*</b> <b>kW</b>	<b>Max. permissible speed</b> <b>rpm</b>	<b>Mass</b> <b>kg</b>
<b>TCX17</b>	8,500	40,980	470
<b>TCX19</b>	11,900	34,550	785
<b>TCX21</b>	16,900	29,000	1,325
<b>TCX23</b>	23,900	24,390	2,230

\* le = 6 kg/kWh; p<sub>HPCin</sub> = 3 bar; TH<sub>PCin</sub> = 45 °C



# MAN ETB

## MAN's EGR Blower series – Electrical Turbo Blower (ETB)

Specifically designed for EGR systems the MAN ETB plays an important role in enabling these systems to reach IMO Tier III emission limitation. The EGR blower is a core component of MAN Energy Solutions' high-pressure EGR system that raises the exhaust-gas pressure in order to overcome the pressure difference between exhaust gas and scavenging receiver. In addition the recirculated exhaust gas amount is controlled during the EGR operation by varying the blower speed.

The desired EGR operating conditions are achieved by using a high-speed electric motor, directly coupled to the compressor wheel and speed controlled by a frequency converter. The scope of supply consists of the ETB and one cabinet with frequency converter and sine wave filter.

The MAN ETB features a high-efficient blower wheel, optimized for the low-pressure ratios necessary for the high pressure EGR system of a two-stroke diesel engine with materials designed to withstand corrosive agents caused by Sulphur content fuels. As such MAN's ETB is suitable for high-pressure EGR engines of all fuel types and in all application ranges.



## Technical data

Type	Max. blower speed	Mass of blower
	rpm	kg
<b>ETB40</b> <sup>1)</sup>	9,200	1,860
<b>ETB30</b> <sup>2)</sup>	14,000	1,200

<sup>1)</sup> Available

<sup>2)</sup> Coming up soon

With ETB30 and ETB40 the MAN two-stroke engine portfolio can be covered with just two frame sizes.

The maximum engine power output with one ETB depends on the EGR volume flow and the pressure difference between exhaust gas and scavenging receiver. Therefore an EGR blower selection tool will be introduced and the output will be available in CEAS soon.

For more information and blower assignment, please contact [turboschargers@man-es.com](mailto:turboschargers@man-es.com).

## ETB – explicitly designed for EcoEGR

MAN's ETB is explicitly designed for EcoEGR applications where the blower will run continuously in both Tier III and Tier II Eco mode. This results in a compact and cost optimized design with highest availability.

In Tier II Eco mode the EGR volume flow is approx. 50% of the required volume flow in Tier III mode. To cover the operating points of both running modes MAN's ETB features an extremely wide compressor map.



The ETB achieves benchmark efficiencies and therefore the operational costs are minimized.

For more information about EcoEGR see the section EcoEGR in the MAN B&W two-stroke propulsion engines chapter.

# MAN SCR-HP

## Dimensions

Cluster	Reactor diameter	Reactor length	Reactor length
		< 0.1% sulphur	< 3.5% sulphur
	mm	mm	mm
1	1,900	3,500	4,500
2	2,300	3,800	4,800
3	2,800	4,000	5,000
4	3,100	4,200	5,200
5	3,800	4,800	5,800
6	4,500	5,400	6,400

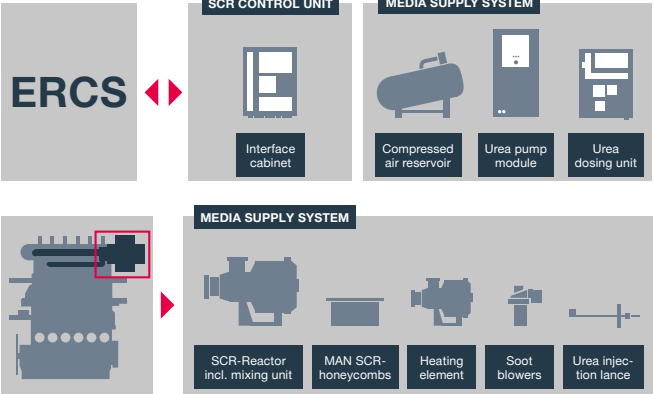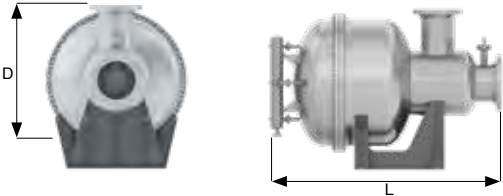

## MAN SCR-HP

The MAN SCR-HP is a small and compact NO<sub>x</sub> emission reduction system. The most compact design in the market allows for easy integration, and the few frame sizes will cover the entire two-stroke portfolio up to 25 MW per SCR reactor.


The integrated mixing unit reduces the overall length and volume. The specific honeycombs ensure a compact design.

The MAN SCR-HP can be mounted in all positions and is capable of running on all fuels.

Auxiliary components like the urea injection lance, urea dosing unit and urea pump module are from MAN's well-proven SCR-LP system.



SCR-HP system

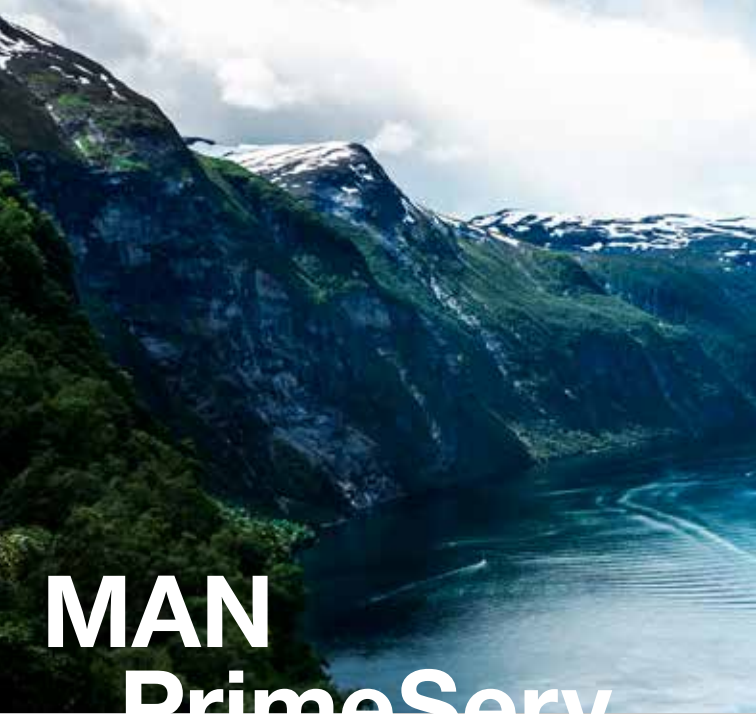

# MAN PrimeServ

The service brand of MAN Energy Solutions



## **MAN PrimeServ**

### **Keeping you moving – Expert hands to guide you**

MAN Energy Solutions' low-speed and medium-speed engines move 50% of global trade, powering one in every two ships plying the world's trade routes. When it comes to powering energy grids, it responds to world-changing trends, such as growing energy demand and growing populations, with smart, efficient and eco-friendly power grid solutions. Whether your business is stationary or marine focused, MAN PrimeServ tailors its services to meet your needs, ensuring service support for all MAN Energy Solutions products, whether manufactured within the MAN Group or by authorised licensees. Taking care of your two-stroke and four-stroke main engines, your GenSets or turbochargers and propulsion packages – you can be sure of well-serviced, efficient, reliable equipment when you need it most.

### **Service with passion**

MAN Energy Solutions offers a strong after sales service with a clear performance commitment, qualified and reliable experts and tailor-made solutions – all combined in our global service brand MAN PrimeServ. Our approach is simple, yet effective: Premium service performed with passion meeting your needs. We listen and provide optimum flexibility and reliability in the services we offer. Straddling the globe with a network of more than 100 service centres, MAN PrimeServ is fully primed to provide local expertise, wherever you are and whenever you need it.

### **The right spare parts, when you need them**

MAN spare parts are designed and manufactured for you to use precisely in conjunction with MAN equipment. Tried and tested, MAN spare parts are backed by more than 250 years of experience and ongoing research, as well as customer feedback, aimed entirely at increasing the performance of your engines.

For the ultimate peace-of-mind MAN spare parts come with a warranty. The MAN PrimeServ network assures, a reliable supply chain, giving you privileged access to the best parts wherever and whenever you need them, right throughout your equipment's life cycle. MAN PrimeServ is the only class-approved supplier to all MAN-designed engines.

## MAN PrimeServ

### Optimised equipment – Your partners for retrofit solutions

MAN PrimeServ offers advanced retrofit solutions to optimise the reliability, economic efficiency, and environmental sustainability of existing equipment.

Make the most of retrofit solutions that are tailor-made for your specific machinery and concepts involving not only the core machine itself, but also the auxiliary systems, instruments, and controls your equipment requires. By improving efficiency, and thus performance, these solutions ensure savings on fuel oil and lube oil, while enabling flexible operation, increasing time between overhauls, and hence reduce maintenance. Not only can you extend the lifecycle of your engines, but you can also meet new environmental regulations, joining the road to energy transition and decarbonisation.

### Competent OEM service when and where you need it

OEM service is the logical step from the very outset when your equipment is installed and commissioned. Highly-skilled MAN PrimeServ engineers ensure quality 24-hour service for your equipment, advising and acting on



## MAN PrimeServ

all technical matters, with the ultimate goal of guiding you and your employees towards the optimal performance of your system.

By choosing MAN OEM technical assistance around the globe, you reap the benefits of genuine OEM parts and expertise, reducing downtime, enabling more efficient operation and hence lowering running costs, while extending engine life and increasing productivity.

### **Service agreements – Focused on your service needs**

When it comes to operating, maintaining or managing your equipment, MAN PrimeServ offers a wide range of service and spare parts agreements for the electric power generation, marine and offshore business sectors. Your service needs are met on all levels, from supplying spare parts or supervising overhauls, to managing complete power stations. Manage your costs with confidence. MAN PrimeServ service agreements may have different names, but they are all drawn up individually to match your individual demands and expectations, putting you in the enviable position of being able to estimate your maintenance costs in advance. Once your equipment is in the expert hands of MAN PrimeServ you can return your main focus to your core business.

### **Digital service solutions – Digital and human expertise**

PrimeServ Assist has been developed to bring you cutting-edge service solutions, where advanced digital analytics are coupled with human expertise to effectively monitor your machinery 24/7, 365 days a year, no matter where you are. Maintenance advice and ad-hoc notifications will immediately be given to you if we detect any anomalies, all through the MAN CEON platform. With PrimeServ Assist, you are getting competent technical support proactively, straight to your PC or mobile device. This type of smart service ensures the most reliable operation of your MAN engine.

### **eLearning – Wherever, whenever**

Properly training your technical personnel is paramount to the safe and efficient operation of your business. The MAN PrimeServ Academy Network ensures the professional qualification of your employees in

## MAN PrimeServ

machine operation, maintenance and troubleshooting. When your employees attend any of the 13 academies located in Europe, North and South America and Asia, they will receive hands-on instruction on full-scale machinery and simulators. With expertly-trained personnel and quality machinery your business can only succeed.

In times of digitisation eLearning is needed to complement the MAN PrimeServ Academy course offering. Therefore, we are continuously developing our eAcademy. eLearning is flexible, self-paced and can be carried out any time and any place. Participants have the ability to learn at their own pace, and at times that are convenient for their personal schedule. Furthermore, they can pick and choose the content most important for their daily work, or areas where they feel they need to increase their knowledge in.

### Worldwide service network

MAN PrimeServ is represented in all key markets and major ports with a large number of service centres worldwide. Our hubs are equipped with advanced technologies for repairs, and our skilled field service managers provide first class technical support for your benefit – 24/7, 365 days a year. All united in PrimeServ: an excellent network, optimised processes, technical competence, and high service-orientation.

### Service workshops – More than 40 workshops around the globe

No matter where you operate there's a good chance a MAN PrimeServ workshop is nearby. More than 40 workshops around the globe carry all the tools and systems needed to conduct complete overhauls of engines, components, and auxiliary systems, including turbochargers, governors and electronic controls.

Providing you with support when the unforeseeable happens, MAN PrimeServ workshops are there to get you back in control and fast. With quick and effective response, the worldwide network ensures anything from technical support to complex repairs in the event of unexpected damage.

**MAN PrimeServ** HOMEPAGE





# Contacts



# Headquarters

## Germany

Four-stroke propulsion engines and systems, GenSets, turbochargers and exhaust gas systems

### **MAN Energy Solutions SE**

Stadtbachstrasse 1

86153 Augsburg

Tel.: +49 821 322 0

info-aug@man-es.com

## Germany

Gas-, steam turbines, compressors

### **MAN Energy Solutions SE**

Steinbrinkstraße 1

46145 Oberhausen

Tel.: +49 208 692 1

turbomachinery@man-es.com

## Denmark

Two-stroke propulsion engines and systems, GenSets

### **MAN Energy Solutions SE**

#### **MAN B&W**

Teglholmegade 41

2450 Copenhagen SV

Tel.: +45 3385 1100

info-cph@man-es.com

## Denmark

Propellers, aft ship and propulsion control systems

### **MAN Energy Solutions SE**

#### **MAN Alpha**

Niels Juels Vej 15

9900 Frederikshavn

Tel.: +45 9620 4100

info-frh@man-es.com

## Czech Republic

Turbochargers and exhaust gas systems

### **PBS Turbo s.r.o.**

Velká Bíteš

Vlkovská 279

595 01 Velká Bíteš

Tel.: +420 566 822 201

pbst\_sales@pbsvb.cz

## France

Mechanical and electric propulsion engines

### **MAN Energy Solutions**

#### **France SAS**

#### **S.E.M.T. Pielstick**

Avenue de Chatonay Porte n° 7

BP 427

44615 Saint-Nazaire

Tel.: +33 2 40 90 65 00

info-fr@man-es.com

# Headquarters

## United Kingdom

Four-stroke propulsion engines

**MAN Energy Solutions UK Ltd.**

Original Brands of: Mirrlees Blackstone; Ruston and Paxman

1 Mirrless Drive

Hazel Grove

Stockport

Cheshire SK7 5BP

Tel.: +44 161 483 1000

primeserv-uk@man-es.com

## Sweden

Fuel gas supply systems

**MAN Energy Solutions**

**Sverige AB**

MAN Cryo

Oljevägen 105

41878 Gothenburg

Tel.: +46 31 176295

cryo@man-es.com

## Switzerland

Axial-, centrifugal compressors,  
complete compressor packages

**MAN Energy Solutions**

**Schweiz AG**

Hardstraße 319

8005 Zürich

Tel. +41 44 278 20 71

info-zur@man-es.com

# International group companies

## Argentina

### **MAN Energy Solutions Argentina S.A.**

Armenia 3575  
CP B1605BOH - Munro  
Prov. Buenos Aires  
Tel.: +54 11 5236 6006/07  
guillermo.lemo@man-es.com

## Australia

### **MAN Energy Solutions Australia Pty., Ltd.**

Building 2,  
202 Fairfield Road Yennora NSW  
2161  
Sydney  
Tel.: +61 2 8874 0700  
jeffrey.moloney@man-es.com

## Bangladesh

### **MAN Energy Solutions Bangladesh Ltd.**

Crystal Palace, 9th Floor  
SE (D) 22, Road 140  
Gulshan South Avenue, Gulshan-1  
Dhaka-1212  
Tel.: +880 96 12112211  
atif.siddique@man-es.com

## Belgium

### **MAN Energy Solutions Benelux N.V.**

Noorderlaan 181  
2030 Antwerpen  
Tel.: +32 3 543 8500  
dirk.willems@man-es.com

## Brazil

### **MAN Energy Solutions Brasil Ltda.**

Avenida Rio Branco,  
nº 311, 9º andar  
Centro  
CEP 20040-009  
Rio de Janeiro, RJ  
Tel.: +55 21 3506 2151  
jens.hueren@man-es.com

## Bulgaria

### **MAN Energy Solutions Bulgaria EOOD**

7 Al. Dyakovich, Floor 5, Office 1  
9000 Varna  
Tel.: +359 52 33 59 60  
valentin.yankov@man-es.com

## Canada

### **MAN Energy Solutions Canada Ltd.**

1177 West Hastings Street  
Suite 1930  
V6E-2K3 Vancouver, BC  
Tel.: +1 905 842 2020  
manish.jethra@man-es.com

## Chile

### **MAN Energy Solutions Chile Ltda.**

Parcela 291  
- sector Placilla de Peñuelas  
Ruta 68 - Km. 98  
Valparaíso  
Tel.: +56 32 235 1500  
gabriel.guevara@man-es.com

## International group companies

### China

#### **MAN Energy Solutions Shanghai Logistics Co., Ltd.**

Zhangjiang Hi-Tech Park, East Area,  
No 279 Ren Qing Road  
Heqing - Pudong  
201203 Shanghai  
Tel.: +86 21 3891 9600  
pan.ke@man-es.com

### China

#### **MAN Energy Solutions China**

Production  
Branch Office Dalian  
10-6-12, North East Seven Street  
Development Zone  
Dalian 116600  
Tel.: +86 411 3967 6780  
yan.guiwang@man-es.com

### China

#### **MAN Energy Solutions Shanghai Co. Ltd.**

Branch Office Guangzhou  
No. 828 Mao Gang Road,  
Huangpu District  
Guangzhou 510700  
Tel.: +86 20 3238 7997  
jane.tan@man-es.com

### Colombia

#### **MAN Energy Solutions Colombia**

Branch Office of Chile  
Av. Cra. 7 No. 127-48, Oficina 1009  
Centro Empresarial 128  
Bogotá D.C.  
Tel.: +57 312 432 5521  
juan.salguero@man-es.com

### Cyprus

#### **MAN Energy Solutions Cyprus**

Office 403, Taitou Court  
2M Koutsofta Str.  
3031 Limassol  
Tel.: +357 25 342 379/746/082  
hans.odgaard@man-es.com

### Egypt

#### **MAN Energy Solutions Egypt LLC**

Office G19 Katameya Heights  
Business Center  
Katameya New Cairo  
11771 Cairo  
Tel.: +20 2 20200 462  
amr.tahoun@man-es.com

### Ecuador

#### **MAN Energy Solutions Ecuador**

Branch office of Chile  
Edificio Ambar, Piso 10 Oficina  
1002  
Av. Portugal E10-77 y  
República del Salvador  
Quito  
Tel.: +593 233 31344  
carlos.solano@man-es.com

### France

#### **MAN Energy Solutions France SAS**

Bâtiment Luminis  
91, rue Jean Jaurès  
92800 Puteaux  
olivier.condemine@man-es.com

## International group companies

### Germany

#### **MAN Energy Solutions SE**

Representative Office  
Rossweg 6  
20457 Hamburg  
Tel.: +49 40 7409 360  
ruediger.schmidt@man-es.com

### Greece

#### **MAN Energy Solutions Hellas Ltd.**

Akti Miaouli 89  
185 38 Piraeus  
Tel.: +30 210 45 87 900  
dionissis.christodouloupoulos@man-es.com

### Guatemala

#### **MAN Energy Solutions Guatemala Ltda.**

6a. avenida 1-36 Zona 14  
Edificio Plaza Los Arcos Of. 4B  
01014 Guatemala City, C.A.  
Tel.: +502 2368 2744  
oscar.martinez@man-es.com

### Hong Kong

#### **MAN Energy Solutions Hong Kong Ltd.**

5/F, No. 1-7, Sai Tso Wan Road  
Tsing Yi Island, N.T.  
Hong Kong SAR  
Tel.: +852 2527 1368  
jeffrey.ang@man-es.com

### India

#### **MAN Energy Solutions India Private Ltd.**

E-73, MIDC Waluj 431 136  
Aurangabad - 431136  
Maharashtra  
Tel.: +91 240 2566 700  
umesh.upadhye@man-es.com

### India

#### **MAN Energy Solutions India Private Ltd.**

Branch Office New Delhi  
407. DLF Tower-B  
Jasola  
New Delhi-110025  
Tel.: +919 5604 32555  
sandeep.chowdhury@man-es.com

### Indonesia

#### **PT MAN Energy Solutions Indonesia**

Unit #17-01, 17th Floor Menara  
Palma  
Jl. H.R. Rasuna Said,  
Block X2 Kav. 6  
12950 Jakarta  
Tel.: +62 21 5795 7490  
goetz.kassing@man-es.com

### Italy

#### **MAN Energy Solutions s.r.l.**

Via Ponte Caracciolo, 1  
16126 Genova  
Tel.: +39 010 209 1637  
marco.colombo@man-es.com

## International group companies

### Japan

#### **MAN Energy Solutions Japan Ltd.**

PMO Nihonbashi Odemmacho  
Bldg. 5F

6-8 Nihonbashi Odemmacho

Chuo-ku

Tokyo 103-0011

Tel.: +81 3 6667 2461

kimihiko.sugiura@man-es.com

### Malaysia

#### **MAN Energy Solutions Malaysia Sdn Bhd**

Suite 3.01, 3rd Floor Kenanga  
International

Jalan Sultan Ismail

50250 Kuala Lumpur, Malaysia

Tel.: + 603 2162 0410

ernst.geyer@man-es.com

### Mexico

#### **MAN Energy Solutions Mexico S. de R.L. de C.V.**

Sierra Candela 111-116, C.P. 11000

Col. Lomas de Chapultepec

Mexico, D.F.

Tel.: +52 1 55 1333 1906

jaime.zubillaga@man-es.com

### Netherlands

#### **MAN Energy Solutions Benelux B.V.**

Schiekade 36

3125 KJ Schiedam

(Port of Rotterdam)

Tel.: +31 10 272 4500

dirk.willems@man-es.com

### New Zealand

#### **MAN Energy Solutions New Zealand Ltd.**

Naval Dockyard PO Box 32-061

Queens Parade, Devonport

Auckland 0744

Tel.: +61 2 8874 0701

jeffrey.moloney@man-es.com

### Norway

#### **MAN Energy Solutions Norge A/S**

Haakon VII's gate 1

0161 Oslo

Tel.: +47 2201 7190

erik.dahl@man-es.com

### Pakistan

#### **MAN Energy Solutions Pakistan Private Ltd.**

16-Km Raiwind Road

Lahore-55150

Tel.: +92 42 3533 0091 3

imran.ghani@man-es.com

### Panama

#### **MAN Energy Solutions Panama Enterprises Inc**

Special Economic Area Panama  
Pacifico

3870, Las Brujas Avenue

Arraijan, Panama

Tel.: +507 236 1594

oscar.martinez@man-es.com

# International group companies

## Peru

### **MAN Energy Solutions Peru S.A.C.**

Av. Argentina 2415  
Cercado de Lima, Lima 01  
Tel.: +51 1 6284756  
carlos.constante@man-es.com

## Philippines

### **MAN Energy Solutions Philippines Inc.**

Km. 17, West Service Road  
Cervantes Compound Brgy.  
Marcelo Green  
South Superhighway  
Paranaque City, 1700  
Tel.: +63 2 776 3369/3347  
sebastien.marchand@man-es.com

## Poland

### **MAN Energy Solutions Poland Sp. z o.o.**

ul. Lubowidzka 43  
80-174 Gdansk  
Tel.: +48 58 325 33 90  
Mob: +48 502 536 800  
andrzej.krupa@man-es.com

## Portugal

### **MAN Energy Solutions Portugal, Unipessoal, Lda.**

Avenida do Rio Tejo, lote 3  
Parque Industrial Sapac Bay  
2910-440 Setúbal  
Tel.: +351 265 799 500  
antonio.penaforde@man-es.com

## Qatar

### **MAN Energy Solutions Qatar Navigation L.L.C.**

Ein Khalid Commercial Building  
Street 523, Watar Navigation,  
PO Box 153  
State of Qatar, Doha  
Tel.: +974 4015 9150  
oleb.nielsen.a@man-es.com

## Russia

### **MAN Energy Solutions Russia Ltd.**

Preobrazhenskaya square 8,  
block A, 13 floor  
107061 Moscow  
Tel.: +7 495 258 36 70  
enrico.enghardt@man-es.com

## Russia

### **MAN Energy Solutions Russia Ltd.**

Branch Office St. Petersburg  
Vozdukhoplavatel'naya dom 19  
196084 St. Petersburg  
Tel.: +7 812 449 2655  
alexander.danilenko@man-es.com

## Saudi Arabia

### **MAN Energy Solutions Saudi Arabia LLC**

Madina Road,  
Al Thinayyan Building  
P.O.Box: 55990  
Jeddah 21544  
Tel.: +966 2 639 4346  
abdullah.kuzkaya@man-es.com

## International group companies

### Senegal

#### **MAN Energy Solutions Senegal SARL**

Derrière cité Faycal  
En face de la clinique du Golf  
Cambérène  
Dakar  
Tel.: +221 33 867 79 77  
abdou.fofana@man-es.com

### Singapore

#### **MAN Energy Solutions Singapore Pte. Ltd.**

29 Tuas Avenue 2  
Singapore 639460  
Tel.: +65 6349 1600  
olaf.gunia@man-es.com

### South Africa

#### **MAN Energy Solutions South Africa (Pty) Ltd.**

14 North Reef Road,  
Elandsfontein, 1406  
PostNet Suite 233, Private Bag X19  
Gardenvue, 2047  
Tel.: +27 11 842 0700  
robin.watson@man-es.com

### South Africa

#### **MAN Energy Solutions South Africa (Pty) Ltd.**

Branch Office Durban  
Unit 1 Table Bay Industrial Park  
Milner Street  
7405 Paarden Eiland  
Durban  
Tel.: +27 31 301 2999  
derick.swanepoel@man-es.com

### South Africa

#### **MAN Energy Solutions South Africa (Pty) Ltd.**

Branch Office Cape Town  
1 Table Bay Industrial Park,  
Milner St.  
Paarden Eiland 7405  
Cape Town  
Tel.: +27 21 514 3360  
norman.hall@man-es.com

### South Korea

#### **MAN Energy Solutions Korea Ltd.**

54, Noksansandan 261-ro 74beon-  
gil,  
GangSeo-Gu,  
Busan 46754  
Tel.: +82 51 635 6644  
tommyr.rasmussen@man-es.com

### Spain

#### **MAN Energy Solutions Espana, S.A.U.**

Calle Pedro Teixeira, 8-10  
Edificio Iberia Mart  
28020 Madrid  
Tel.: +34 91 411 1413  
pablo.montes@man-es.com

### Spain

#### **MAN Energy Solutions Canarias, S.L.**

Branch Office Gran Canaria  
Muelle Reina Sofia s/n  
Puerto de Las Palmas  
Las Palmas de Gran Canaria  
35008  
Tel.: +34928 935 959  
pablo.montes@man-es.com

## International group companies

### **Sri Lanka**

#### **MAN Energy Solutions Lanka (Pvt) Ltd.**

No. 57/8, Sir Ernest De Silva  
Mawatha  
Colombo 00700  
Tel.: +94 11 2678930  
karthik.nithiyanandam@man-es.  
com

### **Sweden**

#### **MAN Energy Solutions Sverige AB**

Oljevägen 105  
41878 Gothenburg  
Tel.: +46 31 176 295  
roger.goethberg@man-es.com

### **Taiwan**

#### **MAN Energy Solutions Taiwan Ltd.**

14F-1, No. 8, Min Chuan 2nd Road  
Chienchen  
80661 Kohsiung  
Tel.: +886 7 537 2225  
lance.phang@man-es.com

### **Turkey**

#### **MAN Energy Solutions Servis ve Ticaret Ltd. Sti.**

Kore Sehitleri Caddesi, Istanbul  
Binasi, No: 16/1 K:4 D:41  
34394 Esentepe, Zincirlikuyu,  
Sisli - Istanbul  
Tel.: +90 2165 819 900  
timur.iyi@man-es.eu

### **United Arab Emirates**

#### **MAN Energy Solutions Middle East LLC**

Jumeira Beach Road  
At Drydocks World Dubai  
P.O. Box 57091  
Dubai  
Tel.: +971 4 345 40 45  
patrice.mauger@man-es.com

### **United Kingdom**

#### **MAN Energy Solutions UK Ltd.**

Hythe Hill  
Colchester  
Essex, CO1 2HW  
Tel.: +44 1206 795 151  
adam.green@man-es.com

### **United Kingdom**

#### **MAN Energy Solutions UK Ltd.**

Branch Office Redhill  
Betchworth House  
57-65 Station Road  
Redhill  
Surrey, RH 1 1 DL  
Tel.: +44 1737 779 429  
richard.guest@man-es.com

### **USA**

#### **MAN Energy Solutions North America Inc.**

1600A Brittmoore Road  
Houston, TX 77043  
Tel.: +1 832 209 3400  
anthony.ruegger@man-es.com

## International group companies

### USA

#### **MAN Energy Solutions North America Inc.**

Branch Office Ft. Lauderdale  
551 S.W. 13th Terrace  
Pompano Beach, FL 33069  
Tel.: +1 954 960 6700  
thomas.leander@man-es.com

### Vietnam

#### **MAN Energy Solutions Singapore Pte. Ltd.**

Branch Office Hanoi  
Unit 9, Second Floor,  
International Central  
17 Ngo Quyen, Hoan Kiem  
Hanoi  
Tel.: +84 4 3936 9728  
hoanghai.tran@man-es.com

## List of licensees

### Symbols used:

- T: MAN Energy Solutions two-stroke licence
- F: MAN Energy Solutions four-stroke licence
- FS: MAN Energy Solutions four-stroke SEMT Pielstick licence
- TC: MAN Energy Solutions turbocharger licence
- FP: MAN Energy Solutions fixed pitch propeller license

### **China, The People's Republic of**

#### **China Shipbuilding Industry Corporation Diesel Engine Co., Ltd. (T)**

Tel.: +86 532 86708080 6908

#### **CNPC Jichai Power Equipment Company (F)**

Tel.: +86 (531) 8742 2692

xuchuanguo@cnpc.com.cn

#### **CSSC Marine Power Co., Ltd. (T, F)**

Tel.: +86 (511) 845 11 273

cssc-cmp@cssc-cmp.cn

#### **CSSC-MES Diesel Co., Ltd. (T)**

Tel.: +86 (21) 6118 6666

market@shcmd.com.cn

#### **Dalian Marine Diesel Co. Ltd. (T)**

Tel.: +86 (411) 8441 7273

dmd@online.in.cn

#### **Dalian Marine Propeller Co., Ltd (FP)**

Tel.: +86 (411) 8444 2866 8103

sale@dmpp.cn

#### **Hefei Rong An Power Machinery Co., Ltd. (T)**

Tel.: +86 (551) 87 88888-9977

#### **Henan Diesel Engine Industry Co., Ltd. (F)**

Tel.: +86 (379) 6407 6724

cys@hnd.com.cn

## List of licensees

### **Hudong Heavy Machinery Co., Ltd. (T, F, FS)**

Tel.: +86 (21) 51 31 00 00

+86 (21) 58 71 30 07

hbm@hbm.com.cn

### **JingJiang Dingkun Machinery Co. Ltd. (T)**

Tel: + 86 523 82355998

### **Qingdaohaixi Marine Diesel Co., Ltd. (T)**

Tel.: +86 (532) 8670 8080

sales@qmdltd.com.cn

### **Shaanxi Diesel Engine Heavy Industry Co., Ltd. (F, FS)**

Tel.: +86 (29) 3831 3596

+86 (29) 3831 4380

sxd408@sxdinfo.com.cn

### **Shanghai Qiyao Engine Co., Ltd. (SQE) (F, TC)**

Tel.: +86 (21) 3131 0648

sqe-tech@csic711.com

### **Weichai Heavy Machinery Co., Ltd. (F)**

Tel.: +86 (536) 209 8105

julidj@weichai.com

### **Yichang Marine Diesel Engine Co., Ltd. (T)**

Tel.: +86 (717) 646 86 89

market@ymd.com.cn

### **Yuchai Marine Power Co. Ltd. (T)**

Tel: + 86 756 5888600

sales@ycmp.com.cn

### **Zhenjiang Tongzhou Propeller Co., Ltd (FP)**

Tel.: +86 (511) 8198 2822

zhangjinlong@zjtpp.com

### **Czech Republic**

#### **PBS Turbo s.r.o. (TC)**

Tel.: +420 (566) 822 201

# List of licensees

## India

### **MAN Energy Solutions India Ltd. (F)**

Tel.: +91 (240) 2566 700

## Japan

### **Hitachi Zosen Corporation (T)**

Tel: +81 (3) 6404 0141

de-info@hitachizosen.co.jp

### **JFE Engineering Corporation (FS)**

Tel: +81 (45) 505 7914

hoshino-minoru@jfe-eng.co.jp

### **Kawasaki Heavy Industries Ltd. (T, F, TC, FS)**

Tel: +81 (3) 3435 2313

hashimoto\_h@khi.co.jp / takano\_hi@khi.co.jp

Kawasaki Sub-licensee:

### **The Hanshin Diesel Works Ltd. (T)**

Tel: +81 (78) 332 2081

overseas-section@hanshin-dw.co.jp

### **Mitsubishi Heavy Industries Engine & Turbocharger, Ltd. (F)**

Tel: +81 (42) 763 1594

gmmp383621b10g04@mhiet.mhi.co.jp

### **Mitsui E&S Machinery Co., Ltd. (T, TC)**

Tel: +81 (3) 3544 3475

meseba99@mu.mes.co.jp

Mitsui Sub-Licensee:

### **Makita Corporation (T)**

Tel: +81 (87) 821 5501

webmaster@makita-corp.com

Mitsui Sub-Licensee:

### **Diesel United, Ltd. (T)**

Tel: +81 (3) 3257 8222

info@du.ihl.co.jp / saburo\_aiso@du.ihl.co.jp

## List of licensees

### **Niigata Power Systems Co., td. (FS)**

Tel: +81 (3) 4366 1200 / +81 (3) 4366 1203

webmaster1@niigata-power.com / naofumi\_murakami@niigata-power.com

### **Diesel United, Ltd. (FS)**

Tel: +81(3)3257-8222

info@du.ihl.co.jp / saburo\_aiso@du.ihl.co.jp

### **Poland**

#### **FSA – Fabryka Silników (F)**

Agregatowych i Trakcyjnych Sp z o.o.

Tel.: +48 (61) 831 1941

### **South Korea**

#### **HSD Engine Co., Ltd. (T, F, FS)**

Tel.: +82 (55) 260 6154

sangsoo1.lee@doosan.com

#### **Hyundai Heavy Industries Co., Ltd. (T)**

Engine & Machinery Division

Tel.: +82 (52) 202 7281

enginesales@hhi.co.kr

#### **STX Engine Co., Ltd. (F, T)**

Tel.: +82 (55) 280 0568

sowy@onestx.com

#### **STX Heavy Industries Co., Ltd. (T)**

Tel.: +82 (55) 280 0609

sangeui.kim@onestx.com

#### **STX Heavy Industries Co., Ltd. (TC)**

Tel.: +82 (55) 280 0715

hsk@onestx.com

## List of licensees

### Spain

#### **Navantia S.A. (F)**

Fábrica De Motores Cartagena

Tel.: +34 (968) 128 200

navantia@navantia.es

### USA

#### **Fairbanks Morse Engine (F, FS)**

Tel.: +1 (608) 364 8119

patrick.bussie@fairbanksmorse.com

## Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]



Copyright 2019 © MAN Energy Solutions, branch of MAN Energy Solutions SE, Germany, registered with the Danish Business Authority under CVR No.: 31611792, (herein referred to as “MAN Energy Solutions”).

This document is the product and property of MAN Energy Solutions and is protected by applicable copyright laws.  
Subject to modification in the interest of technical progress.  
Reproduction permitted provided source is given.  
4510-0018-01web Apr 2019